The Small Computer Magazine

cilobaud

Understandable for beginners . . . interesting for experts

September 1978 / Issue #21 / \$2.00 / DM 8 / Sfr 8 / Ffr 18 / Sweden Kr 21 / UK £2

| R. M. Law, D. C. Mitchell | 22 | (Con)text Editor versatile and manageable |
|---------------------------|------|--|
| Bill Welborn | 32 | At Last: A Client Timekeeping System beautiful for billing |
| Ralph Tenny | 40 | Troubleshooters' Guide useful troubleshooting tips for micro |
| Mickey Ferguson | 46 | Metric-American Conversion Program |
| Steven B. Lionel | 52 | The Heath/DEC Connection Part 1: overview |
| Mark Herro | 56 | Home System Demo Program beyond games |
| George Young | 58 | Do-It-All Expansion Board for KIM |
| Jack A. Inman | 62 | Tally Ho! fox and hounds game |
| J. R. Haglund, W. B. Reed | - 66 | Baudot Interface Cookbook guide to low-cost hard copy |
| Gary J. Shannon | 80 | Error-Correcting Techniques for micro systems |
| Don Ketchum | 82 | KIM Organ played from the keypad! |
| Peter A. Stark | 84 | Kilobaud Klassroom No. 12: ROM and RAM memories |
| Tim Ahrens | 92 | Motorola's Latest: The MC6802 a home-brewer's report |
| Ed Juge | 96 | TRS-80 Update: Level II BASIC and what it can do |
| James Grina | 100 | Super Cheap 2708 Programmer build your own |
| Heinz Gf. Matuschka | 106 | Something Extra in Mass Storage Meca's Alpha-1 |
| William I Colsher | 112 | From Big BASIC to Tiny BASIC some intriguing tricks |





The OSI 48 Line BUS

OHIO SCIENTIFIC offers the broadest line of BUS compatible microcomputer boards. This line includes several new and exciting products which are not available anywhere else, such as a three processor CPU board, dual port memories and a multiprocessing CPU expander.

OHIO SCIENTIFIC has delivered approximately 100,000 boards based on our 48 line BUS and is now delivering thousands per week in 17 models of computers and dozens of accessories.

OHIO SCIENTIFIC'S BUS design incorporates high band width, high density and mass production technology to achieve a truly remarkable performance to cost ratio.

Here is just a sampling of the many OSI 48 BUS compatible boards available for the systems user, prototyper, OEM user and experimenter.

| Product Description | Special Features | Power Supply Voltages Req'd | Board Part # | & Doc. Price | Assemble Part # | ed Product Price |
|---|---|--|-------------------|-----------------|----------------------|----------------------------|
| CPU • Challenger II CPU BASIC in ROM 6502 based CPU with serial I/O | Can use four 2716 EPROMS instead of BASIC or can be | + 5/ - 9 | 500 | 39.00 | C2-0 | 298.00 |
| 4K RAM, machine code monitor Challenger III CPU has 6502A, 6800 and Z80 micros, RS-232 serial port, | configured for disk 1 megabyte memory manager, software program | + 5/ - 9 | 510 | NA | C3-0 | 490.00 |
| machine code monitor • 560Z multi-processing CPU expander runs PDP-8, Z80 and 8080 code | mable vectors • Runs concurrently with another OSI CPU | + 5/ - 9 | 560Z | 125.00 | NA | NA |
| • 16K static RAM (Ultra low power) | 215NS access time automatic power down standby mode | + 5/ + 12/ – 9 | 520 | 35.00 | CM-3 | 498.00 |
| 8K static RAM (low cost)16K static RAM (low cost) | Expandable to 16K Can be expanded to dual port operation | + 5 + 5 | — 525 | 35.00 | CM-7 CM-8 | 198.00 339.00 |
| 24K static RAM (high density)4K static RAM (2102 based) | 20 address bits Can be populated for 4K by 12 bits | +5 +5 | 527 420 | 35.00 35.00 | CM-9 CM-2 | NA 125.00 |
| 16K dynamic (ultra low cost) 32K dynamic 48K dynamic (high density) | Uses 4027 RAMS 20 address bits 20 address bits | + 5/ + 12/ - 9 + 5/ + 12/ - 9 + 5/ + 12/ - 9 | 530 530 530 | NA NA NA | CM-4 CM-5 CM-6 | 249.00 698.00 990.00 |
| EPROM Boards • 8K 6834 EPROM board | 16 line parallel port and on board programmer | + 5/ - 9 | 450 | 35.00 | NA | NA |
| 4K 1702A EPROM board | 16 line parallel port | + 5/ - 9 | 455 | 35.00 | NA | NA |
| I/O Boards • Audio Cassette interface Kansas City standard 300 baud | • Expandable to CA-7C | + 5/ – 9 | 430 | 35.00 | CA-6C | 99.00 |
| RS-232 port board Combination audio cassette two bit DACs, one fast A/D and 8 channel input mux | Expandable to CA-7S Also Features 8 parallel I/O lines | + 5/ – 9 + 5/ – 9 | 430 430 | 35.00 35.00 | CA-6S CA-7C | 99.00 399.00 |
| Combination RS-232 two 8 bit DACs, one fast A/D and 8 channel input mux | Also features 8 parallel I/O lines | + 5/ - 9 | 430 | 35.00 | CA-7S | 399.00 |
| 32 by 32 character video display interface | Keyboard input port | + 5/ - 9 | 440 | 35.00 | NA | NA |
| 32 by 64 character video display interface | Upper/lower case graphics and keyboard port | + 5 | 540 | NA | CA-11 | 249.00 |
| 16 port serial board RS-232 and/or high speed synchronous | 75 to 19,200 baud and 250K and 500K bit rates individually strappable | + 5/ – 9 | 550 | 35.00 | CA-10X | 200.00 to 900.00 |
| Parallel (Centronics) Line Printer Interface | With cable | + 5/ - 9 | 470 | NA | CA-9 | 249.00 |
| 96 Line Remote Parallel Interface | Interface "Front End" remotable via 16 pin ribbon cable | +5 | - | - | CA-12 | 249.00 |
| Voice I/O board with Votrax* module | Fully assembled voice output, experimental voice input | + 5/ – 9 | _ | - | CA-14 | 525.00 |
| DISKS • Single 8" floppy disk, 250 Kbytes storage | Complete with operating system software and disk BASIC | + 5/ – 9 | 470 | NA | CD-1P | 790.00 |
| Dual 8" floppy disk, 500 Kbytes storage | Complete with operating system software and disk BASIC | + 5/ - 9 | 470 | NA | CD-2P | 1390.00 |
| 74 Million byte Winchester disk and interface | Complete with OS-65U operating system | + 5/ – 9 | <u>-</u> | | CD-74 | 6000.00 |
| 8 slot backplane board with connectors | Can be daisy-chained to n-slots | | 580 | 39.00 | NA | NA |
| Prototyping boardCard Extender | Handles over 40 16 pin IC'sWith connectors | = | 495 498 | 29.00 29.00 | = | _ |

For more information, contact your local OHIO SCIENTIFIC Dealer or the factory at (216) 562-3101





If you are interested in an ultra high performance personal computer which can be fully expanded to a mainframe class microcomputer system, consider the C2-8P.

Features:

- Minimally equipped with 8K BASIC-in-ROM, 4K RAM, machine code monitor, video display interface, cassette interface and keyboard with upper and lower case characters. (Video monitor and cassette recorder optional extras.)
- The fastest full feature BASIC in the microcomputer industry.
- Boasts the most sophisticated video display in personal computing with 32 rows by 64 columns of upper case, lower case, graphics and gaming elements for an effective screen resolution of 256 by 512 elements.
- The CPU's direct screen access, coupled with its ultra fast BASIC and high resolution, makes the C2-8P capable of spectacular video animation directly in BASIC.
- Fully assembled and tested: 8 slot mainframe class microcomputer, six open slots for expansion. Supports Ohio Scientific's ultra low cost dynamic RAM boards or ultra high reliability static RAMs.

- The C2-8P can support more in-case expansion than its four nearest competitors combined.
- The C2-8P is the only BASIC-in-ROM computer that can be directly expanded today to a complete business system with line printer and 8" floppy disk drives.
- It is the only personal class computer that can be expanded to support a Hard Disk! (CD-74)

The C2-8P is the fastest in BASIC, has the most sophisticated video display and is the most internally expandable personal computer. Therefore, it should be the highest priced?

Wrong: The C2-8P is priced considerably below several models advertised in this magazine. The C2-8P is just one of several models of personal computers by Ohio Scientific, the company that first offered full feature BASIC-in-ROM personal computers.

For more information, contact your local Ohio Scientific dealer or the factory at (216) 562-3101.

OHIO SCIENTIFIC

1333 S. Chillicothe Road • Aurora, Ohio 44202

UBLISHER'S REMARKS

Wayne Green

How Was NCC?

It beats me why microcomputer firms exhibit at that show. That should be no news to anyone who has been reading my editorials for any length of time. NCC is aimed at the big-frame people and appears to be an enormous waste of time and money for microcomputer people.

The microcomputer exhibits seemed about 100 miles away from the Big Show . . . or at least so it appeared when you got out in the hot sun and waited for the bus. Once you were aboard, the bus seemed to be driving for hours all the way to the opposite end of Disneyland from the Convention Center. In the Disneyland hotel the crowds were OK at the microcomputer show, but just about every exhibitor I talked with had the same observation: These people aren't our customers.

The brutal fact is that the people who go to NCC are, for the most part, from ITT, Ma Bell, U.S. Steel and the major banks. There are spies from IBM, Data General, DEC and all of the other Big Boys looking to see what is happening . . . and how their firms can counter it. Most of the micro exhibitors needed to be

seen by computer store people . . . and they were not there.

We displayed the first samples of our new software cassettes and generated a lot of interest. Since we weren't supposed to sell anything at the show or even take orders, we naturally threw out the innumerable requests for shipment of the programs and some 2000 requests for subscriptions to Kilobaud. You believe that, right? Wouldn't you know that a couple of Japanese would take pictures of the software packages? I'll tell you what, Japan, I'll bet we sell more programs in Japan than you do. Just watch us.

Atlanta Computerfest

It's already getting a little difficult to remember Atlanta as the shows of the past months blend into a sort of blur. It started in April with Percomp at Long Beach. Whether the publicity was lacking, the ads didn't reach anyone or Los Angeles is a stiff for computer shows, the fact is that exhibitors at Percomp were very lonely, often outnumbering the attendees. Even though the perpetrators of this show did not ask me to speak, I did get together two sessions on how to write ads



Wayne, on left, and M. David, in center, translating into French. The gist of the talk was that ways must be devised for software to keep pace with the hardware development in the microcomputer field if we are not to see a customer disillusionment that could result in a severe setback for this rapidly rising industry.



The Microcomputer Expo in Paris did things up in first-class fashion. The only problem was that the place filled up—including the aisles—and the gendarmes got upset about the overflow of people anxious to get into the talk. Here is Wayne addressing the group on the subject of microcomputers and their growth in the U.S. . . . and the desperate need for software.

and spec sheets for the exhibitors. I would have worked up a session for the attendees, but I didn't want to talk to myself.

My talks were judged helpful, and they will be scheduled into the coming Dallas show in September. I think we'll charge \$100 a head for the workshop and limit it to 20 so I can give individual criticism to ads and other literature. It will be worth it.

After Percomp my next show was Birmingham, where they had a hamfest/computerfest. The computer turnout was good here, and interest was high. I talked on software to a packed room . . . I like that. This was in mid-May.

A few days later Sherry and I headed for Europe to attend the Euro-Micro show in Paris. We stopped off in London for a couple of days and visited a newly opened Byte shop and rapped with John Marshall of Nascom, a new manufacturer of microcomputers in the UK. The next stop was Paris for the show. I was on the program to talk about the development of microcomputing in the U.S., and my ego grew to hitherto unknown dimensions when the hall filled up and a great many people had to be turned away.

We sold a lot of subscriptions at our booth, so the show was a definite success.

From Paris we flew to Zurich and then drove down to Geneva to visit the ITU for a day and find out if the staff there had any suggestions on how to counter the Black Bloc, a group of 44 African countries that have been voting together in recent years, upsetting frequency allocations. Unless

something can be done about this situation, there is a possibility that amateur radio might be disenfranchised next year. The ITU staff had little to say that was encouraging.

From Geneva we drove around Switzerland for a day, lunching in Liechtenstein, dropping in on Austria and Germany, and finally returning to Zurich for the flight home.

After one day at home we were off again, this time to Atlanta for the hamfest/computerfest. The hamfest did fine, but the computerfest was not as lively as last year. My talk on software and the opportunities opening in microcomputing to make money was well received.

From there we went directly to Anaheim for NCC, where my talk on software was greeted with a lot of interest and many darned good questions. After NCC we flew up to San Francisco for a day to visit John Peers and Lomac . . . and with Adam, John's computer. While you still have to do a lot of detail work to put a program into Adam, there is no question in my mind that it is far simpler to work with than any other language I've seen so far. If it weren't for the \$40K price and my built-in Yankee thrift, I'd probably have walked out with an Adam on order, just for the fun of working with it.

Just a few minutes working with the Lomac Adam system indicates there is no question that it is time for the computer industry to do some heavy thinking about BASIC and the other languages. It has been proven that it is possible to have a much simpler pro-

gramming language than we've been using.

After getting Adamed, we went to visit the new Byte Shop HQ. They have some exciting plans for setting up a zillion Byte Shops. Under the new ownership, I think they will be better financed and managed.

A lot of growth is being planned for in our industry . . . Computerland has a lot more stores in the works . . . and Tandy Computers is working on a network to cover the entire country. I'll be surprised if we don't have over 10,000 stores by August 1979 . . . counting the Radio Shacks, which are handling TRS-80s.

We rested for a few minutes and then headed for Oakland and dinner with Bill Godbout, George Morrow and Bob Mullen . . . flying out to a restaurant called New West in Godbout Air Force 1. The food was fantastic, but it was difficult to even notice this because we were having so much fun talking. I wish we could videotape a discussion among these three chaps. They are so full of ideas that 100 companies could spin off from a dinner like this.

The next morning Sherry and I were off to Los Angeles, then on to Atlanta as part of our Eastern Airlines special fare trip. For about \$50 less than the round trip to Dallas we were able to get to Atlanta for three days, then L.A., then back to Atlanta (we stayed just one night at the Omni ... what a great place that is!) ... then on to Puerto Rico (we took a taxi downtown to sightsee El Moro, the fort defending the harbor entrance, and then back for our continuing flight) . . . and Martinique. From there we went back to Dallas for the hamfest/computerfest there in mid-June.

The Dallas ham/com didn't do badly for a first show. I gave a talk at 9 AM on Saturday on software, and the room was packed solid. I didn't expect more than a dozen people at that early hour, so I was amazed. Obviously, there were a lot of computer hobbyists turning out for this first microcomputer show in Dallas. This bodes well for the big computer show set for September in Dallas. I understand that just about all of the major firms will be exhibiting at that one.

I passed along my observation of the NCC show to the Tanners, who are running the Dallas show, and they decided to make an extra effort to make this show par-

ticularly attractive to computer store people, with several special sessions on financing, selling, advertising, marketing, etc. They might be able to work this into the biggest show of the year if they keep up such creative planning. I'll be on the program for a couple of talks.

Gold in Them 80s

For some reason Radio Shack seems to be playing it cool on the number of the TRS-80 systems they've been selling. Having personally seen most of the microcomputer factories, I strongly suspect that there are already more TRS-80 systems out there than everything else combined, even going right back to Altair serial-number 1. They are selling a mountain of them.

Oddly enough, though the other microcomputer manufacturers have worried themselves sick over how this might cut into their sales, so far the impact has been as I predicted: more business for everyone. If anyone is hurting for sales it is because their advertising and promotions are bad, not because people are not buying, and there are several firms with painfully poor advertising, sorry to say.

Getting back to the 80 and the possibilities for getting rich with this system: the possibilities are almost endless, if you put your imagination to work on it. Radio Shack is doing a reasonably good job of announcing new gadgets to work with their system, but their facilities and resources are limited, so the fact is that smaller firms will be able to run circles around them.

There are two ways for things to go . . . and I suspect that the second way will predominate. One is for many (or most) TRS-80 owners to buy an S-100 bus transfer unit, either from Radio Shack or some other vendor (I had my hot hands on the official Radio Shack transfer unit the other day, so it does exist, though still in prototype form). Then the S-100 boards for various applications can be used . . . for music, creative art, control of the world, telephone interface, etc.

The other way makes more sense, sorry to report, and that is for firms to come out with gadgets designed to plug into the 80 directly, using its bus. I saw my first such unit at Atlanta where one firm had a little box that plugged into the back of the 80 and produced Morse code when the letters were typed on the key-

board. Interface units that turn out to be popular will eventually be manufactured by Radio Shack, but by the time they lumber into production a small firm will be able to be in and out with perhaps a million or two in sales. Big firms just can't get into production as fast as small ones.

How many TRS-80s are there? Radio Shack admits to over 20,000 . . . and I would put it more in the 50,000 range, with perhaps the present production running close to 10,000 per month. Even with this large number being shipped there is a serious back-order situation. This is to be expected even though Radio Shack hasn't the money problems virtually every other firm in the business has.

With that size of a market out there, the need for accessories is obvious. What are you waiting for?

More Help Needed

Actually we need a whole lot more help... with *Kilobaud* and with the software development. Both appear to have excellent futures.

For *Kilobaud* we have a serious need for a technical editor. This calls for a combination background in microcomputers of hardware, software and systems. We've had this need for some time, and now, with John Craig moving on, the need is even more critical (that translates into more pay). There really isn't any way to run something like that remotely; we tried that and it flat didn't work acceptably for either us or the editor.

Each day at *Kilobaud* brings decisions that have to be made. We can tackle these in a quick (ha!) meeting when everyone is at hand; otherwise the decisions have to be made anyway, only without input from those not present. This inevitably results in paranoia setting in . . . often on both sides of the situation.

We're not sure how many people we'll be needing for our software production, but it will be more than a few. We'll be needing editors with a good knowledge of BASIC who can help evaluate programs submitted for publication. We'll need quality-control people, production people, etc. We'll need writers to prepare the documentation, to write advertising and to prepare catalogs of the programs.

(continued on page 21)

kilobaud

Publisher/Editor

Wayne Green

Executive Vice President Sherry Smythe Assistant Publisher/Editor Jeffrey D. DeTray Managing Editor John Barry **Editorial Assistants** Dennis Brisson Susan Gross Administrative Assistant Dotty Gibson Assistant Business Mgr. Robert LaPointe **Production Department** Manager: Lynn Panciera-Fraser Staff: Craig Brown Gayle Cabana Robert Drew Bruce Hedin Carl Jackson James Lamothe Dion Owens Noel R. Self Robin M. Sloan Typesetting Barbara J. Latti Jennifer Johansson Marie Walz Photography Bill Heydolph Tedd Cluff Associate Editors Tim Barry Bob Buckman Ronal Burris Sheila Clarke Rich Didday Phil Feldman Doug Hogg, PhD Tom Rugg Peter Stark Bookkeeper Knud E. M. Keller Marketing Daniel D. Savage Brian Coleman Judy Waterman Circulation Pauline Johnstone **Customer Service** Joyce Tarr Receptionist Doni-Anne Jarvis Computer Data Control Judy Brumaghim Linda Cate Mary Kinzel Computer Programming Ron Cooke Richard Dykema Steven Lionel Micro-Systems Lab Edward C. Dow, Jr. Mailroom Theresa Toussaint Bill Barry Sue Chandler Ethan Perry Advertising Heidi Kulish Nancy Ciampa Marcia Stone Bill York European Marketing Dir. Reinhard Nedela Australian Distributor Katherine Thirkell

Kilobaud is published monthly by 1001001, Inc., Peterborough NH 03458. Subscription rates in the U.S. and Canada are \$18 for one year and \$36 for three years. In Europe: Kilobaud erscheint montatlich bei Fachzeitschriftenvertrieb Monika Nedela, 7758 Markdorf, Markstr. 3. Abonnement DM 70- plus Porto 7.20 – gesetzt. MWST; Str. 81- plus Porto 7.20 Australia: For subscriptions write—Katherine Thirkell, Sontron Instruments, 17 Arawatta St., Carnegie, VC. 3163 Australia. UK. 220 sterlinglyear—UP Enterprises, 313 Kingston Rd., Ilford, Essex, IGI 191, England Please write for other foreign rates. Second-class postage paid at Peterborough NH 03458 and at additional malling offices. Publication No. 346890. Phone: 603-924-3873. Entire contents copyright 1978 by 1001001, Inc. INCLUDE OLD ADDRESS AND ZIP CODE WITH ADDRESS CHANGE NOTIFICATION.

UK Distributor

L P Enterprises

BOOKS BOOKS

BASIC and the
Personal Computer
Thomas Dwyer,
Margot Critchfield
Addison-Wesley, Reading MA
440 pages, \$12.95

I can say, without reservation. that this is the best BASIC book I have ever seen. Explanations, examples, and applications fill every page. This is certainly not a dry book, and both the novice and not-so-novice will gain much from it. Critchfield and Dwyer make it clear that they fully understand the mechanics of learning. I believe that this would make an excellent text for a BASIC programming class. However, for the book to provide the most benefit, the individual or class should have access to a BASIC computer.

Most of the programs are written in Maxi-BASIC. But just in case your BASIC interpreter does not support all of the features that the authors' does, many variations are provided to allow you to make them fit just about any version. In fact, converting a program to your particular BASIC is also a very good way to get to know it better.

The book starts with an overview of personal computing equipment and programming and then moves into an explanation of the BASIC language. This instruction takes the form of eight hourly sessions, which in turn are broken down into numerous exercises. The practice programs are always interesting.

It is tempting to move too quickly through this area, especially if you already have some BASIC background. You must avoid this temptation as there is much to learn, and each example should be examined and tried. These include computer-assisted educational math, batting averages, craps, balancing a checkbook and many more.

Chapter three goes into computer graphics. A variety of excellent examples for plotting and

scaling is given. Of interest to many will be the Weight Watchers Record, which keeps track of weekly weight gain or loss (you are losing weight aren't you?) and then plots a graph of the results. Saving programs on tape and disk is also covered.

Word processing is the theme of chapter four. String handling and manipulation get special attention. Would you like your computer to write poetry or print your letters for you? How about word games? These are all to be found here.

Chapter five involves matrices and sorting routines. Many different sorting schemes are discussed along with their advantages and disadvantages. Bubble, selection, shell and quick sorts are explained and programmed for you. If you want to sort strings instead of numbers, you can do that also.

Also included in this chapter is the explanation and writing of a football scout's record-keeping and report-writing program. I don't know if we have any scouts in our midst, but the very same programming techniques can be used in many other fields. The generated report relates data in an easily understood manner and displays trends that can be more important than the data itself.

Chapter six concerns computer games. While many games are educational as well as entertaining, whenever you mention computer games you get many different reactions. To some hobbyists games are the beginning and the end of personal computing, while others have no use for them at all. The frequently overlooked fact is that writing or modifying game programs is a very good method of improving your programming skills.

Do you want to write your own games for fun (or profit)? The necessary techniques are well covered. Want to play spies on a grid, poker, crazy eights, or horse race? How about archery or Planet-X landing? These games are all discussed, programmed

and run.

Graphs and computer art are the theme of chapter seven. Now we are getting into more complex algorithms. It took my SOL over two hours to print one page of the electric field intensity display program. The plotting possibilities with a standard alphanumeric terminal are impressive. All kinds of charts and graphs can be generated . . . plot multiple functions, bar graphs or just draw pictures. It can all be done with BASIC if you know how.

When data bases and files are mentioned, many hobbvists dismiss them as business-related items. Nothing could be further from the truth. Most programs have some kind of data base, and for storing and retrieving information, files can't be beat. Three comprehensive programs are detailed in chapter eight; they show the difference between storing data within the program itself and storing it externally in a cassette tape file. Diet information, food data and charge-account records are the examples used.

Chapter nine covers computer simulations. Simulate means to copy, and computer simulations are programs that imitate a real function. For instance, the Planet-X lander game is a primitive simulation of a real landing on the moon. In fact, almost any computer program is simulating something, whether it be dealing cards, playing chess or predicting future business trends. In this chapter there are two major examples; one simulates the interaction between the number of customers and the employee requirements of a retail store and the other the operation of a pseudo-government on a distant planet.

Finally, chapter ten looks ahead to more advanced subjects. Color graphics, light pens, music and analog I/O are some of the items discussed. Four pages of beautiful color plates show the Cromemco Dazzler and the Compucolor units in action. There can be no doubt that all displays will be in color someday.

Given a reasonable amount of attention, this book can't help but benefit the reader. Self tests are scattered throughout. The examples are always easy to understand because of the authors' clear explanations. Anyone planning to write a computer textbook should study the instruction methods used in this book.

Two outstanding features are the Project ideas and the Style corner. Project ideas are suggestions for modifying programs beyond what has been presented in the text. These would make excellent homework assignments for a BASIC classroom situation. The style corner is written by John Nevison and shows some of the programs written using the rules in his book, *The Little Book of BASIC Style*, which is also available from Addison-Wesley Publishing Company.

Authors Critchfield and Dwyer hint that a more advanced volume might follow this one. I certainly hope so because I am thoroughly sold on *BASIC and the Personal Computer*, and I am looking forward to more of the same.

Rod Hallen Tombstone AZ

Z-80 Programming for Logic Design Adam Osborne et al. Osborne & Associates, Inc. Berkeley CA, \$8.50

This book is the third in a series from Adam Osborne that includes similar books for the 8080 and 6800. All three books are designed as follow-ups to An Introduction to Microcomputers from the same author. This book shows you how to write assemblylanguage programs for your Z-80 that simulate the actions of flipflops, gates, timers and other logic elements. Using this technique, you can simulate circuits containing many integrated circuits, thereby reducing the hardware required for any given application.

At the outset, the author demonstrates how to simulate the functions of individual gates and flip-flops, using relatively short assembly-language routines. Virtually any logic function can be implemented with only a handful of assembly-language statements.

The next section of the book puts this basic information to a practical use. The techniques of logic simulation are used to recreate the circuitry needed to control the print wheel of a Qume Q-series or Sprint Series printer. This is a daisy-wheel type printer, and the portion of the printer interface to be simulated contains six flip-flops, three one-shots, a 555 timer and about two dozen gates and inverters. We're taken step by step through the simulation, during which we are shown how each of the logic elements can be simulated. At the conclusion of the chapter, we have written a 140 line assembly-language

(continued on page 21)

THERE'S A NEW ADDITION TO THE HAZELTINE FAMILY...AND

SYNCHRO-SOUND'S GOT IT!



THE ALL-NEW HIGH-PERFORMANCE LOW COST

HAZELTINE 1400 VIDEO TERMINAL

All 128 ASCII Codes • 64 Displayable Characters • High Resolution 5 X 7 Dot Matrix • Cursor Addressing and Sensing EIA Interface • Rates up to 9600 Baud • Self Test

\$27.51 per month* \$799.00 complete

HAZELTINE 1500 **VIDEO TERMINAL**




- Reverse video
- 24 X 80 display
- Programmable brightness levels
- RS232 and current loop . . . and much more

S39.57 per month*

\$1149.00 complete 995.00 kit

HAZELTINE **MODULAR 1** INTELLIGENT **TERMINAL**



- 8 different video
- Full editing capability
- Removable keyboard ...and much more

\$57.14 per month*

\$1659.00 complete



ICHRO-SOUN

193-25 Jamaica Avenue, Jamaica, New York 11423 Dept. HK 212/468-7067 TWX 710-582-5886 West Coast: 5810 Commerce Blvd. Rohnert Park, CA. 94928 • 707/544-2865

ENTERPRISES, INC. Hours 9-4 Daily

and Saturday BankAmericard 36 month lease Maintenance additional **OEM** pricing available

Visit our new showroom Working units on display Master Charge

TROUBLE-, SHOOTERS'

CORNER

Ralph Wells

In an article titled "Cooperation" in the June 1978 Interface Age, John Craig (former editor of Kilobaud) quoted Bob Jones (publisher of Interface Age) as saying, "If we all work together at this thing, then we're all going to be successful together." Last month in this column, I tried to emphasize the importance of just this type of cooperation in the field of troubleshooting and used the phrase synergistic synectics to describe it.

At about the same time I read John's quote, I also received my current (May 20) copy of EDN magazine, containing an article by John Conway entitled "Glitches Can Turn Your 'Simple' Interface Task Into a Nightmare." For anyone interested in troubleshooting microcomputers, this EDN article should be required reading. It recounts the debugging of a glitch in the Apple II and reads like a Sherlock Holmes mystery. It's well illustrated and fascinating reading, but at the end I felt that I'd been on a witch-hunt. There was a haunting feeling that the EDN group might prefer to see the Apple II, its mentor, Steve Wozniak and all 6502 micros in the stocks on a town square in New England.

Glitches-Part II

I'd been contemplating designing in an Apple II as part of a system development for Inmarco (where I work). The requirements called for it to be interfaced to read and write through the 6522 VIA (versatile interface adapter). The gist of the EDN article was that the difficulties in using an Apple II for this purpose were so serious that EDN was considering discontinuing one of the best series of practical development (Apple-Indecomp project) articles I've had the pleasure of following.

After I mulled it over for a couple of days, I bought an Apple. It arrived last Wednesday afternoon. By Friday night we had it working through a kludged VIA. What happened in between is very much like the second episode

of a multipart serial TV drama, and just the sort of situation I'd been looking for to illustrate some basic troubleshooting principles.

When last we left this stirring tale... Some background is in order. The EDN staff developed and beautifully documented an I/O port using a 6820 PIA (peripheral interface adapter). It worked on a 6800 system and on a KIM, but not on Apple II. After some hair-raising adventures (including a fall down an elevator shaft by one of the staff), the villain was tracked down.

In the last scene, our heroes are provided with a potential solution to the basic problem. In the closing scene the *EDN* staff is left with several multiple-choice imponderables: Should they (a) redesign their "simple" interface to include a delay-producing (expensive) buffer, (b) give up on everything or (c) something in between?

The villain turned out to be a \emptyset 0 (phase zero) clock line masquerading as \emptyset 2, aided and abetted by the $\overline{\emptyset}$ 0 (inverted \emptyset 0) line passing itself off as \emptyset 1. The *real* \emptyset 2 never even got to the user bus as proclaimed.

As we resume our story, we find . . . The scene shifts to the Sunset Strip in glamorous Hollywood, where we pick up the action as an Apple II is being delivered to the Inmarco engineering department by a couple of Apple lovers. These gentlemen are convinced that the EDN article is a gross miscarriage of justice and that, even if there is something amiss, it can be easily remedied-not to worry. Billy Shatto (my partner in this adventure) had kludged a VIA using Vector Slit 'N Wrap so that we could easily change the design, and change it we did.

The well-documented *EDN* article provided some schematics and clues. Also helpful was that Apple was preceded by three earlier 6502 micros in my personal collection: Jolt, KIM and PET.

An Inventory of "Tools"

Inmarco has a resident Apple

freak named Dave Gordon. If you tear away his accounting-executive facade, you'll find the most turned-on Apple polisher that ever lived. If you read last month's column, you can recall that I feel one of the first steps in practical troubleshooting is to inventory your tools, or assets. I also had a lot to say about the "most valuable tool" being synergistic, synectic friendship of the type I referred to in the beginning of this month's column.

Dave is another excellent example of what I'm referring to. He'd be the first to admit that, technically, as an engineer or programmer, he's a great accountant, and this was certainly a technical troubleshooting problem. Even so, I'd rate Dave as the top asset we had at our disposal. We also had experience with interfacing I/O to 6502 microprocessors, since both the Jolt and KIM used PIAs, and the PET used VIAs. We had also interfaced an SWTP printer (PR-40) to both the PET and Dave's Apple, and then used his Apple to write the machinelanguage software to drive the PET's VIA (through the user plug) from BASIC. The most valuable experience had been with the Apple-printer interface because it used a 6520 PIA and 2708 PROM, both addressed with the bogus Ø2.

For the most part the printer worked, but the uneasy aspect of this experience was that it did not do all the things we expected it to do-more on that later. We didn't have the Hewlett-Packard #1615A logic analyzer (\$6800) that EDN used, but we did have a four-channel Tektronics #549 storage scope and a Paratronics analyzer (which we didn't have to use). We also had some logic probes, DVMs, etc. This inventory of assets seemed to warrant taking the risk, so here we were with an Apple.

And We're Off . . .

After unpacking the Apple II, we ran through a few routine checks with Dave's help. We decided we'd go for broke and try the VIA configuration as shown in Fig. 2. I was pretty sure that the problem could be solved by delaying the 60 (used as 62 in the Apple). Putting 60 through two stages of CMOS should delay it at least as much as the delay caused by the CPU (see Fig. 1) and gate

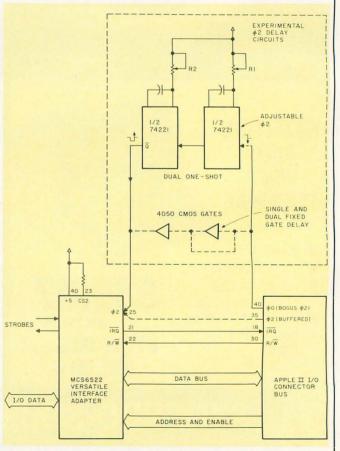


Fig. 1. Experimental versatile interface adapter for Apple II using various methods to provide delay for 02 input to pin 25 on the 6522. A buffered 02 from the CPU was distributed on unused bus #25 in the last analysis.

B11 (the latter wasn't mentioned in the *EDN* article).

Billy wrote a BASIC program to POKE in the VIA initialization data followed by a WRITE loop. Then he fixed it up. Nothing came out. Was *EDN* right? Had we goofed? (We had.)

Failures like this are a daily occurrence for Billy and me, but Dave was suffering real pain . . . something akin to an expectant father at delivery time. We juggled the software around and looked at some waveforms. The double CMOS gate delay was a lot longer than I had expected, so we cut it down to one-still no output. Then we substituted the PR-40 printer interface. It worked with its own PROM program, but when Billy tried it with the BASIC driver (suitably modified), nothing came out and the day was over.

We changed to the variable design of Fig. 2 so that we could adjust both the leading and trailing edges of an "adjustable" Ø2 coming out of the 74122, and Billy rewired it Thursday morning. By the time I arrived at work, he had discovered that the PIA could be initialized and driven by a machine-language program or from the Apple monitor, but not from a POKE command in BASIC. The scope showed two access pulses where we expected to see one. The first was coincident with the proper data pulse-the second wasn't. It was turning itself off about as fast as it was turning on!

We felt that the major problem was still the hardware, and it would be driven by machine language anyway, so Billy rewrote the test program in machine code,

and now the PIA worked! The EDN article quoted Steve Wozniak (the chief Apple grower) as saying that the 6502 had an odd habit of generating a READ before a WRITE during store operation. My experience with the Jolt and PET didn't jibe with that. I don't like loose ends like this floating around, but for the time being we decided to ignore BASIC and stick with machine code. (Days later, we found a bug in our program.)

Billy changed the program back to double-delayed \emptyset 0 VIA, and we tried to write with it. Success! We could move the critical edges back and forth by tweaking R1 and R2. When the rising edge of this "adjustable" \emptyset 2 was aligned with the \emptyset 0 (pin 40), the VIA would fail. When we moved it to coincide with the real \emptyset 2 on pin 39 of the 6502 or as much as 200 ns beyond that time, it worked! So much for "writing" out with the VIA.

Wozniak was also quoted as saying that the PIA was probably only useful as a write-out-to device. Our project called for read-after-write on a 9-track tape deck at 25 ips. That meant that we would have to both *read* and write, synchronize and index in less than 40 usec—could we do it with the Apple?

Our 6800 had been too slow. Billy rewrote the program to read and display in a high-speed loop. It worked! I was relieved, Billy was happy and Dave was ecstatic. His faith in his beloved Apple was vindicated. When we told him that it wasn't over yet and that we had *no* intention of putting adjustable pulses on every I/O board with a PIA or VIA, it

cooled him off a little, but he walked off into the sunset muttering something about "that being only a *little* problem."

A Can of Green Worms

In last month's column I said that the second step in troubleshooting was to define the problem and that the third step was to "fix" it. By now we felt we had the fundamental problem fairly well defined and turned our attention toward what to do about it. We knew that the real 02 coming from pin 39 on the 6502 was the correct phase and formed to do what the chip manufacturers (MOS Technology, Synertek and Rockwell) said it should do, so why not just use it instead of the Ø0?

Fourteen MHz works out to have around a 35 ns pulse width, and the Ø2 phase error was almost that much. Would replacing the Ø0 with a Ø2 for the whole system be the answer? If the feedback circuit didn't cause a race condition, we might just get away with it. We decided to try.

Billy cut the etch so that only the gate (B11) was driven from B1 (74S175 D flip-flop wired to toggle). The real Ø2 from pin 39 on the CPU was buffered by a TTL chip we installed on the kludge section of the Apple (a premeditated plus in the Apple design).

The result was a disaster. Attempts to trace the problem through the feedback loops produced a jumble of unintelligible green squiggles on the four-channel scope. We had opened a can of worms—green ones. We

quickly clapped the lid back on and restored the original 00 wiring . . . and sought a practical compromise.

Our past experience with memories, both static and dynamic, indicated that the phase error probably wouldn't bother them either way; so when it came right down to it, the only critical devices were most likely those on the interface bus. An examination showed that there were two unused lines (three if you count the user). One of them (pin 35) was adjacent to the other clock pulses, so Billy reconnected the original drive circuit and then ran a line from the real Ø2 down through the buffer (see Fig. 1) and back to pin 35 on the interface bus.

Now when we tried our VIA kludge (without a delay on board), it worked when driven from the "new 02" and failed when driven from the original line. This means that if we use VIAs, PIAs or the unbuffered PR-40 driver in our own designs, we will use the "new" real 02 line on pin 35. If we use a buffered design, such as the Apple PROM burner described in EDN, we can have a choice. Either line should work, but to play it safe I'd use the real (buffered) 02.

Later we tried the \emptyset 2 right out of the CPU (no buffer or buffer delay). If we routed the wire *exactly* right (and the moon was full), then it would work, but it needed the extra delay as a safety margin.

Will the Real Ø1 Please Stand Up!

So far we've been discussing the use, misuse and misnomering of Ø0 and Ø2 (see Fig. 3). What about Ø1? We did a lot of worrying about Ø1, probably unnecessarily. To start with, the waveform generated by our Apple 6502 Ø1 doesn't match the specifications shown in the MOS Technology book or the EDN article. Ø1 is supposed to be shorter than 02 on both ends. The leading edge was OK, but the trailing edge was coincident (as best we could read it on our scope), or maybe a few nanoseconds longer than 02.

On Friday afternoon after we got 02 straightened out, we checked the KIM and our just-arrived VIM 1, which used a Synertek 6502. The KIM looked just like the Apple, but the VIM 1 looked as the textbook said it should. With the exception of a clamp diode, the crystal clock circuits of the KIM and VIM are

book or the posed to both ends.

OK, but coincident it on our senanosecon
On Fridgot Ø2 senecked the arrived V Synertek Ø just like the looked as should. We clamp dioceuits of the solution o

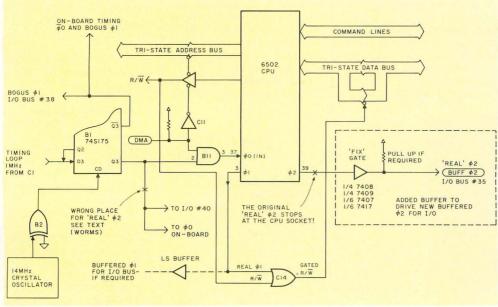


Fig. 2. Apple II clock circuitry showing "fix" buffer and waveform generation described in text.

(continued on page 116)

PRODUCTS

Software Package for COSMAC Micromonitor

RCA's Micromonitor Operating System (MOPS) CDP18S831 provides Micromonitor users with enhanced debugging techniques ranging from simple terminal Micromonitor dialog to hands-off system testing with commands coming from disk files. The MOPS software supplements the performance of the RCA COSMAC Micromonitor CDP18S030 by providing the user access to the processing and storage capabilities of the COS-MAC Development System (CDS) II CDP18S005 equipped with the Floppy Disk System CDP18S805. The Micromonitor, a self-contained debugging tool for use with any system based on the CDP1802 COSMAC microprocessor, permits in-circuit debugging in real time so that both hardware and software problems can be efficiently identified.

The package consists of a MOPS diskette plus a UART module and connecting cable to interface the Micromonitor to the CDS. MOPS provides an extended set of Micromonitor-type commands: (1) to conveniently switch Micromonitor commands and responses to and from a variety of system peripherals; (2) to more completely interrogate the CPU state; (3) for loading the system-under-test from a disk file; (4) for saving the systemunder-test memory, registers, etc., in disk file; (5) to facilitate automation in system debugging and testing.

In single quantities, MOPS is priced at \$350 and the Micromonitor at \$1600 (both U.S. only).

RCA Solid State Division, Box 3200, Somerville NJ 08876.

Manual for Apple II

Apple Computer, Inc., announces the availability of an easy-to-read, illustrated manual for its Apple II computer system. Entitled Apple II Basic Programming Manual, the book was authored by Jef Raskin, a computer professional who has written and lectured extensively on the subject of computer science to both the novice and the professional.

The book assumes no prior reader background in programming or computers. Programming is explained in everyday English with no computer jargon used. Moreover, the book introduces the whole computer to the reader. Thus, unlike programming manuals that solely teach a language, this book teaches a language in the context of the computer in which it will be executed.

Four chapters comprise the manual. Chapter 1 guides the reader through the details involved in connecting the various Apple II system elements, television, tape cassette player, etc., and describes the computer's control functions. The second chapter starts the reader programming with the BASIC Programming Language using simple, colorful examples. Chapter 3



The Tandy 10 system.

moves the reader into writing complete BASIC programs by providing detailed information on most BASIC language commands. Finally, the last chapter describes strings, arrays and subroutines for the reader who has acquired an understanding of the BASIC language and is ready to write more extensive programs.

The manual is presently available from Apple dealers for \$5.95.

Apple Computer, Inc., 10260 Bandley Dr., Cupertino CA 95014.

Tandy 10 Business System

The Tandy 10 system consists of a work station with diskette drives integrated into a compact metal desk and a separate matrix printer that prints 60 characters per second. Faster printers are available as options. The work station includes a video display, professional standard typewriter keyboard, 10-key calculator pad for numeric entry and 15 special function keys for data editing. With optional peripherals, it can be used as a terminal to access larger data systems.

Each diskette can hold up to 256,000 characters, providing a

total of more than ½ million characters on line. Internal memory capacity is 40,960 characters. Screen formatting language allows user prompting for data input. The Tandy 10 comes with extended BASIC. Fortran IV and Assembly Level program languages are also available as options.

The complete business computer system with work station, diskette drives and matrix printer is priced at \$9950. Tandy Computers, Department R22, PO Box 2932, Fort Worth TX 76101.

Software from ASI

Administrative Systems, Inc., 222 Milwaukee, Suite 102, Denver CO 80206, announces their latest software package for 8080 and Z-80 microcomputers. The S.O.S. (Single-user Operating System) package provides the user with a step between the OPUS stand-alone high-level languages and the TEMPOS Multi-User/Multi-Tasking Operating System.

Incorporating many of the features of TEMPOS, the S.O.S. package includes:

OPUS/THREE—the high-level Compiler/Interpreter from ASI; TEXTED—an easy-to-use, lineoriented text editor;

ASSEMBL—an 8080 assembler; FILES—a diskette file manipulator;

UTILITIES 1—a package of 12 utilities programs.

Full upward compatibility has been retained to allow the user of S.O.S. to access data and programs developed at lower levels; all may be used under the TEM-POS Operating System as well. All floppy disk and serial device I/O is handled by S.O.S.; a System Generation routine lets the



RCA's Micromonitor Operating System.



Apple II programming manual.







Automated Systems' Power Master system.

user define I/O drivers as required, or select from the standard drivers provided by ASI.

The recommended hardware configuration includes an 8080 or Z-80 processor, 32K of RAM memory, one or two floppy-disk drives and terminals as required. The system typically resides in less than 10K of RAM. The package is priced at \$385; the User's Manual Set may be purchased separately for \$20, which may be credited toward purchase of the S.O.S. package.

Acoustics Package for Centronics Printers

In response to the demand for a quiet, efficient line printer that will not interfere with the day-to-day operations within the office, Centronics Data Computer Corp. has introduced an optional acoustic package for use on all four members of its 6000 Series of high-quality, fully formed character line printers.

The factory-installed option consists of several distinct elements, each of which is designed to ensure quiet operation of the printer. The units, which will carry an end user price of \$450, are currently in production. Centronics, Hudson NH 03051.

SUPER-MONITOR for Poly

A new SUPER-MONITOR for PolyMorphic System 88 owners having trouble running software orged at 0000H due to the onboard system monitor is now available. It permits the use of low off-board RAM for program storage. The SUPER-MONITOR plugs into the two remaining ROM sockets on the Poly processor card and leaves the original monitor intact. The extended monitor contains many useful features that will give enhanced performance to the Poly 88, as well as free up low memory.

The SUPER-MONITOR features: DUMP, MOVE, VERIFY, EPROM PROGRAMMER, FILL, IN, OUT, CASSETTE SAVE, CASSETTE LOAD, SEARCH, SERIAL PORT DRIVER, GOTO, MEMORY MODIFY and RETURN TO POLY MONITOR. It is available as a two-chip set on 2708 EPROMs with complete documentation for only \$59, plus shipping.

Computer Hobbies Unlimited, 9215 Midlothian Turnpike, Richmond VA 23235.

Transient Voltage Suppressor Protects Circuitry

The HDA Power Master transient voltage suppressor dissipates destructive electrical transients produced by changing loads, switching SCR drive systems and operation of most electrical equipment.

Transients are a system problem resulting from variations fed back into the electrical network from operating equipment causing vibration, noise, excessive wear, heating in electric equipment and the waste of electrical energy. This system can significantly reduce these transients and protect delicate computer circuits and electronic systems.

Automated Systems, Inc., 5265 Port Royal Rd., Springfield VA 22151.

Graphic/Text Video Interface

MiniTerm Associates, Inc., Dundee Park, Andover MA 01810, has developed MERLIN, a combination text and graphic video display board that combines functions of text display, graphic display (320 H by 200 V resolution), keyboard input port and 4K bytes of on-board control ROM. Assembled and tested, the MERLIN video interface with 4K control firmware and superdense graphic option is priced under \$500. MERLIN is also available in kit form without ROM software for less than \$300.

The MERLIN video interface,


plus keyboard and video monitor, is a console I/O device for the small system (requires only mainframe, CPU and memory for a "total" system). MERLIN displays 20 lines of easily readable text with 40 characters per line. This is suitable for text editing, BASIC and assembly programs and large screen classroom use. Both upper and lowercase characters can be displayed. MERLIN is also a medium-resolution graphic display for graphic development and end-user systems. The standard resolution is 160 H by 100 V, true bit-mapped graphics. This can be increased to 320 H by 200 V (64,000 bits per screen) with the super-dense option.

The 4K control ROM firmware provides a keyboard driver with special "Edit key" decoding, display output with auto and "wrap-around" scrolling, 14 monitor functions, 25 cursor/edit functions plus graphic subroutines and a keyboard graphic drawing mode. The firmware can be tailored to your individual system with four user-definable monitor keys, seven edit keys and selectable I/O drivers.

The MERLIN video interface provides the main console I/O in a small system, or can be the heart of a sophisticated graphic development system. MERLIN is also economical and versatile enough for OEM graphic applications. In any application where there is a need for real time plotting, complex equation plotting, fine line drawing or pattern placement and/or movement (e.g., games), MERLIN can fill the job.

Word Processor for the PET

CONNECTICUT microCOM-PUTER announces a word pro-

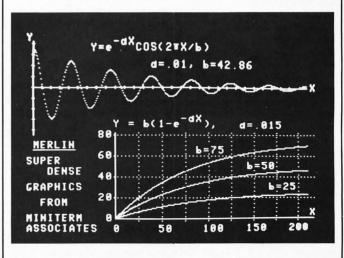

MERLIN's super-dense graphics display.



88/MS mass storage unit.

cessor program for the Commodore PET. This program permits composing and printing letters, flyers, advertisements, manuscripts, articles, etc., using the Commodore PET and an RS-232 printer.

Script directives include line length, left margin, centering and skip. Edit commands allow the user to insert lines, delete lines, move lines, change strings, save onto cassette, load from cassette, move up, move down, print and type. The Word Processor Program addresses an RS-232 printer through a CmC printer adapter. The program costs \$29.50 postpaid.

CONNECTICUT microCOM-PUTER, 150 Pocono Rd., Brookfield CT 06804.

Real Estate Management System

The MANAGER is a generalpurpose real estate property management package that will keep track of 500 tenants per diskette. It will store for immediate recall the following items on each tenant: rate of rent on unit; name and address of tenant; date and amount of last payment; current status of tenant (e.g., current, late, overdue, three-day notice); amount of last month rent held; amount of security deposit held.

The package has a daily utility program that generates tenant billing and overdue notices. The tenant data-base is automatically updated each day. A complete record is kept of funds in the owner's trust account. There are provisions for a year-to-date or month-to-date owner's trust-account report.

Other programs included with The MANAGER will print out a profit/loss statement for the owner, a report for the resident manager, and a fast report for you to use when answering owner

or tenant questions over the phone. The software is designed to run in 24K of memory using any combination of terminal and printer. The MANAGER comes complete on diskette in North Star BASIC and includes an extensive manual. \$199 shipped postpaid. California residents, add 6 percent sales tax.

Alpha Data Systems, Box 267, Santa Barbara CA 93102.

PolyMorphic's 88/MS

PolyMorphic Systems' 88/MS increases the storage capabilities of System 88 microcomputers through the use of disks that are not only larger than minifloppy disks, but will also store twice as much information per square inch and store it on both sides. One disk can hold 1.2 Mb—more than 500 pages of text.


The 88/MS consists of two drives for 8-inch magnetic storage disks in a walnut cabinet with brushed aluminum front panel.

A System 88 microcomputer with one or two 88/MS units will handle all the files and processing needs of most small businesses and professional offices. Present owners of any System 88 microcomputer can add the 88/MS mass storage unit with no changes in their equipment's operating system. Ready-to-use packages for doing such tasks as accounts receivable are available.

PolyMorphic Systems, Inc., 460 Ward Drive, Santa Barbara CA 93111.

New TB-2 Extender Board

The Mullen TB-2 Extender Board Kit retains the price of its predecessor but offers several new features. The built-in logic probe now reads out into a 7-seg-

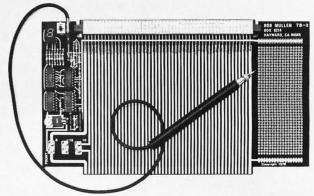

The Mullen TB-2 board.

ment display and also includes a pulse catcher plus an LED whose brightness corresponds to the duty cycle of a pulse stream. A general purpose "kluge board" section (with holes on 0.1 inch grid) aids development of circuits used in debugging or testing; an onboard 5 V @ 1 A regulator powers this section as well as the logic probe.

The TB-2 also incorporates features of the previous model, such as links in the power supply lines for current measurement/fusing/independent supply switching; an edge connector label that identifies power, ground and S-100 bus signal pins; full-width board size to allow use of card guides; and gold-plated edge-connector teeth that stand up to repeated insertions.

The Mullen Extender Board Kit lists for \$35 and is available at many computer stores or by direct mail from Mullen Computer Products, PO Box 6214, Hayward CA 94545.

Extended Monitor for KIM

"XIM" (Extended I/O Monitor) is a programming and debug-


ging package for the KIM-1 microcomputer. It provides commands to move, compare or search blocks of data for strings, set breakpoints, calculate hexadecimal branch displacements, load and print ASCII text, dump hex data on a terminal in 16 by 16 matrix form from memory and display processor registers.

"XIM" requires 1K of core at 2000 hex and is easily relocated to suit the user. It is also ROMable and easily modified, and features 17 commands, including four user-defined commands for expansion. The package includes a 45-page manual with source and object listings and a KIM-compatible cassette tape for \$12, postage paid USA and Canada.

Pyramid Data Systems, 6 Terrace Ave., New Egypt NJ 08533.

MicroPower Center For Energy Control

Energy Technology, Inc., developers of the Coby 1 System for remote control of electrical equipment, announces Micro-Power Center 168, a microcomputer for energy management in small-commercial or light-indus-

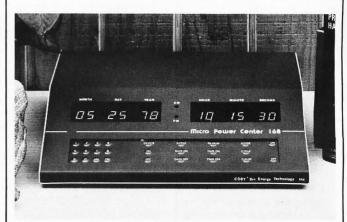

MicroPower Center 168 by Energy Technology.

HORIZON THE COMPLETE COMPUTER



Look To The North Star HORIZON Computer.

HORIZON™— a complete, high-performance microprocessor system with integrated floppy disk memory. HORIZON is attractive, professionally engineered, and ideal for business, educational and personal applications.

To begin programming in extended BASIC, merely add a CRT or hard-copy terminal. HORIZON-1 includes a Z80A processor, 16K RAM, minifloppy™ disk and 12-slot S-100 motherboard with serial terminal interface — all standard equipment.

WHAT ABOUT PERFORMANCE?

The Z80A processor operates at 4MHZ — double the power of the 8080. And our 16K RAM board lets the Z80A execute at full speed. HORIZON can load or save a 10K byte disk program in less than 2 seconds. Each diskette can store 90K bytes.

AND SOFTWARE, TOO

HORIZON includes the North Star Disk Operating System and full extended BASIC on diskette ready at power-on. Our BASIC, now in widespread use, has everything desired in a BASIC, including sequential and random disk files, formatted output, a powerful line editor, strings, machine language CALL and more.

EXPAND YOUR HORIZON

Also available—Hardware floating point board (FPB); additional 16K memory boards with parity option. Add a second disk drive and you have HORIZON-2. Economical serial and parallel I/O ports may be installed on the motherboard. Many widely available S-100 bus peripheral boards can be added to HORIZON.

QUALITY AT THE RIGHT PRICE

HORIZON processor board, RAM, FPB and MICRO DISK SYSTEM can be bought separately for either Z80 or 8080 S-100 bus systems.

HORIZON-1 \$1599 kit; \$1899 assembled. HORIZON-2 \$1999 kit; \$2349 assembled.


16K RAM—\$399 kit; \$459 assembled; Parity option \$39 kit; \$59 assembled. FPB \$259 kit; \$359 assembled. Z80 board \$199 kit; \$259 assembled. Prices subject to change. HORIZON offered in choice of wood or blue metal cover at no extra charge.

Write for free color catalogue or visit your local computer store.

NORTH STAR

COMPUTERS,

2547 Ninth Street • Berkeley, California 94710 • (415) 549-0858

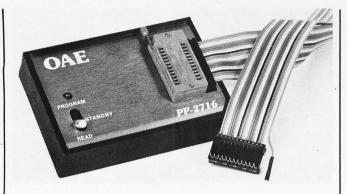

OAE's PP-2716.

trial businesses.

MicroPower Center 168 (the 168 signifies the total number of hours in a week and its ability to set up 7-day cycles, or repeat patterns) can automatically turn the current on or off at designated locations around a business. This user-programmable electrical load controller can be used, for instance, to turn the lights or any other equipment off at a preset time each night or at different times on different nights.

The user can decide in advance when he wants any device enabled (supplied with power). The MPC 168 can handle on-off signals to as many as 100 locations around a small business. A 12-hour battery backup system will keep the Center functioning in the event of a temporary power outage.

The MicroPower Center uses the four varieties of Coby remotes to supply or withhold electrical energy from wall switches, wall plugs or to installed wiring (24-volt or 220-volt). The typical MicroPower Center 168 installation in a small business would run between \$5000-6000. Deliveries begin in August 1978.

Energy Technology, Inc., 204 Conway (PO Box Q), Las Cruces NM 88001.

PP-2716 PROM Programmer

Oliver Advanced Engineering, Inc., announces the PP-2716 for the unique single-supply Intel 2716 EPROM. A 5 foot flat ribbon cable connects this full-feature programmer to *any* read only PROM socket via a 24-pin plug. With OAE's PROM socket interface, data is sent over the eight lower address lines to the programmer. No additional power supplies are required, and all timing and control sequences are handled by the programmer.

Each programmer comes complete with an internal DC-to-DC switching regulator and zero in-

sertion force socket. The unit is packaged in a handsome anodized aluminum case for tabletop operation. Each unit comes completely assembled, tested, aligned and ready for use. Simply plug the unit into any read only socket and go! Price is \$295.


Oliver Advanced Engineering, Inc., 676 West Wilson Ave., Glendale CA 91203.

Retail prices on the OP-80A Paper Tape Reader have increased from \$74.50 to \$84.50 kit, \$99.95 assembled and tested.

Vector Electronic 8804 Board

Vector Electronic's Model 8804 board, bus and shape compatible with Altair and Imsai microcomputer boards, holds up to seventy 14- or 16-pin DIPs or any combination of DIP sockets with 0.3, 0.4, 0.6 or 0.9 inch lead spacing. Designed as the "ANY DIP" Plugbord, the 5.3 inch by 10 inch by 0.062 inch board has 100 (50 each side) card-edge contacts on 0.125 inch centers to accommodate an S-100 bus organization. Two 100-hole rows of individual 0.1 inch spaced pads across the top of the board permit additional input/output via ribbon-wire assemblies. Inexpensive wrap posts may be fabricated by inserting Vector's T46-5-9 wrapped-wire pins into the holes.

For wiring convenience, power and ground buses are in an offset ladder pattern on opposite board sides. One corner of the 8804 may be used for a low-profile heat sink with two regulators in the TO-220 packages. The leads of one regulator position are prewired to power input, ground and regulated power. The other regulator position is uncommitted. The circuit boards have complete marking for easy component and lead designation. DIP zone coordinates are marked along the board edges, while lead designations are

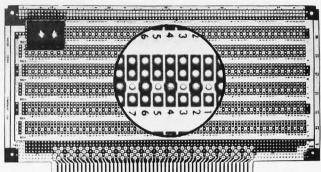

VE's ANY DIP Plugbord.

etched into the power and ground buses.

8804 Plugbords are priced at \$21.95 each in quantities of one to four; \$19.76 each in quantities from five to 24; and \$17.56 in quantities over 25.

Vector Electronic Company, 12460 Gladstone Ave., Sylmar CA 91342.

Wire-Wrapping Kit

Model WK-5B is a unique new wire-wrapping kit that contains a complete range of tools and parts for prototype and hobby applications, all conveniently packaged in a handy, durable plastic carrying case.

The kit includes Model BW-630 battery wire-wrapping tool complete with bit and sleeve; Model WSU-30, a remarkable new hand wire-wrapping/un-wrapping/stripping tool; a universal PC board; an edge connector with wire-wrapping terminals; a set of PC card guides and brackets; a mini-shear with safety clip; industrial quality 14-, 16-, 24- and 40-pin DIP sockets; an assortment of wire-wrapping terminals; a DIP inserter; a DIP extractor and a unique three-


color wire dispenser complete with 50 feet each of red, white and blue Kynar insulated, silverplated solid AWG 30 copper wire.

Priced at \$74.95, the WK-5B wire-wrapping kit is available from your local electronics distributor or directly from OK Machine and Tool Corporation, 3455 Conner Street, Bronx NY 10475.

Free Heath Brochure

Heath Company has recently issued a free computer facts brochure entitled "Why You Should Consider A 16-Bit Microcomputer." The 8-page brochure has information for those personal computerists who are undecided over the choice of an 8-bit or a 16-bit computer. The advantages of the 16-bit computer are discussed at length, as are the limitations of the 8-bit computer. Also covered are important topics such as computing power, software, service, support, reputation, quality and reliability.

Included also in the brochure is an introduction to the H11 Computer, Heath's 16-bit machine that utilizes the Digital Equipment Corporation LSI-11 CPU.

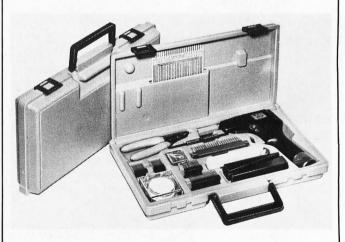

WK-5B kit.

The H11 is available both in kit form and as a completely wired and tested unit that is fully compatible with most DEC accessories and peripherals.

For a free copy of the new computer facts brochure, write Heath Company, Dept. 350-650, Benton Harbor MI 49022.

Foreign Language Programs

Musgrove Engineering announces the first of their Foreign Language Series educational programs, Foreign Language Vocabulary, a bidirectional program for the instruction, practice and testing of language-vocabulary skills. Languages offered include French, Spanish, Italian and German.

Program features include separate modes for vocabulary instruction, practice drills and testing, selectable by the user at any time during program operation. The user may also alternate language direction (English-to-French or French-to-English) to improve comprehension. The Educator option permits the creation of files for the storage of stu-

dent identification, test responses and test scores for use in a classroom situation.


Foreign Language Vocabulary is written in BASIC for ease of adaptation to all microcomputer systems. Each volume includes an annotated program listing and program flowchart to assure ease of user loading and understanding. Single-statement lines are used to avoid confusion and to permit ease of user modification.

Each volume of Foreign Language Vocabulary is priced at \$5, with the Educator option costing an additional \$3. All four volumes are \$17.50, \$27.50 with the Educator option. Quantity discounts are available.

Musgrove Engineering, 9547 Kindletree Dr., Houston TX 77040.

Terrapin Turtle

The TerrapinTM Turtle, a small electronic robot controllable by microprocessor, can "walk" (roll), touch (with its 3½-inch radius hemishperical dome) and draw (lowering its pen attachment) as programmed. It has

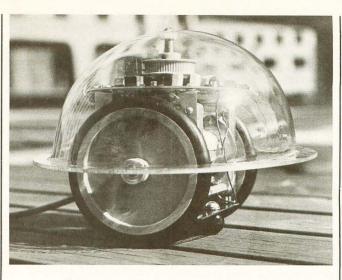

Terrapin's computerized Turtle.

lights for eyes and a speaker to emit sounds. The Turtle requires a parallel interface (one compatible with an S-100 bus is available as an accessory). Each Turtle comes with ten feet of cable and may be purchased either as a kit or fully assembled. Each kit comes with a tested, 20-page instruction manual.

The Turtle can be used to map rooms, solve mazes, teach simple

geometry or programming concepts, as well as many other tasks. The Turtle is 5 inches high, crawls at 6 inches per second and is extremely versatile due to its touch sensors. Brochures are available. Kit \$300; assembled \$500; interface \$40.

For further information contact: David McClees, Terrapin, Inc., 33 Edinborough St., Sixth floor, Boston MA 02111.



Thanks

When I was growing up I was taught to say "Thank you" whenever someone helped me in some way. This is a "Thank you" to you folks at Kilobaud.

For the past year, while I have been stationed with the Navy in the Philippines, I have been trying to learn about this new hobby of microcomputers. Your philosophy of keeping everything in plain, nontechnical English has been of great help, especially since I have no computer background and no one available locally to answer my questions.

I have read and reread every issue trying to learn as much as I could, and when that didn't work, I wrote letters to you at Kilobaud and to authors of several of the articles, making sure I enclosed a SASE each time. Each

time I received a reply that was friendly, informative and encouraging. Judging by the responses I received, there is no danger of the people who have the experience already forgetting what it is like to be a beginner full of questions. To all those authors who answered my letters, I extend a warm "Thank you" also.

Some people deserve personal recognition. Assistant Editor Jeff DeTray took time out from his duties to write personal letters that cleared up some problems I was having at the time. And the l-o-n-g letter I received from author Ed Juge went a long way towards convincing me the TRS-80 is the one for me. Thanks, Ed.

The only complaint I have is not against the *Kilobaud* staff or the authors but against some of the advertisers. I sent five or six of the reader-service cards re-

questing information from about 25 companies. I received six replies. I also sent three personal letters to as many companies and received *no* replies. I did my best to keep track of which companies answered and which didn't, and plan to schedule any future buying plans accordingly.

I returned to the U.S. in July, to Kingsville TX, and can now pursue this exciting hobby at long last. And I hope I won't have to write so many letters.

So thanks again to everyone on the *Kilobaud* staff, and to Wayne Green for putting it all together so well.

> Dan Lane Kingsville TX

Cautionary Note on Batteries

I wish to comment on the article "Protect Your Memory" by Charles R. Carpenter in the March 1978 issue. I realize he was presenting only one possible solution to the "memory loss through power failure" problem, but the article does contain information that may be misleading and could possibly create a hazardous situation.

Mr. Carpenter states, "trickle charge the battery to keep it at maximum potential," but trickle charging storage batteries is recommended only for nickel-cadmium batteries. Both lead-acid and alkaline storage batteries require constant voltage sources for maintaining charge in standby service. Severe shortening of service life can result from the use of trickle chargers on both lead-acid and alkaline batteries.

Furthermore, if left on too high, lead-acid batteries present a potential hazard of trickle charge due to the generation of explosive gases and the possibility of corrosion or burns from escaping acid. Charging any storage battery and maintaining it in standby service requires that specific currents and/or voltages be applied, depending on the type and the capacity of the battery.

Perhaps you should warn your readers to not apply just any old voltage or any old current to the battery they may be using for memory save. Instead, they should follow the recommendations of the battery manufacturer regarding charging requirements for standby service. This is especially true if the battery is of the lead-acid (automotive) type. I know of instances when lead-acid

batteries have exploded while being charged, and in one case after the battery was off the charger for several hours. True, a spark or flame was present in each case to ignite the gases, but how many computerists smoke! I don't think that any computerist wants sulfuric acid splashed on himself, or on his computer, so a word of caution seems in order.

J. D. Martin Pasco WA

Large Number of Comments on "Little Bits"

Your readers should be alerted to a serious flaw in the flowchart on page 69 of the July issue in the short piece by William Colsher titled "Develop Your Own Square Root Routine." The last step in the loop is given as:

LET R = 1/2(R/N + R)

It should read:

LET R = 1/2(N/R + R)

In addition to this error, which prevents the algorithm from giving the correct answer, values of N greater than 1,E16 will cause an overflow in many systems due to the test of R*R against N when R = N/2. There are further objections from the standpoint of efficiency and accuracy.

Curtis F. Gerald San Luis Obispo CA

In addition to this letter from Curtis, we received five other letters, from Joe Ponder and R. L. Turner, Seattle WA; Allen Watson, Redwood City CA; Gordon Tillman, USS Tecumseh; and George Hill, Chevy Chase MD, all indicating they thought the algorighm was faulty.—Editors.

In reading "Little Bits" (Kilobaud, July 1978) I see a short article from Jack Starr regarding the need to improvise (?) when using SWTPC 8K BASIC. While the technique shown will work it should be noted that Example I will also work. These statements

any of those that cannot support the set of statements shown in the example.

The reason a problem (?) like this occurs at all is due to the ever increasing trend toward the implementation of interpreters that subvert widely used and understood BASIC syntax.

Joseph J. O'Loughlin III Huron OH

Nearly the same response came from Ron Anderson, "an avid 6800 user" from Ann Arbor MI. —Editors.

Explanations, Please

It would seem to be time for an explanation of the aims, purposes and results of the Kilobaud Laboratory. This is prompted by Wayne's recent comments that "we've never managed to acquire a working 6800-based system" (Kilobaud Newsletter, 5/12/78. Similar remark in Publisher's Remarks, Kilobaud No. 18). The ads indicate that there are a number of companies manufacturing 6800-based systems, most of which have been around awhile. Our local computer club has had three different 6800 systems demonstrated, all of which worked. Two of our local stores sell 6800-based systems, and they report no great number of customer complaints; in fact, they say the biggest number of complaints has to do with getting delivery on accessories and expansion items, so the customers must like the 6800-based systems. So do us all a favor and tell us what your problems are.

I also refer to "Publisher's Remarks," No. 19: "A Need for Standards." It might possibly be advantageous to have a "standard bus," but is it really necessary? Most of the different bus designs available today seem to try to take maximum advantage of the processor signals available, and the devices available to interface with it. At least

102 IF Z<>13 THEN IF Z<32 THEN B1 = 1:GOTO 340 130 IF Z = 82 THEN IF Z = 1 THEN GOTO 180

Example 1.

have the added virtue of closely resembling the form and function of the original statements. I regularly deal with 6 different implementations of BASIC on a regular basis and am not aware of we are told that this is the reason Mits chose to use two unidirectional data buses even though the 8080 used a bidirectional data bus. Mention is often made of the "de-facto standard" nature of the Mits bus due to the number of boards available for it. This makes one wonder how many of these boards are available with supporting software that runs on a non-8080/Z-80 CPU, and how many could interface through a serial or parallel port rather than on the bus. A large number of the "S-100" bus boards are memory boards; is there really a problem getting memory boards for any bus structure?

How about a new column on "the ideal bus"; let your readers state their opinions on how it should be designed, and what features it should have. Since I am not a hardware type, my biggest question has to do with the technical aspects of on-board regulators vs large regulated power distribution on the bus.

R. S. Downs Raleigh NC

As of this date we just haven't been able to arrive at an arrangement to obtain a 6800-based system. It hasn't been for lack of trying or interest, though. The laboratory itself is being used primarily to test programs for prerecorded cassettes . . . and eventually to teach uninitiated staffers how to program, and about buses, etc. Maybe you don't think a standard bus is necessary, R. S., but it sure would reduce the frustration level for many of us (see "Compatibility and the Altair Bus," Kilobaud No. 19, page 100).—Editors.

Due Credit

I noticed in the June 1978 issue ("ASCII to Baudot . . . ," p. 80) a circuit that looked familiar. Sure enough, after reading that it was first published in the March 1976 issue of Radio-Electronics, I realized that it was mine! I wonder why Maury Goldberg told me back in 1976 that he couldn't use my circuit. Could it have been to avoid the tiny royalty?

Had Mr. Lehman or Mr. Graham purchased the *original* kit from SWTP (at \$24.50, not \$35), they would have received a perfectly plated board, *all* parts and an offer from me to program the EPROMs as well as assist in any technical problems. I still provide this service, as anyone who provides a SASE can testify.

Incidentally, the circuit (as well as the Baudot to ASCII converter in the April 1976 issue of *Radio-Electronics*) has worked very well for the great number of those getting the original. The 7400 series

ICs were chosen instead of UARTs, etc., to hold the cost of the kit below \$25. I have seen more exotic converters and some with fewer ICs, but none below \$24.50.

As for MMM, perhaps what they saved in royalties and technical help they lost in goodwill and sales. I guess all I can ask for now is due credit for the circuit.

Roger L. Smith Mesa AZ

TRS-80: Query and Critique

I have recently become interested in microcomputer systems. I am basically a hobbyist and game player, but would also like a system to do home financial routines and other similar home functions.

I have considered several different systems starting from the 4K, Level I TRS-80, all the way to a built-up system costing upwards of \$2000, and I have also written small programs for the Apple II.

I have settled on the 16K TRS-80; however, I do not wish to invest an additional \$200 for the CRT. Is there any information available to aid me in the construction of an interface for the TRS-80 with an ordinary b & w television? Are there any serious disadvantages to doing this?

As I stated, I am mainly a game player. I am looking for a chess routine (simple 1, 2 or 3 moves ahead) to fit in the 16K memory of the TRS-80, written in BASIC.

Sanford A. Meyersfield, M.D. Great Neck NY

It's rather surprising that no one has developed a TRS-80 interface to a regular television. (The Radio Shack has an opto-isolator built in so more than a simple TV modulator is required.) Maybe a reader can come up with something. Using T-BUG you could probably enter the 8080 version of Micro-Ware Ltd.'s Microchess (see Kilobaud No. 20, p. 74. . . if they provide source listings-we think they do), cost of which is \$18. Micro-Ware, 27 Firstbrook Rd., Toronto, Ontario Canada M4E 2L2.—Editors.

Wayne Green's remark on p. 7 of the June 1978 Kilobaud—"the recent blast in PCC at the TRS-80 is a mystery. . . . "—is itself a mystery. The TRS-80 has a great many shortcomings; some of the uglier ones are:

• The cassette recorder operates at a slower speed than most simi-

lar equipment. The recorder (to I put it charitably) is awkward to

• The Level I BASIC is slow and

primitive. The keyboard has no rollover.

The PCC article dealt at some length with these and other deficiencies. Neither Wayne nor Radio Shack (whose response to the criticism was printed in the same issue of PCC) addressed these substantive issues.

I think Kilobaud has an obligation to its readers to print the straight scoop about the drawbacks of equipment, especially that being offered to beginners. Reading Wayne's remarks in the June Kilobaud, one gets the impression that the TRS-80 and the PET are machines of equivalent quality and performance; this simply isn't so.

> **Dave Caulkins** Los Altos CA

Since I've had no problems using the TRS-80 recorder and letters from readers have been remarkably quiet about this, it is difficult to accept it as a notable problem. That Level II is a lot faster should still further complaints. I assume that just about everyone will be upgrading their systems to Level II.

Although Level I BASIC is slow, it is a darned good 4K BASIC, and it seems unfair to me to compare it with Level II or anything else other than Tiny BASICs, in which case it comes out well.

Rather than looking for things to criticize, I tend to look for the good aspects of equipment, making note of any serious shortcomings only. In the case of the TRS-80, there is no question that owners are wildly enthusiastic about it and tend to get upset over unfair criticisms. - Wayne

Another Dimension of "3-D Tic-Tac-Toe"

I really enjoyed the April article on 3-D Tic-Tac-Toe (page 66). However, when I programmed it on my machine, the computer took over eight minutes to make its first move. That was not acceptable, so I did some analysis of the algorithm and discovered a way to increase the speed of the computer moves.

The version of your article first calculates the value of each of the 76 possible winning combinations. It next proceeds to evaluate the value of a move in each empty box of the 64 possible boxes. The program does this for each box by searching the entire list of 76 winning combinations to see if that box is in each winning combination. If so, it adds the value of that combination to the sum for that box.

This procedure searches each of the four positions of the 76 winning combinations for each open box. This is an excessive amount (304 searches per box) considering that most boxes (48) are in only four winning combinations. The remaining 16 boxes (the eight outer corners and eight innermost boxes) are in seven.

My machine, Radio Shack TRS-80, Level I BASIC, took over eight minutes to calculate the first move under the author's design and under 75 seconds with my proposals.

The author's scheme of awarding points for various values of a possible winning combination (Table 1) is too conservative. Consider the following move:

| Player | Computer |
|--------|----------|
| 1,4 | 1,1 |
| 1,13 | 1,7 |
| 2,4 | 4,4 |
| 2,13 | 4,13 |
| 2,11 | 2,7 |
| 4.1 | |

The author's scheme will now move at 2,9, a value of 6. A move to 4,7 sets up two moves of 3 in a row 1,7 2,7 --, 4,7 and 4,4 4,7 --, 4.13. This move (4.7) has only a value of 4 under the author's weight scheme.

I propose the following modification to the points awarded for winning combinations (author's Table 1) (only changes are shown):

| Value | Points Awarded |
|-------|----------------|
| . 2 | 104 |
| 10 | 12 |

The rationale for this scheme is that we are searching for a move, such as 4,7 above, which places a third move for the player in two winning combinations where that player already has two moves. The result is the points for a box needed to ignore the tens digit if between 10 and 19 and the hundreds digit if between 100 and 199. This is summarized as:

if
$$10 \le V \le 19$$
 then $V = V - 10$
if $100 \le V \le 199$ then $V = V - 100$

Of course the computer must first block a player's chance to set up two combinations with three entries. That is the reason for the extreme weight of 100. With this proposed algorithm, box 2,9 has a value of 6 (106 reduced to 6), while box 4,7 has a value of 24.

The second modification consists of adding a small value (I chose .1) to all boxes of a winning combination with no moves in it. The purpose of this is to aid tie breaking. Given equal blocking and scoring power, it is better to move to the box that contributes to the most unused combinations. The following game shows this:

| Player | Computer |
|-----------|----------|
| 1,1 | 1,2* |
| 1,6 | 1,11 |
| 2,6 | 3,11 |
| 2,11 | 3,6 |
| 3,5 | 3,9 |
| 1,5 | 1,9 |
| 2,5 | 4,5 |
| 3,7 | 4,8 |
| 2,7 | 2,8 |
| 1,7 | 4,7 |
| 1,8: wins | |
| | |

The computer's first move (1,2) is a strategical error. All moves that block the seven winning combinations involved with 1,1 produce the same value. The computer assigns the value of 1 to box 1,2 first and discards ties after that. Consequently, a move is selected that blocks one of the player's chances of winning, but only provides 3 chances for the computer to win. This is not as good as 1,4; 1,13; 1,16; 4,1; 4,4; 4,13; 4,16; 2,6 or 3,11, which also block the player's move but open six winning chances for the computer. With this change the computer moves to 2,6.

In summary, I enjoyed the author's article, but think that the above changes will run faster and make the computer do even better, as if it needs any help.

> Robert E. Heath, II Woodbridge VA

Congratulations

There seemed to be a number of requests for reader feedback in the June 1978 issue, and I thought I would reply.

The "Tour of the Faire (Part 1)," with its many pictures of the people behind the products, was well worth the space devoted to it. Since much of microcomputer purchasing is still a mail-order business, this type of article provides a vital psychological link to the people involved in the many companies advertising in Kilobaud.

Speaking of advertising, I don't think I am alone in that the first thing I read when I get my copy of Kilobaud is the advertising. I don't find the ads an intrusion but a service. I am educating myself with both the articles and the advertising, and when I purchase microcomputer supplies they are chosen from among the regular Kilobaud advertisers.

Congratulations for publishing

the consumer report on Mini Micro Mart as well as the information on Norman Henry Hunt. Both articles indicate a concern for your readers that goes beyond customary publishing practice. I tried to return the favor in a small way by mentioning Kilobaud in a recent order to one of your advertisers.

> Tom Vollmer Honolulu HI

Unregal Royalties?

I would like to make a few remarks about the Publisher's Remarks (June 1978). Although there are several software distributors, it would be good for Kilobaud to enter the field. However, the example given shows the ridiculousness of giving the programmer a flat 20 percent royalty, since although he would get \$859,680, Kilobaud would get \$3,438,720. I would not want to buy a program written by anybody stupid enough to fall for that. Twenty percent is a reasonable royalty for inexpensive programs where there is not much profit for the distributor, but it is unreasonable for more expensive packages.

It was surprising to learn of the large number of systems that Kilobaud has. Why haven't you given us some articles comparing them? Many writers seem to have had no experience with systems other than their own and so it is hard to tell if their expectations have anything to do with reality. You seem to be very well equipped to write some excellent product reviews.

I have also gotten tired of hearing Wayne Green bad-mouth Byte. I know that he feels that he has had a raw deal, but why take it out on us? Like most of the other readers of Kilobaud I prefer it to Byte so he is talking to the wrong audience.

Please don't think that I have anything against Wayne Green. His remarks are always entertaining and sometimes very enlightening. I would just like to ask him to ease off on his comments about the competition.

Ralph Johnson Galesburg IL

In the example, Kilobaud would gross \$3,438,720, but then there are: start-up costs (which on a relatively large scale are considerable), promotion, packaging, labor (it takes quite a few people quite a bit of time to get the cassettes into final form) . . . and, finally, taxes to consider. Furthermore, how many programwriters have access to the equipment and personnel to produce, promote and market their own software (on a relatively large scale)? We have a number of systems, and comparison articles is a good idea. Everyone here is very busy (although staffer Steve Lionel did find time to write a fine review of the Heath H11, p. 52)—maybe if someone could stop by . . .—Editors.

Evolutions

I was delighted to see my article "Memory Troubleshooting Techniques" (Kilobaud, October 1977) followed up by Rod Hallen's excellent article in the July 1978 issue of Kilobaud (page 70). Mr. Hallen has presented a relatively painless implementation of my flowchart. In that article he mentioned that he artificially introduced some shorts and opens in order to simulate faults. Some readers may think that such faults may rarely occur. It has been my experience that such faults are fairly common with homemade printed circuit

| PROM | Pin 20,21 CE | Collec Resistors | Int Bit Pattern | Mfg. | Comment |
|------------|--------------------|---------------------|--------------------|-----------|------------------|
| 82S140/141 | 0,0 | - 10K | 0 | Signetics | Program units in |
| 82S180/181 | 0,0 | 10K | 0 | | 256 byte jumps |
| 82S2708 | 0,0 | 10K | 0 | | |
| 82S190/191 | 0,X | 10K | 0 | | Address pin 21 |
| 7641-5 | 1 | 560Ω | 1 | Harris | |
| 7681-5 | 1 | 560Ω | 1 | | |
| | | | | TI | N.A. |

boards. While most people buy their processor and memory boards, there are still a lot of homemade PC boards out there used with computers in one way or another.

In my original article I made a few comments about these PC board problems and as a result I have had numerous inquiries about how to make defect-free prototype boards. In fact, just that brief mention of PC boards in general brought responses that indicated that people fairly knowledgeable in electronics were in desperate need for someone to make boards for them. To make a long story short, that article led me in a totally unexpected direction: the prototype printed circuit business. As expected, most customers are computer enthusiasts.

Thank you Kilobaud.

Charles E. Cook Refugio TX

Tom's PROM

I have had one inquiry about the PROM Programmer by Tom Hayek (No. 19, page 94) concerning programming other PROMs. A cursory look indicates that the circuit and board will work for a number of other PROMs.

I have listed them in a table to show what changes have to be made. The Harris PROM requires a high on pins 20 and 21, while the 82S series requires a low; this is all programmable. The intial bit pattern (INBP) is low

It will even work with an 82S 190 and 82S 191 with pin 21 brought out for addressing (2048 x 8).

Perhaps there might be some people who can use this information.

> Ozzie Stafford Greensboro NC

A "Best Buy"

I recently purchased the "Black Box" printer advertised by Expandor Incorporated, 400 Sainte Claire Plaza, Upper St. Claire PA 15146. The 80-column impact printer is available with a parallel interface and controller at \$396. It mates perfectly with the parallel I/O card in the Heath H8 computer. Ten minutes to wire a 30-pin plug is all it takes to be up and running.

Delivery time from Expandor was approximately four months. However, at \$396 the wait was worth it. This must be rated a "best buy."

Laird D. Schearer Boulder CO

KB GLUB GALENDAR

Steve Fuller

Arlington MA

A free newsletter is available to TRS-80 users from the TRS-80 Club, 96 Dothan St., Arlington MA 02174. A software library is also available for reproduction cost.

Belvidere IL

Here's an update from the Blackhawk Bit Burners Computer Club: According to club president Frank Dougherty, the Bit Burners now have 40 active members from the Rockford area.

If you'd like more information, write to the club at 325 Beacon Drive, Belvidere IL, or call (815) 544-5206 evenings.

Lynn Haven FL

Don Palmer of the Panama City Computer Society would like some assistance in organizing his new club. He asks if there is a

standard charter that would be compatible with some existing clubs, and is also interested in any national affiliation to which his club may apply. If you can help, or would like to join the club, write to Don at 815 Ky Ave., Lynn Haven FL 32444.

Philipsburg PA

PROGRAM, a club for PET owners, has been formed to address the need for programs and consumer/hobbyist education. For an annual fee of \$27 members receive a monthly cassette containing PET-related articles, applications, hardware sources, reviews of new peripherals and programming hints. Also included are several games, and a variety of household and business programs.

Write to PROGRAM, PO Box 461, Philipsburg PA 16866.

Sacramento CA

TRS-80 owners in the Sacramento area are invited to call Sal Alestra at (916) 927-0237 for information concerning a new users group.

Chicago IL

William Colsher sends word of a new Digital Group organization in Chicago.

"The Digital Group Group of Chicago was formed to provide a forum for the exchange of ideas, software, fixes, etc., by owners of Digital Group computer systems.

"We meet on the last Tuesday of each month in the meeting room of Consumer Systems, 2107 Swift Road, Oak Brook IL. Meetings are held at 7:30 PM.

"Annual membership dues of \$5 are used to help defray the costs of producing the club newsletter and monthly meeting notifications. The newsletter is currently running about 4 to 6 pages and contains news of club activities, Digital Group compatible hardware and software, as well as articles and reviews by club members."

For more information write The Digital Group Group of Chicago, c/o William L. Colsher, 4328 Nutmeg Lane, Apt. 111, Lisle IL 60532, or call club president Rich Kurtz at 852-5772.

Rome NY

Rome Area Computer Enthusiasts (RACE) was recently formed here for computerists in the Rome-Utica area of central New York.

The club meets on the second Tuesday of each month at Patty's Stagecoach Inn at 7:30 PM. Special interest groups have been formed for beginners and for owners of 6800 and 8080/Z-80 microprocessors. A newsletter, *Micros Along the Mohawk*, is a regular publication of the club. Interested hobbyists can write to Mike Troutman, RD 1, W. Carter Road, Rome NY 13440, or call him at (315) 336-0986.

This column is available for you to report on your club's activities such as regular meeting schedules, special events or programs, swap meets or any endeavor that will be of interest to your fellow hobbyists. If your announcement contains timely information, send it at least two months prior to the date(s) mentioned in the announcement.

Kilobaud Club Calendar c/o Steve Fuller 334 Sterling St. Unit A-3 West Boylston MA 01583

BOOKS BOOKS

(from page 8)

program which will do the same job that would otherwise require all those integrated circuits. The program is not a particularly efficient one, however, and we learn how to clean it up in the next section, reducing it to 105 lines. It should be noted that the line count of 105 includes a considerable number of explanatory comments. If the comments were deleted, the program would be quite a bit shorter, but nearly impossible for anyone unfamiliar with it to decipher at a later time. A third chapter is devoted to streamlining the program even further.

The book concludes with an examination of the Z-80 instruction set and a look at some commonly used subroutines.

While you shouldn't throw away your soldering iron or wire wrap tool just yet, the techniques explained in this book could be used to perform some jobs now done with hardware. If your bag is "doing it with software," you ought to take a look at Z-80 Programming for Logic Design.

Jeff DeTray Kilobaud Staff

Microprocessor Interfacing Techniques, Second Edition Austin Lesea, Rodnay Zaks Sybex, Inc. Berkeley CA, 1978

Microprocessor Interfacing Techniques provides a highly readable compilation of basic interfacing techniques and standards that must be understood before any wires are connected to a computer. The book provides both general and specific information for interfacing a micro to anything from a keyboard to a floppy disk. Also covered are parallel standards such as the IEEE 488 bus and the S-100 bus along with some clever insights on why standards are standards. Serial standards such as the RS-232 C and the various synchronous data link controller (SDLC) schemes are introduced.

Before designing any interface, the designer should at least know of the existence of these standards and realize that it isn't necessary to start from scratch

when designing an interface. The major advantage to be gained by understanding the interface standards is that the final system may be signal and plug compatible with other systems.

Another area given considerable coverage is that of analog interface. Almost all naturally occurring signals are analog in nature, consequently any control or monitoring functions to be performed by a microprocessor will require some amount of analog interface. The authors of this book have provided all the background information needed to design a data acquisition system such as sampling, multiplexing, analog to digital conversion and digital to analog conversion. As microprocessors are increasingly turned to real-world problems, analog interfacing techniques become more important.

Microprocessor Interfacing Techniques contains a considerable amount of useful information in a form that is easy to read and understand. This book should be read by anyone who is in the preliminary stages of interface design and does not have a lot of preconceived ideas about what the interface will be like. Although interface standards can sometimes be unwieldy, there are a lot of good reasons for using standard interfacing techniques.

David G. Herold Athens OH

D UBLISHER'S REMARKS

(from page 7)

Home Work, Too

My plan for producing software is to first have an editor check each submitted program for completeness, good documentation, non-conflict with other programs in production or published, sale possibilities, etc. If the program passes this preliminary hurdle we will have a person who makes up ten copies of the program and the documentation and sends these out to ten associate editors for thorough review. This job will mean the editor will have to have an appropriate system at home and the background to do a good evaluation of the program. We'll expect a complete critique of the program plus suggestions for changes, improvements, variables that users might want to change, suggestions for customization of the program, etc. This work will be paid on a per-hour basis . . . starting at \$3 per hour. This is low for in-house work, but for work done at home at the convenience of the editor-and for work that is hardly work-I suspect we'll have a good choice of associate editors. Is this something you could do well and would be fun for play-work in your spare time? This is a chance to get in on the ground floor of an exciting new industry.

If you'd like to get a tryout as an associate editor of our software, drop a line to Wayne Green, *Kilobaud*, Peterborough NH 03458, and give me your background, hardware, etc. We'll be needing editors with TRS-80 4K, 8K and 8K Level 2 systems . . . plus PET owners . . . and most of the other type of systems. Considering the number of TRS-80 systems extant, we'll be needing TRS-80 editors in goodly numbers.

Extra Carrot

Yes, \$3 per hour is a pittance for top-notch programmers. They should get ten times that, no doubt. In order to equalize this pay a bit and make the project more attractive to programmers . . . and to encourage first-rate work . . . we will be setting aside an extra 2 percent royalty on sales and splitting this with the associate editors who contribute the most toward the success of a program.

This means that an editor who might be splitting this 2 percent with one other editor would do quite well on a sale of 50,000 of

the program. At a retail price of \$7.95 for the program and a wholesale gross of \$4.293, this would bring each of the two editors \$2146.50 in royalties. You won't buy too big a yacht with that, but you can buy one hell of a rowboat . . . maybe even an outboard.

I am hoping that high pay for programs and for editing will result in a large quantity of first-rate programs . . . and that this will result in the spread of microcomputing into every corner of the world.

What type of programs? Just about anything . . . games are always popular, of course, but as the well-known games are all published there will be a need for the development of new games, and we may find them selling even better for computer use than do the board games. There is a need for hundreds of business programs . . . home programs . . . educational programs . . . medical . . . the list is really endless.

Submitting Programs

As the number of programs submitted grows, so will the requirements for perfection and detail. If you have a program that you think might be worth publication on cassette and that you think might sell in quantities of 50,000 or more over the next year or so, you really should get it into as good shape as you can and submit it to us for possible publication.

The royalties are substantial and should keep you going for several weeks, at least. The royalty is 20 percent of the wholesale

(continued on page 118)

Reader Responsibility

One of your responsibilities, as a reader of *Kilobaud*, is to aid and abet the increasing of circulation and advertising, both of which will bring you the same benefit: a larger and even better magazine. You can help by encouraging your friends to subscribe to *Kilobaud*. Remember that subscriptions are guaranteed—money back if not delighted, so no one can lose. You can also help by tearing out one of the cards just inside the back cover and circling the replies you'd like to see: catalogs, spec sheets, etc. Advertisers put a lot of trust in these reader requests for information. To make it even more worth your while to send in the card, a drawing will be held each month and the winner will get a lifetime subscription to *Kilobaud*!

George Tucker of Janesville WI is the most recent winner of a lifetime subscription to *Kilobaud*.

(Con)text Editor

Here's something different—a text editor in BASIC. It's a full-fledged editor; you'll like it.

R. M. Law D. C. Mitchell 5521 Woodward Downers Grove IL 60515

Imost everyone uses some Akind of editing to create and debug new software. Whether the task consists of merely deleting and inserting lines in BASIC, or whether it encompasses writing letters and forms for business, a good context editor is handy.

This article presents a context editor which incorporates many of the features found on large computer systems. Furthermore, it is written in BASIC rather than assembly language, which makes it machine independent and easier to understand and modify. The drawback of writing an editor in a high-level language, of course, is its slow speed. Thus, our main program-design criterion was to reduce as much pro-

cessing time as possible. The result represents a useful trade-off among editing features, speed and memory requirements.

In our home, the editor receives constant use for record keeping, letter writing, recipe collecting, record and tape cataloging, name and address file updating and retrieving, daily calendar and message reminding and countless other applications where information is stored in text form. The editor was also used to prepare this article for publication. We hope you will find it a useful addition to your program library.

The Editor: Makeup and Use

The entire editor occupies 16K of memory including Mits 8K BASIC Version 4.0. It is designed to hold one entire page of text at a time-a page is defined as 60 lines of 72 characters (this can be easily adjusted to other values). The editor can load, edit and store these pages. Besides text, each line is paired with a line number that allows the user to reference desired lines. Fig. 1 shows the complete command repertoire of the editor

A context editor differs from a text editor in that it allows the user to change the contents of a line, or a range of lines, by typing only the text to be changed and the replacement text. It can also locate text occurrences

anywhere in the data set without having to be told the line where the text resides.

The editor commands themselves offer a great deal of freedom in how the user enters them, and what options are present. All commands can be abbreviated, and many parameters are optional. For example, to delete lines 3 through 5 in the data set, the user could enter any of the following:

DELETE 3-5 D(3,5)D3/5 **DEL 03 05 DELETE 3.0:5.0**

The context editor will try to make sense out of many individual styles of users. The general rules of syntax for each command are in the Editor Command Guide. In addition to these commands, there are several main concepts with which to become familiar.

Line Numbers. If you have not used an editor with line numbers, you will appreciate the time-savings gained in locating or referencing items in the data set. In addition, line numbers provide for fewer errors in deleting and moving, since you always know exactly where you are steering the com-

The context editor permits fractional line numbers. Thus, the user can specify an increment that is to be added to the

BOTTOM Move the current-line pointer to the last line of the data set. CHANGE Change text on a line or a range of lines. Delete one or more lines from the data set. DELETE **EXCERPT** Duplicate a specified number of lines at somewhere else in the data set.

Find the first occurrence of specified text. FIND INSERT Insert new lines into the data set.

KILL Delete the entire data set. LOAD Get a data set from tape.

MOVE Move a specified number of lines to somewhere else in the data set.

Move the current-line pointer forward or back-**NEXT** ward a specified number of lines.

Delete one or more lines and insert new lines in

OVERLAY their place.

Print a line or a range of lines with their corre-PRINT sponding line numbers.

Exit the context editor.

RENUMBER Reorganize the data set sequentially by integer

Put the current editor data set on tape.

SAVE Move the current-line pointer to the first line of TOP

Print the entire data set in its final form without WRITE

line numbers.

XRAY Used for debugging.

Fig. 1. Editor commands.

QUIT

line number of the previous line to produce the current line number. This increment is initially set to 1, but can be changed in the INSERT, MOVE, OVERLAY and EXCERPT commands to be anywhere from .0001 to 10,000.

Before inserting a new line, the editor verifies that the new line number is not greater or equal to the line number of the following line. If it is greater or equal, an error message will occur, indicating that you are trying to insert or move on top of existing lines.

The context editor also freely permits the use of nonexistent lines numbers—a feature that few others offer. For example, if you enter DELETE 4-6, it is not necessary that lines 4 and 6 actually exist. The editor will lock onto any lines that do exist in that range and delete them.

Similarly, you can INSERT 3 even though line 3 doesn't physically exist, and the editor will begin numbering your new lines as if the line were there. In fact, the only time the editor won't let you operate on phantom lines is if the entire range you specify is nonexistent (at which time the operation is meaningless).

Although perhaps not obvious, this feature can save you a lot of work in certain types of situations, especially when you want to renumber or resequence only a portion of the data set.

Line numbers are limited to the floating-point precision offered by your BASIC interpreter; for Mits BASIC Version 4.0, this is six digits. Thus, line numbers such as 10000.1 and .987654 are legal, but numbers such as 10000.12 and 1.987654 will be truncated by BASIC when you attempt to use them.

Current Line. The context editor maintains a current-line concept for convenience. The current line is usually always the last line processed by the previous command. If you don't specify the line numbers in a command, the editor will assume you want to process the current line.

For example, if you type only DELETE, the editor will delete

CONTEXT EDITOR VERSION 5.0

```
User is creating a new data set.
?INSERT
>?THIS IS LINE A
STHIS IS LINE B
>?THIS IS LINE C
>?THIS IS LINE D
>?
                               User defaults to leave insert mode.
     THIS IS LINE D
                               System prints current line.
                               User wants to print lines 1-4.
?PRINT 1-4
     THIS IS LINE A
     THIS IS LINE B
     THIS IS LINE C
     THIS IS LINE D
                               User wants to insert between lires 2 & 3.
?INSERT 2 BY .1
>?THIS IS LINE E
>?THIS IS LINE F
                               User defaults to leave insert mode.
2.2 THIS IS LINE F
                               System prints current line
                               User wants to see entire data set.
?PRINT ALL
     THIS IS LINE A
    THIS IS LINE B
THIS IS LINE E
2.1
2.2
     THIS IS LINE F
3
     THIS IS LINE C
     THIS IS LINE D
                               Delete the current line.
SDEL ETE
                               System backs up to previous line
     THIS IS LINE C
                               and makes it current.
                               User backs up one line.
?NEXT -1
     THIS IS LINE F
                               User wants to change text.
?CHANGE/LINE F/LINE H/
2.2
     THIS IS LINE H
?TOF
                               User wants top of data set.
     THIS IS LINE A
                               System prints current line.
?FIND/LINE E/
                               User wants to find text.
     THIS IS LINE E
                               System prints current line.
C/LINE E/LINE G/
                               User wants to change text.
System prints current line.
2-1
     THIS IS LINE G
                               User wants to see entire data set.
P ALI
     THIS IS LINE A
     THIS IS LINE B
     THIS IS LINE G
     THIS IS LINE H
     THIS IS LINE C
?EXCERPT 1 2 3 BY .01
                               User wants to duplicate lines 182 after 3.
3.02 THIS IS LINE B
                               System prints current line.
?NFXT - 1
                               User backs up one line.
3.01 THIS IS LINE A
                               System prints current line.
?N -1
                               User backs up one line
                               System prints current line
     THIS IS LINE C
?P ALL
1 THIS IS LINE A
                               User wants to see entire data set.
     THIS IS LINE G
    THIS IS LINE H
     THIS IS LINE C
3.01 THIS IS LINE A
3.02 THIS IS LINE B
POVERIAY 2
                               User wants to replace line 2.
>?THIS IS LINE X
>?THIS IS LINE Y
>?THIS IS LINE Z
                               User defaults to leave insert mode.
1.03 THIS IS LINE Z
                               System prints current line
?P AII
                               User wants to see entire data set.
     THIS IS LINE A
1.C1 THIS IS LINE X
1.02 THIS IS LINE Y
1.03 THIS IS LINE Z
2.1
     THIS IS LINE G
2.2
    THIS IS LINE H
     THIS IS LINE C
3.01 THIS IS LINE A
3.02 THIS IS LINE B
?RENUMBER
                               User wants to renumber data set.
     THIS IS LINE A
                               System prints current line.
?P ALL
                               User wants to see entire data set.
     THIS IS LINE A
     THIS IS LINE X
     THIS IS LINE Z
THIS IS LINE G
5
     THIS IS LINE H
     THIS IS LINE C
8
     THIS IS LINE A
9
     THIS IS LINE B
SKILL
                               User wants to delete entire data set.
DO YOU REALLY WANT TO KILL THE DATA SET (Y/N) ? Y
?P ALL
                               User wants to see entire data set.
THE DATA SET IS, EMPTY
?OUIT
                               User wants to leave editor.
NORMAL END
```

Fig. 2. Sample run.

воттом

Locate and print the last line of the data set. The bottom line will become the current line. BOTTOM followed by INSERT will insert new lines at the end of the data set.

Change the first occurrence of TEXT1 to TEXT2. If line numbers A and B are not specified then change TEXT1 on the current line. If only line number A is specified then only line A will be changed. If line numbers A and B are specified then the first occurrence of TEXT1 on each line in the range A to B will be changed. If optional parameter ALL is specified, all occurrences of TEXT1 on the current line or range of lines will be changed. Only the new current line will be printed. Optional parameter PRALL is the same as parameter ALL except all occurrences of TEXT1 will be printed. TEXT1 and TEXT2 must be surrounded by delimiter symbols (shown above as *) which can be any nonalphanumeric character, except, of course, those appearing in TEXT1 or TEXT2.

DELETE <A< B>>

Delete one or more lines from a data set. If line numbers A and B are not specified, the current line will be deleted. If only line number A is specified, only line A will be deleted. If line numbers A and B are specified, the range of lines A through B will be deleted; the current-line pointer will move to the line above the deleted range. If the first line of the data set is deleted, the current-line pointer will move beyond the deleted range.

EXCERPT <A< B>> C< BY N>

Duplicate line A or lines A through B to after line C. The original line A or range of lines A through B remain unchanged. If line numbers A and B are not specified, then the current line will be duplicated after line C. The increment amount for line numbers inserted after C can be changed with the BY N option.

FIND <A< B>>*TEXT1*< PRALL>

Find the first occurrence of TEXT1. If line numbers A and B are not specified, then FIND will begin with the current line and search until it locates TEXT1 or until the bottom of the data set is reached. If only line number A is specified, only line A will be searched. If line numbers A and B are specified then the range of lines A through B will be searched for the first occurrence of TEXT1. FIND will stop and print at each occurrence of TEXT1. To find the next occurrence, merely hit RETURN. The editor will continue searching until it finds the next occurrence. You can repeat this as many times as you wish. If optional parameter PRALL is specified, all occur-

the current line. Similarly, IN-SERT, without any line numbers specified, will insert immediately after the current line. This feature allows you to enter shorthand commands for frequently used operations.

If you are ever unsure of the current line, just type PRINT. However, the editor will ensure that the current line is always the previous line printed, and will generate automatic print calls wherever it is not obvious what line is current.

Delimiters. Delimiters are nonalphanumeric characters

used to surround text in CHANGE and FIND commands. The user must choose characters that are not present in the text itself.

For example, if the user had the line THIS IS A SAMPL LINE, he could correct it to THIS IS A SAMPLE LINE by the command:

CHANGE/PL LINE/PLE LINE/ (SLASHES AS DELIMITERS)

but not by:

CHANGE PL LINE PLE LINE (BLANKS AS DELIMITERS) since blanks are part of the text. However, he could perrences of TEXT1 on the current line or range of lines will be found and printed. TEXT1 must be surrounded by delimiter symbols (shown above as *) which can be any nonalphanumeric character, except, of course, those appearing in TEXT1.

INSERT <A>< BY N>

Insert after line A, or after the current line if A is not specified. If A is 0 then insert above the first line of the data set. The editor keeps prompting for new lines of text. To leave the insert mode, enter a null line. The increment value for insertion can be set with the BY N option. The current line becomes the last line inserted.

KILL

Destroy the existing data set and restart the editor. This is useful after you have saved your data set on tape and wish to begin creating a new one.

LOAD

Load a data set from tape. LOAD does an automatic KILL. To begin loading, advance tape to where the page was saved and type LOAD.

MOVE <A< B>> C< BY N>

Move line A or lines A through B to after line C. The original line A or range of lines A through B is deleted. If line numbers A and B are not specified, then the current line will be moved to after C. The increment amount for line numbers inserted after C can be changed with the BY N option.

Move the current-line pointer + forward or - backward N number of lines. If N is not specified, the default is N = 1. The current-line pointer will be moved to the line following the current line. If + N exceeds the bottom of the data set the current-line pointer will be set to the last line of the data set. If - N exceeds the top of the data set, the current-line pointer will be set to the first line of the data set. In each case the new current line will be printed

OVERLAY <A< B>>< BY N>

Delete one or more lines and enter insert mode. If line numbers A and B are not specified, the current line will be deleted and insert mode entered. If only line number A is specified, only line A is deleted and insert mode is entered. If line numbers A and B are specified, the range of lines A through B is deleted and the insert mode is entered. Insert mode is terminated by a null line. The last line inserted becomes the current line. The increment value for insertion can be set with the BY N option.

form the same correction by: CHANGE PL PLE (BLANKS AS DELIMITERS) since the blanks are not part of the text in this example.

Fig. 2 illustrates these principles through a sample run.

At the heart of the data set is a group of four matrices shown in Fig. 3. For every line I of text, there is an associated text entry L\$(I), a line number L(I), a forward link to the next successive line number F(I) and a backward pointer to the previous line number B(I). Asso-

ciated with these four matrices are two unique pointers; USED and UNUSED.

The used pointer points to the first (lowest) line number in the data set; the unused pointer points to the first vacant slot in the matrix, or the next place to put a newly inserted line. Thus, if USED=0, the data set is empty; if UNUSED=0, the data set is full. A zero entry in the F or B matrix indicates the end of a forward or backward chain, respectively.

Fig. 3 shows how the matrices are initially set up for a new

PRINT <A< B>>< ALL>

Print a set of lines, along with their line numbers. If line numbers A and B are not specified, then print the current line. If only line number A is specified, then line A will be printed. If line numbers A and B are specified, the range of lines A through B will be printed. If optional parameter ALL is specified, the entire data set is printed. The last line printed becomes the current line.

QUIT

Leave the context editor and return to basic command mode.

RENUMBER

Reorganize the data set sequentially by integer line numbers.

SAVE

Save the data set on tape. Start tape before you hit RETURN.

TOF

Locate and print the first line of the data set. The top line will become the current line. TOP followed by INSERT will insert new lines following the first line of the data set. INSERT 0 will insert new lines above the top of the data set.

WRITE

Same as PRINT except the line numbers are not printed. The

WRITE command prints the entire data set, and is generally used to output the final form of a letter, document, etc.

XRAY

Console tool used to display all internal links and pointers associated with the data set.

| UNUSE USED: | | | INITIAL DATA SFT |
|----------------|-----|-----|------------------|
| I() | F() | B() | L() |
| 1 | 2 | 0 | 0 |
| 2 | 3 | 1 | 9 |
| 3 | 4 | 2 | 0 |
| 4 | 5 | 3 | 0 |
| 5 | ó | 4 | 0 |
| 6 | 7 | 5 | O . |
| 7 | 8 | 6 | 0 |
| 8 | 9 | 7 | 0 |
| 9 | 10 | 8 | 0 |
| 10 | 0 | 9 | C |

Program listing.

```
1 CLEAR3750:I=0:J=0:K=0:P=0:C=0:B=0:F=0:E=0:U=0:UN=1:S=0:E=0:M=0:L=0:N=0
  Q=60:DIMF(Q),B(Q),L(Q),L$(Q)
 B$=" ": A$="A": Z$="Z": X$="Ø": Y$="9": D$=".": C$="DIPCFONTBFMEWLSKQX"
 PRINTCHR$(26) "CONTEXT EDITOR"TAB(50) "VERSION 5.0": PRINT: PPINT: PPINT
6 POKE2507, 34: POKE2509, 34
10 FORI=1TOQ: F(I)=I+1:B(I)=I-1:L(I)=0:L$(I)="":NEXT:F(Q)=0
1 1 U=0:UN=1:M=0:BY=1
25 L=L(M):P=1:I$=B$:INPUTI$:GOSUB1000:IFR<0THEN40
26 TS=LEFTS(TS, 1): FOFO=1T018: IFMIDS(CS, 0, 1) <> TSTHENNEXT: GOT0200
30 ONOGOTO50,100,150,200,250,300,350,400,450,500,550,600,650,700,750,800
31 ONO-16G0T0850,900
40 IFO=5THENB=0:GOTO235
41 GOT02000
50 S=L:E=L:GOSUB1000:IFR=2THENGOSUB1000:IFR>0THEN2001
5 | IFR=0THENS=VAL(T$):E=S:GOSUB1000:IFF=2THENGOSUB1000
52 IFR=0THENE=VAL(T$):GOSUB1000:IFE<STHEN2004
53 IFT$="BY"THENGOSUB1000:BY=VAL(T$):GOTO55
54 IFR=00RF=1THEN2001
55 IFBY<1E-40RBY>1E4THEN2004
60 B=0:F=0:C=U:IFC=0THEN2006
61 IFC> ØANDL(C) < STHENC=F(C): GOTO61
62 IFC>ØANDL(C) <= ETHENB=C
63 IFC>@ANDL(C) <= ETHENF=C:L(C) = 0:C=F(C):G0T063
70 IFB=GANDF=GTHEN2GG2
71 M=B(B): IFU=BTHENU=F(F): B(U)=0: GOTO 73
72 F(B(B))=F(F):B(F(F))=B(B)
73 F(F)=UN:B(UN)=F:UN=B:M=B(B)
90 IFM=0THENM=U
91 IF0=1THEN2100
92 I=S-BY: GOTO110
100 I=L: GOSUB1000: IFR> 1THEN2001
101 IFR=0THENI=VAL(T$): GOSUB1000
102 IFT$="BY"THENGOSUB1000:BY=VAL(T$):GOT0104
103 IFR>=0THEN2001
104 IFBY<1E-40RBY>1E4THEN2004
110 B=0:F=U:J=I+BY
111 IFF> ØANDL(F) < JTHENB=F: F=F(F): GOTO111
120 I=VAL(STR$(I+BY)):C=UN:IFO<>12THEN124
121 IFR=ØORL(R)>ETHEN2100
122 IS=LS(R):R=F(R):GOT0125
124 IS="": INPUT">"; IS: IFIS=""THEN2100
125 IFUN=ØTHEN2ØØ3
126 UN=F(C): IFF>ØANDI>=L(F)THEN2ØØ5
127 IFB=ØTHENU=C: GOTO129
128 F(B)=C:B(C)=B
129 F(C)=F:B(F)=C:B(UN)=Ø:L(C)=I:L$(C)=I$:M=C
13Ø B=C: GOTO12Ø
150 S=L:E=L
151 IFU=@THEN2006
152 GOSUBIØØØ:IFT$="ALL"THENS=Ø:E=1E5:GOTO16Ø
153 IFR>0THEN2001
154 IFR=@THENS=VAL(T$):E=S:GOSUB1@@@:IFR=2THENGOSUB1@@@:IFR>@THEN2@@1
155 IFR=@THENE=VAL(T$):1FE<STHEN2004
160 C=U:J=0
161 IFC> ØANDL(C) < STHENC=F(C): GOTO161
170 IFC=00RL(C)>ETHEN180
172 J=1:PRINTL(C)TAB(10)L$(C):M=C:C=F(C):GOTO170
180 IFJ=0THEN2002
182 GOT025
200 F=0:C=0:B=0:J=LEN(IS):R=J:I=0:IF0=5THENB=J
201 TS=MIDS(IS,J, 1): IFTS<ASORTS>ZSTHEN207
```

data set; note that there are no entries on the used chain, and the unused chain fills the entire data set. Only ten entries are shown in the figure. In the actual code, there are 60 entries, one for each line of a standard Teletype page.

INSERT. Fig. 4 illustrates the algorithm employed for inserting a new record into the data set. First, a check is made to see if there is any free space in the editor buffer. If there are no vacant lines, then UNUSED = 0, and an error message that the editor buffer is full is forwarded to the user. If space is available, a new line is reserved for the new record by seizing the first free record on the unused chain [C = UNUSED] and by decreasing the size of the unused chain by one line [UNUSED = F(C)].

Now that the physical space exists for the new record, we must locate where the new line should be linked in order of its line number. That is, we must eventually arrange the used chain so that it is numerically ascending by line number.

Of course, one way to do this is to apply a sort routine to the entire data set to sort it lowest to highest line number. However, even with the very best sort routine, it is very slow compared to leaving the lines randomly placed but linking pointers to sequentially link the data

```
202 TS=MID$(I$,J,1):IFT$>=A$ANDT$<=Z$THENJ=J-1:IFJ>0THEN202
2 03 I FJ = 0THEN 2001
204 T$=RIGHT$(I$, R-J):IFT$="PRALL"THENI=2:GOTO207
205 I=1:1FT$<>"ALL"THEN2001
207 TS=MID$(I$,J,1):IFT$>=X$ANDT$<=Y$THEN2001
208 IFMIDS(IS, J, 1)=TSTHENF=C:C=B:B=J:IFF>0THEN210
209 J=J-1:IFJ>0THEN208
210 S=L:E=L:IFJ=00RF=0THEN2001
212 S$=MID$(I$,B+1,C-B-1):IF0=5THENE$=S$:E=1E5:GOT0214
213 E$=MID$(I$,C+1,F-C-1)
214 R=9: IFP < BTHENGOSUBIØØØ: IFR > ØTHEN2ØØ1
215 IFR=0THENS=VAL(T$):E=S:IFP<BTHENGOSUB1000
216 IFP<BANDR=2THENGOSUB1000:IFR>1THEN2001
217 IFR=@THENE=UAL(TS)
218 IFP<>BTHEN2001
220 B=0:C=U:IFC=0THEN2006
221 IFC> ØANDL(C) < STHENC=F(C): GOTO221
222 P=1:1FC=00RL(C)>ETHEN240
223 IS=L$(C):M=C:T$=S$: GOSUB1100:F=P:IFR>0THEN235
224 B=1:L$(C)=MID$(I$,1,P-K-1)+E$:IFI=@THEN23@
225 F=P: GOSUB1100:1FR>0THEN230
226 L$(C)=L$(C)+MID$(I$,F,P-F-K)+E$
227 IFI > ØTHEN225
229 IF0=5THEN2100
23@ LS(C)=LS(C)+MIDS(IS,F,LEN(IS)-F+1)
231 IF0=5THEN2100
232 IFI=2THENPRINTL(C)TAB(10)L$(C)
235 C=F(C): GOT0222
240 0=0:1FB=0THEN2007
241 IFI<2THEN2100
242 GOT025
250 GOTO200
300 GOTO50
350 IFU=0THEN2006
351 I=1: GOSUB1000: K=1: IFR < 0THEN 355
352 IFT$="-"THENI =- 1
353 GOSUB1000:1FR<>0THEN2001
354 K=VAL(T$)
355 J=M:IFI<0THEN370
360 IFJ=0THENPRINT"BOTTOM OF DATA SET REACHED": GOTO2100
361 IFK=ØTHEN21ØØ
362 J=F(J):K=K-1:IFJ>@THENM=J
363 GOT0360
370 IFJ=0THENPRINT"TOP OF DATA SET REACHED": GOTO2100
371 IFK=@THEN21@@
372 J=B(J): K=K-1: IFJ> ØTHENM=J
373 GOT037Ø
400 IFU=0THEN2006
401 M=U: GOTO2100
450 F=U:1FU=0THEN2006
451 IFF(F)>ØTHENF=F(F): GOTO451
452 M=F: GOTO2100
500 J=U:K=1:M=U
501 IFJ=0THEN2100
502 L(J)=K:K=K+1:J=F(J):G0T0501
550 S=L:GOSUB1000:IFR<>0THEN2001
551 I=VAL(T$):GOSUBIØØØ:IFR=2THENGOSUBIØØØ
553 IFR=@THENS=I:I=VAL(T$):GOSUB1000:IFR=2THENGOSUB1000:IFR=2THEN2001
555 E=S:IFR=@THENE=I:I=VAL(T$):GOSUB1@00:IFR>1THEN2001
556 IFT$<>"BY"THEN559
557 GOSUB1000: IFR<> 0THEN2001
558 BY=VAL(T$): IFBY<1E-40RBY>1E4THEN2004
559 K=0: I FE < STHEN 2004
560 J=I:C=0:B=0:F=0:R=U
561 IFR=ØTHEN2006
562 IFL(R) <= JTHENC=R
563 IFL(R) < STHENR=F(R): GOTO561
564 IFL(R) <= ETHENB=R
565 IFR=@THEN570
566 IFL(R)<=JTHENC=R
567 IFL(R) <= ETHENK=K+1: F=R: R=F(R): GOTO 565
568 IFR> ØANDL (R) <= JTHENC=R: R=F(R): GOTO568
570 IFB=0THEN2002
5 71 IF0=12THENR=B:K=1:GOT0110
572 R=F(C):IFC=ØTHENR=U
573 IFR=BTHENR=F(F)
574 M=F:IFR>ØANDL(R)<=I+K*BYTHEN2005
575 R=B
576 I=VAL(STR$(I+BY)):L(R)=I:IFR<>FTHENR=F(R):GOTO576
580 IFB(B)=CORF=CTHEN590
582 IFU=BTHENU=F(F)
583 IFF(C)>ØTHENB(F(C))=B
584 IFF(F)>ØTHENB(F(F))=B(B)
585 IFB(B)>ØTHENF(B(B))=F(F)
586 B(B)=C:IFC>ØTHENF(F)=F(C):F(C)=B:G0T0590
587 F(F)=U:B(U)=F:U=B
590 GOTO2100
600 GOTO550
650 C=U:IFU=@THEN2006
651 FORI=1TOQ: IFC> ØTHENPRINTL$(C): C=F(C): GOTO 653
652 PRINT
653 NEXT: GOTO25
700 REM
710 CLOAD*L: CLOAD*F: FORI=ITON: T$=""
711 WAIT6, 1, 1:K=INP(7):IFK<255THENTS=TS+CHRS(K):GOTO711
712 L$(I)=T$:NEXT:U=L(@):UN=F(@):M=U
720 FORI=1TON:B(F(I))=I:NEXT:B(U)=0:B(UN)=0:F(0)=0:B(0)=0:L(0)=0:G0T0.25
750 REM
760 1.(0)=U:CSAVE*L:F(0)=UN:CSAVE*F:FORI=ITON:.I=LEN(1.5(1)):IF.I=0THEN780
```

set according to line numbers. To aid in this latter method, two pointers, B and F, are set up to point to the backward line and forward line, respectively, relative to the line number being inserted.

The example in Fig. 5 will help make this process clear. In this example, the data set is initially empty; we are going to insert a single new line with line number 1. The numbers to the left of the slashes in the examples are the original values prior to inserting; the numbers to the right of the slashes are the new values after the IN-SERT command is executed. Thus, initially the data set appears empty, exactly as in Fig. 3 with no lines in the used chain, and with the unused chain beginning at slot 1 and completely filling up all ten slots of the data set.

After the insert operation, the used chain has a single entry starting at slot 1, and the unused chain has nine entries starting at slot 2 and ending at slot 10. Remember that a zero in the F or B matrix terminates a forward or backward pointer chain, respectively. Also, recall that each of the F and B columns actually contains two chains, one consisting of used entries and one consisting of unused entries.

Finally, and most important, the entire operation of the IN-SERT command is portrayed by the appearance of slashes in the example—all of these operations are nothing more than pointer changes, and the relatively high speed of these operations, even though written in a high-level language, enables the editor to respond quickly.

In order to actually perform the pointer changes shown in the example, the INSERT command code must first locate the lines where the pointer changes are to take place. There are three variables, B, F and C, which appear at the bottom of each example, and are set up to point to these key lines (don't confuse the single variables B and F with the matrix variables B() and F()).

As shown in Fig. 5, C points to the current slot, or the slot

Radio Shack's personal computer <u>system?</u> This ad just might make you a believer.

You can't beat the 4K system at \$599



TRS-80 "Breakthru"

- TRS-80 microcomputer
- 12" video display
- · Professional keyboard
- Power supply
- · Cassette tape recorder
- 4K RAM, Level-I BASIC
- 232-page manual
- · 2 game cassettes

... or the step-up 16K system at \$899



TRS-80 "Sweet 16"

 Above, except includes 16K RAM

... or the fast 4K/printer system at \$1198



TRS-80 "Educator"

 Above, except includes 4K RAM and screen printer

... or the Level-II 16K/printer/disk system at \$2385



TRS-80 "Professional"

 Above, except includes 16K RAM, disk drive, expansion interface, and Level-II BASIC

So how are you gonna beat the system that does this much for this little? No way!

...The amazing new 32K/Level-II/2-disk/ line printer system at \$3874



TRS-80 "Business"

 Above, except includes 32K RAM, line printer, and two disk drives

Get details and order now at Radio Shack stores and dealers in the USA, Canada, UK, Australia, Belgium, Holland, France, Japan. Write Radio Shack, Division of Tandy Corporation, Dept. C-046/B, 1400 One Tandy Center, Fort Worth, Texas 76102. Ask for Catalog TRS-80.

Radio Shaek

R17

The biggest name in little computers [®]

```
770 FORK=ITOJ: F=ASC(MIDS(LS(I),K,1))
771 WAIT6, 128, 128
772 OUT 7, R: FORP= ITO5: NEXTP, K
780 WAIT6, 128, 128
781 OUT7, 255: NEXTI: GOT025
800 INPUT"** DO YOU REALLY WANT TO KILL THE DATA SET (Y/N)"; IS
8 01 IFLEFTS(IS, 1) = "Y"THENPRINTCHRS(26): GOTO10
8 02 GOTO25
850 REM
851 POKE2507,58: POKE2509,44
852 PRINT"NORMAL END": END
900 PRINT"NORMAL END":END
900 PRINT"UNUSED ="U" USED ="U" B ="B" F ="F" C =
901 PRINT" I"," F"," B"," L"
902 PRINT:FORI=ITOPW:PRINTI,F(I),B(I),L(I):NEXT:GOTO25
1000 R=-1:J=LEN(IS):IFP>JTHENTS="":RETURN
1001 FORP=PTOJ:IFMIDS(IS,P,I)=BSTHENNEXT:RETURN
                                                                       C ="C:PFINT
1002 R=2:K=P:TS=MIDS(IS,P,1):IFTS>=ASANDTS<=ZSTHEN1010
1663 IFTS>=XSANDTS<=YSORTS=DSTHEN1667
1004 P=P+1: RETURN
1007 FORP=PTOJ:TS=MIDS(IS,P,1)
1008 IFTS>=XSANDTS<=YSORTS=DSTHENR=0:NEXT
1009 TS=MIDS(IS,K,P-K):RETURN
1010 FORP=PTOJ:TS=MIDS(IS,P,1)
1011 IFTS>=ASANDTS<=ZSTHENR=1:NEXT
1012 TS=MIDS(IS,K,P-K):RETURN
1100 K=LEN(T$):FORJ=PTOLEN(I$):IFMID$(I$, J, K)<>T$THENNEXT:R=1:RETURN
1101 IFLEN(I$)=0THENI=0
1102 P=J+K: R=0: RETURN
2000 PRINT"NOT A COMMAND": GOTO25
2001 PRINT"SYNTAX ERROR": GOTO25
2002 PRINT"ILLEGAL LINE NUMBER": GOTO25
2003 PRINT"EDITOR BUFFER FULL": GOTO2100
2004 PRINT"PARAMETER VALUE ERROR": GOTO25
2005 PRINT"NOT ENOUGH SPACE TO INSERT": GOTO2100
2006 PRINT"THE DATA SET IS EMPTY": GOTO25
2607 PRINT"TEXT COULD NOT BE FOUND": GOTO2100
2100 IFM=OTHENSOOS
```

UNUSED: 1/2 INSERTING 1 USED: 0/1 F () I() B() L() 1 2/0 0 [1] 1/0 2 3 3 4 2 4 5 3 5 6 6 7 5 8 6 8 10 9 8 10 0 F=C R=C C=1 Fig. 5.

2102 PRINTL(M) TAB(10)L\$(M): GOT025

where the new record will be inserted. B is a backward pointer which points to the line with the next lowest line number compared to the line number of the line being added. F is a forward pointer and points to the line with the next higher line number compared to the line number of the line being added. It is on these three lines that all action or pointer changes will occur.

The part of the insert algorithm that searches through the data set and sets up these three pointers is shown in Fig. 4 from point A to B. Once we are

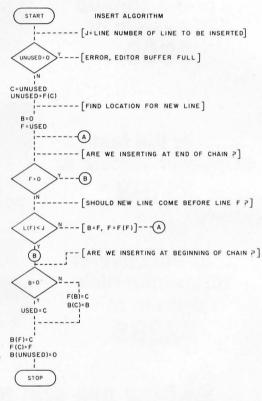


Fig. 4. Insert algorithm.

| UNUSE USED: | ED: 1 | /5 | INSERTING |
|----------------|--------------|---------|-----------|
| I() | F () | B() | L() |
| 1 2 3 | 5/2 | 0/4 | [18] |
| 4 | 2/1 | 3 | 1 4 |
| 5 6 7 | 6 7 | 5 | |
| 8 | 8 9 10 | 7 8 | |
| 10 | o | 9 | |
| B=4 | F=2 | C=1 | |
| | | Fig. 6. | |

| UNUS! | ED: 4 : 3 | | INSERTING |
|-------|--------------|---------|-----------|
| I() | F () | B() | L() |
| 1 | 2 | 3/4 | 17 |
| 2 | 0 | 1 | 20 |
| 3 | 1/4 | 0 | 1 |
| 4 | 5/1 | 0/3 | [4] |
| 5 | 6 | 4/0 | |
| 6 | 7 | 5 | |
| 7 | 8 | 6 | |
| 8 | 9 | 7 | |
| 9 | 10 | 8 | |
| 10 | 0 | 9 | |
| E=3 | F=1 | C=4 | |
| | | Fig. 7. | |

at point B, the actual pointer changes can begin.

In performing the final part of the insert operation, four cases must be handled: (1) the new record, the only one in the data set; (2) the new record at the end of the data set; (3) the new record at the front of the data set; and (4) the new record within the middle of the data set. The insert algorithm must alter the data set pointers differently for each of these cases.

The illustrations in Figs. 5, 6 and 7 show how the algorithm reacts to different situations by varying the pointers them-

selves as well as the actual number of pointers that are changed.

DELETE. Fig. 8 shows the algorithm for deleting a line from the data set. The first step is to locate the slots in the data set where pointers will change. To do this, the program searches the used chain of the data set and sets up the variables B and F to key slots.

Fig. 9 illustrates this with an example. The variables B and F appear at the bottom of the illustrations. B and F are set up to point to the slot containing the line number and text to be

START DELETE ALGORITHM -----[SELINE NUMBER OF LINE TO BE DELETED] -- FIND THE LINE TO DELETE B = 0 C=USED F=0 -----(A) Y----[ERROR, LINE NOT FOUND] -----[IS C THE ONE TO BE DELETED ?] L(C)>=S > --- [c=F(c)]---(A) B=C F = C [ARE WE DELETING THE FIRST RECORD] [ON THE CHAIN ?] > --- [USED = F(F), B(USED) = 0] --- B B -- [FOUND THE LINE TO DELETE, CORRECT] [POINTERS IN PREDECESSOR AND SUCCESSOR.] F(B(B))=F(F) B(F(F)) = B(B) ----- [FREE UP SPACE IN UNUSED CHAIN] F(F)=UNUSED B(UNUSED)=F UNUSED=B STOP

Fig. 8. Delete algorithm.

UNUSED: 2/1 DELETING 1 USED: 1/0 F () I() B() L() 0/2 0 [1] 3 0/1 3 4 4 5 5 67 4 6 5 7 8 8 9 9 10 10 0 9 B= 1 F=1Fig. 9.

deleted.

After the slots where pointer changes are to occur are located, the final operation of the DELETE command is to change pointers on these lines to maintain the used chain in numerically ascending order of line numbers.

There are three cases the algorithm must consider: (1) the record to be deleted is at the front of the chain; (2) the record to be deleted is at the back of the chain; (3) the record to be deleted is within the middle of the chain. The examples in Figs. 9 and 10 illustrate several

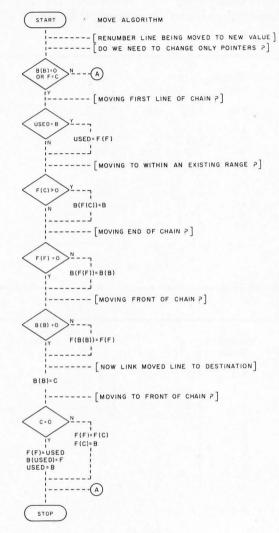


Fig. 11. Move algorithm.

| UNUS | | 1 | DELETING |
|----------------------------|---------------|---------------|----------|
| I() | F () | B() | L() |
| 1 2 | 2/5 | 1/4 | [17] |
| 2 3 4 5 6 7 | 4 1/2 6 | 0 3 0/1 | 4 |
| | 7 8 9 | 5 6 7 | |
| 8 9 10 | 10 | 7 8 9 | |
| B=1 | F=1 | | |
| | | Fig. 10 | |

of these cases.

Note that the record is really not physically deleted, but rather, pointers are changed so that it is transferred from the used chain to the unused chain and thus appears deleted. This is a design feature of the editor that greatly saves time.

MOVE. The MOVE command algorithm is shown in Fig. 11, with supporting examples in Figs. 12, 13 and 14. Once again, the first part of the algorithm involves identifying the slots where pointers must be changed. The three variables B, F and C are set up to perform this function; these variables appear at the bottom of each example.

B and F both point to the slot containing the line to be moved. C points to the slot

| UNUSEI USED: | 5: 5 3. | /4 | MOVE 1 | Τ̈́O | AFTER | 20 |
|------------------|------------|----------|--------|------|-------|----|
| I() | F() | B () | L() | | | |
| 1 | 2 | 4 | 17 | | | |
| 2 | 0/3 | 1 | 20 | | | |
| 2 3 | 4/0 | 0/2 | [1] | | | |
| 4 | 1 | 3/0 | 4 | | | |
| 5 | 6 | 0 | | | | |
| 4 5 6 7 | 7 | 5 | | | | |
| 7 | 8 | 6 | | | | |
| 8 | 8 | 7 | | | | |
| 9 | 10 | 8 | | | | |
| 10 | 0 | 9 | | | | |
| B= 1 | F=1 | C=2 | | | | |
| | | Fig. 12. | | | | |

| UNUS | | /2 | MOVE | 2 TO | BEFORE | 1 |
|--------|--------|---------|------|------|--------|---|
| I() | F() | B () | L() | | | |
| 1 | 2/3 | 0/2 | 1 | | | |
| 2 | 3/1 | 1/0 | [2] | | | |
| 3 | | 2/1 | 3 | | | |
| 4 | 0 5 | 0 | | | | |
| 5 | 6 | 4 | | | | |
| 6 | 7 | 5 | | | | |
| 7 | 8 | 5 | | | | |
| | 9 | 7 | | | | |
| 8 9 | 10 | 8 | | | | |
| 10 | 5 | 9 | | | | |
| B=2 | F=2 | C=0 | | | | |
| | | Fig. 13 | 3. | | | |

```
MOVE 17 TO AFTER 1
UNUSED:
USED:
         F ()
                   B ()
                            L()
I()
                            [17]
          2/4
                   4/3
2
                   1/4
3
          4/1
                   0
                   3/1
4
          1/2
5
                   0
6
                   5
                   6
7
          8
0
          9
          10
                   8
                   9
10
          0
                C = 3
B= 1
        F=1
                   Fig. 14.
```

whose line number is immediately before the destination line number of the line being moved. Or, in other words, after the line is moved, C will point to the slot containing the immediately preceding line.

After B, F and C have been set up, the final portion of the move algorithm is executed.

This part changes pointers in the data set in order to implement the move.

There are several important cases that the algorithm must handle: (1) a line is being moved from the front of the data set; (2) a line is being moved from the back of the data set; (3) a line is being moved from within

```
NUMBER OF LINES IN EDITOR BUFFER (CURRENTLY 60)
       BACKWARD POINTER ARRAY
B(N)
       FORWARD POINTER ARRAY
F(N)
L(N)
       LINE NUMBER ARRAY
L$(N)
       LINE TEXT ARRAY
       " A"
A$
       "Z"
Z$
X$
       "0"
Y$
       "9"
D$
       11 11
B$
       11 11
C$
       "DIPCFONTBRMEWLSKQX" COMMAND STRING CONTAINING
       FIRST LETTER OF EACH COMMAND.
0
       OPERATION CODE
        1 = DELETE, 2 = INSERT, 3 = PRINT, 4 = CHANGE
        5 = FIND, 6 = OVERLAY, 7 = NEXT, 8 = TOP
        9 = BOTTOM, 10 = RENUMBER, 11 = MOVE, 12 = EXCERPT
        13 = WRITE, 14 = LOAD, 15 = SAVE, 16 = KILL
        17 = QUIT, 18 = XRAY
1$
       INPUT STRING FROM USER'S TERMINAL
       TEMPORARY STRING
T$
S$
       OLD TEXT
E$
       NEW TEXT
В
       BACKWARD POINTER
C
       CURRENT POINTER
       FORWARD POINTER
       CURRENT LINE NUMBER
M
       CURRENT LINE INDEX
       CHARACTER POINTER
U
       USED CHAIN POINTER
UN
       UNUSED CHAIN POINTER
BY
       LINE NUMBER INCREMENT VALUE
       TEMPORARY VARIABLE
       TEMPORARY VARIABLE
K
       TEMPORARY VARIABLE
       RETURN CODE FROM TEXT PROCESSING SUBROUTINE
```

Fig. 15. Program variables.

| [LINE NUMBER] | [FUNCTION] |
|---------------|------------------------|
| 1-24 | INITIALIZATION |
| 25-49 | COMMAND PROCESSOF |
| 50-99 | DELETE |
| 100-149 | INSERT |
| 150-199 | PRINT |
| 200-249 | CHANGE |
| 250-299 | FIND |
| 300-349 | OVERLAY |
| 350-399 | NEXT |
| 400-449 | TOP |
| 450-499 | BOTTOM |
| 500-549 | RENUMBER |
| 550-599 | MOVE |
| 600-649 | EXCERPT |
| 650-699 | WRITE |
| 700-749 | LOAD |
| 750-799 | SAVE |
| 800-849 | KILL |
| 850-899 | QUIT |
| 900-949 | XRAY |
| 10 00-1099 | EXTRACT NEXT PARAMETER |
| | |
| 2000-2099 | PRINT ERROR MESSAGES |
| 2100-2199 | PRINT CURPENT LINE |
| | |

Fig. 16. Program index.

the data set; (4) a line is being moved to the front of the data set; (5) a line is being moved to the back of the data set; (6) a line is being moved to within the data set. Note that as shown in the examples, no data is physically moved. Rather, all pointers are rearranged to relink the data set so it appears to have been moved. Again, this design

NOT A COMMAND

The command entered is not one of the legal recognized commands available. See Fig. 1 for the list of possible commands.

TEXT COULD NOT BE FOUND

The text being searched for could not be found within the range of lines being operated on.

BOTTOM OF DATA SET REACHED

The user attempted to move beyond the current lower boundary of the data set.

TOP OF DATA REACHED

The user attempted to move beyond the current upper limit of the data set.

THE DATA SET IS EMPTY

The user requested a command but there is no data to act upon.

SYNTAX ERROR

Error in command format, options, or delimiters which results in ambiguous interpretation by the editor.

ILLEGAL LINE NUMBER

Line specified which does not exist or is out of range. EDITOR BUFFER FULL

The editor buffer is filled to capacity. The program can be changed to extend this limit.

PARAMETER VALUE ERROR

By value is < .0001 or > 10,000 or last line of range is less than first line of range.

NOT ENOUGH SPACE TO INSERT

Attempt to insert or move on top of existing lines. This usually means the BY value is not low enough to allow the full range of lines to be inserted or moved. The last line printed is the last line moved or inserted. If the BY value is already at its lowest allowed value (.0001) and there is still no room, the RENUMBER command can be invoked to clean up the data sèt and provide additional room.

Fig. 17. Output messages.

feature saves time.

Conclusion

Version 5.0 of the editor adds a new philosophy to DELETE, OVERLAY and MOVE commands. Rather than operate on one line at a time as shown in the examples, these commands now operate on an entire range of lines at once. Thus, while it used to take roughly five times as long to delete five lines as it did for one line, it now takes no additional time to DELETE or OVERLAY a complete range of lines.

The MOVE command operates similarly, but is not as fast since it still must physically change all line numbers in the range of lines being moved. Also, the MOVE command has a nice feature that first checks if the entire move can take place successfully. If it determines that it can, it will go ahead and execute it; otherwise, it will print an error.

Many commercial editors operate on a line-at-a-time basis and can leave you stranded halfway through a move if the current line being moved won't fit at its new destination. Interestingly enough, the algorithms to operate on an entire range are nearly the same as those for the single line case; the main difference is that the B and F single variables are set up differently to start with.

1) For those who want to label the pages of text they are saving and loading, the SAVE and LOAD commands can be changed to SAVE <NAME> and LOAD <NAME>, where <NAME> is a single character file name. To add this tape file header feature, insert the following lines:

701 GOSUB1000:IFR<0THEN710

702 R = ASC(LEFT\$(T\$,1))

703 WAIT6,1,1:IFINP(7) <>RTHEN703

751 GOSUB1000:IFR<0THEN760

752 WAIT6,128,128:OUT7,ASC(LEFT\$(T\$,1))

2) For Mits 8K BASIC 4.0, add the following lines to the code to allow commas & colons to appear in text:

6 POKE2507,34:POKE2509,34

851 POKE2507,58:POKE2509,44

By doing this, BASIC will be altered upon editor initialization, and restored to normal when the user leaves the editor via the QUIT command.

Fig. 18. Special options.

ATTENTION NORTH STAR USERS ARIAN: 8080/Z-80 Operating System, Assembler, Text Editor Debugger, Dynamic File Capabilities. Save & Load Source/OBJ. Files to Disk. Resident and Custom Commands. Truly a powerful, yet easy to use Operating System. = =>> \$50.00 INVESTMENT PACK: Stocks, Bonds, etc. Statistical nalysis, Portfolio Management, Options, much more = = = >> \$25.00 FAMILY PACK: Programs for home and family. Includes Mail List, Phone List, Recipe Analysis, Home Budget, = = = >> \$25.00 ASSEMBLY LANGUAGE PROGRAMMING COURSE: Level #1, beginners. Tired of not understanding Assem. Lang. programs? Get this course and begin writing your own code. = >> \$25.00

TYPING COURSE: If you're still using "hunt and peck" then

(Illinois residents add 5% sales tax)

P.O. Box 1628. Champaign, IL 61820

you need Supersoft's Typing Course!

#1913-System Monitor — Write, Modify, De-bug and save machine language programs. Includes quick re-start feature if our program bombs. User manual & Zebo reference manual included. This is a separate package and cannot be combined with other programs for qty. discounts. Please specify if for 4K or 16K ram and for Level I or Level II. \$8.95 + .50 postage & handling. #1825-Teletype Interface — Machine language program to send & receive Baudot TTY at 60 or 100 wpm using TRS-80 cassette plugs. Requires 2 common ICs, 2 optional isolators and +5 Vdc. #0102-All-Star Baseball #1402-Nim/Batnum #0318-Craps/Reverse #1305-Math Educator #1812-Real-Time Lander #2321-Wumpus #1920-Star Trek-(4K or 16K Level I or 16K Level II only) #0612-File Locator #1518-Oriental Rings #0218-Biorhythm Order by Cat. No. and Name. All programs run in minimum 4K Level I or Level II except as noted. If ordering for Level II, add "-!!" after Cat. No. and "Level II"


CASSETTE SOFTWARE FOR TRS-80

Order by Cat. No. and Name. All programs run in minimum 4K Level I or Level II except as noted. If ordering for Level II, add "-II" after Cat. No. and "Level II" after name. Level I will be shipped unless specified Prices: \$7.95 ea., \$13.95 for 2, \$23.95 for 4, 6 or more \$5.00 ea. Please include \$.50 for each program for postage & handling. Check, Money Order, Visa or Master Charge only. No C.O.D.

In the works-Available soon will be a series Small Business programs for the 32K System using mini-discs and line printer. We'll keep you posted.

Esstoo-Deetoo Products
P.O. Box 6128 Shreveport, LA 71106 -

E29

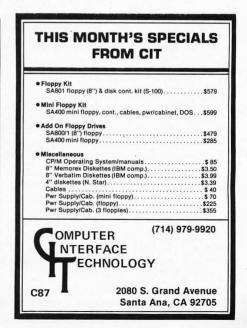

At Last: A Client Timekeeping System

Many different businesses have to accurately keep track of the time expended, or spent with a client...for billing purposes. What better way to put the computer to work?

This is a fantastic article . . . for several reasons. First, if you want to see someone get really excited about it, try taking it to your lawyer and see what he has to say. A lawyer once said that having a computer only for keeping track of client time would be worthwhile. No telling how true that was, but the value he placed on such a program was certainly impressive. Then

along comes Bill Welborn, attorney-at-law, who has generated such a program! Aside from the value of the program itself (and it applies to businesses other than law firms), there are several "hidden" features that make the article worthwhile reading for everyone. Bill discusses some conversion techniques going from IBM 370 BASIC to some of the popular

microsystem BASICs...and he has some interesting comments on dealing with customers and the importance of backup data files.—Eds.

Do you own a business where clients or customers are billed by the hour? ... know anyone who does?... want to set up a computerbilling service for such a business? If you can answer any of these questions in the affirmative, these programs are for you.

Such businesses include law offices, accounting firms, surveying companies, consulting firms and others in which a client comes in, describes his problem, and the firm charges an hourly rate for trying to work that problem through to a solution. The rate might run anywhere from ten to one hundred dollars per hour, depending on the type of firm and the nature of the problem.

Although IBM, DEC and other hardware manufacturers have excellent program packages for hourly billing (which work only on their \$30,000 wonders, of course), they are about the only companies offering such software for the above businesses. For example, although there are five computerbilling services in my area (a city of over 175,000), none of them offers a billing service tailored to the needs of the professional office. Their programs are for department-store and other retail operations. I have presented here two programs that just might give you a start on that market in your town, even if you can't use

```
HOURS
 10 REM
             INPUTS DATA FOR HOURLY CHARGES.
 15 REM
 20 PRINT "NOTE: FOR EXPENSES, ENTER AN 'E' INSTEAD OF DATE, THEN":
 30 PRINT "THE DATE-SERVICE AS ONE ITEM, A ZERO AND, FINALLY, THE AMOUNT."
 35 REM
 40 REM
             NAME THE FILE AND INITIALIZE THE RECORD POINTER (C)
 50 FILES HOURS1
 60 LET C=0
 70~{\rm REM} \, TELL THE CPU WHERE TO GO ON FINDING A BLANK RECORD TO WRITE ON 80 IF END OF 1 THEN 130
 90 REM
             FIND BLANK RECORD
 95 REM
100 LET C=C+1
110 READ #1,C;A$
120 GOTO 100
130 PRINT C: "CLIENT NAME, PROJECT":
140 REM
             C (RECORD NUMBER) SHOWS WHAT RECORD YOU ARE ON.
150 REM
             WHEN INSTRUCTIONS ABOVE PRINT, A BLANK REC. HAS BEEN FOUND
160 REM
             AND IS WAITING FOR DATA INPUT.
170 INPUT A$,B$
180 PRINT "DATE, SERVICE, BY, HRS":
190 REM
             ABOVE PROMPTS THE OPERATOR. NOW, ALLOW ENTRY OF DATA.
200 INPUT M$,C$,P,D
205 REM
210 REM
             GIVE OPERATOR A CHANCE TO CORRECT ERRORS AND THEN WRITE TO FILE
220 PRINT "ALL CORRECT":
230 INPUT E$
240 IF E$="N" THEN 130
250 WRITE 1,C;A$,B$,M$,C$,P,D;END
260 PRINT "ANOTHER ENTRY":
270 INPUT F$
280 IF F$="Y" THEN 90
290 REM
             IF THERE IS MORE DATA, WE LOOP AND GET NEW RECORD. IF NOT, END IT.
300 END
```

Fig. 1. HOURS. The data input program written in IBM 370 BASIC, Version 3.1. See text for details.

HOURS-variables:

| Name | Description |
|------|--|
| C | Record counter (pointer) |
| A\$ | Client names |
| B\$ | Client project name |
| M\$ | Date field (Also used as key when it contains an E) |
| C\$ | Service rendered |
| Р | Partner code—who did work |
| D | Hours used for service (or dollar amount in an expense record) |
| | HRSCAL—variables: |
| | SAME AS ABOVE, EXCEPT: |
| U\$ | Date of billing |
| Z | Rate per hour |
| Z1 | Product of rate times hours |
| Z2 | Z1 rounded to cents (####.##) |
| D1 | Total of hours |
| D2 | Total of expense record dollar amounts |
| D3 | Grand total of Z2 + D2 (amount of bill) |
| M, K | Record counters (pointers) |
| | |

Fig. 2. List of variables used in both programs. Most micro-based BASICs permit more than one letter + number variable names; rename the variables for clarity if you wish.

Same as A\$,B\$, except input from terminal

them yourself.

X\$,Z\$

Remember, too, that to the extent you use your computer for a business purpose, you can probably deduct a portion of the expense for upkeep (as well as depreciate a portion of the cost of your system) when April 15 rolls around. See your accountant or tax lawyer for details (and hope he is right!).

Why the Programs?

I am a member of a threeman law office. Several years. ago, I designed (but did not program-it's in IBM 370 assembly language!) a fairly extensive billing system for our office. This system is still running on a line to the IBM 370, but soon we will have our own micro doing the work. Anyway, the main system does not have provisions for hourly billing of clients; we generally just don't work that way. Usually, when a client has a case for us, we quote him a fee out front and that's that-if we go over, we just have to eat the loss.

However, after the system was in operation, I found out that there were enough exceptions to our usual way of doing business that it was rapidly becoming a real drag to do the hourly-rate billing manually.

So, I asked the people who did the original programming to quote me a price. Wow! . . . it would astound you. They had apparently undercharged a great deal on the main package and figured it was time to make up the loss. So, forget that!

Then, after a while, I asked the computer center where the IBM monster is located how much more a month it would cost us to add BASIC facilities (including three or four data files) to our system. Believe it or not, the answer was \$35, plus \$50 per hour of CPU time over one-half hour. Man, I was in! Not only could I have our hourly billing done by computer, but I could also have a lot of fun playing around with

all the Kilobaud programs that were just then being published.

I ordered the BASIC hookup, enrolled in a computer-science course at one of the local universities, and got to work. (By the way, we have yet to use that first half hour of CPU time, despite extensive use of the BASIC system for much more than is described here.) As a novice at programming, I took a while to come up with the right concept for hourly billing -and a little while longer to get the programs to work as I wanted them to. But, I did learn a lot . . . I still am. And, the programs do work.

Some Road Maps

We're going to go through the programs in detail together. Where it seems appropriate, I'll comment on features not found on most micro-BASICs and what to do about the problems thus presented (later, I will present a separate section on this same subject).

Then, and throughout, I'm going to beat you to the draw and make some critical comments about the programs: They are basic, as well as BASIC. I will have some comments and suggestions about making the programs better as well as modifications for faster operation and different conceptions of the problem to be solved.

Finally, if you're still with me at that point, we will explore some ways that the programs can be made to work with tape instead of disk. Get your computer's BASIC manual and a

beer (or something) and let's get started.

General Information

There are two main programs: HOURS and HRSCAL. The first permits entry onto a file of time spent for particular clients, and the second program prints the bills. Both programs assume that you are working with files on disk that: (a) have been allocated in the system; (b) are random access; (c) start with record #1; (d) contain 128 bytes per record; and (e) have a maximum of 256 records per file. If these assumptions are not valid for your system, please don't give up just yet; the programs (as listed) are not really random access and should work with tape, as we will discover later.

Hours

The listing is in Fig. 1; the list of variables is shown in Fig. 2. In the following text, numbers in parentheses are statement numbers. For now, forget statement 20, alright?

First, open the file for access (read and write). This is the statement FILES HOURS1 (50). HOURS1 is the name of the file. and the statement works in the IBM implementation of BASIC, but probably won't in yours. You'll just have to look in your manual and see what you need to do. For example, in the excellent BASIC implementation by Alpha-Micro Technology for their 16-bit microcomputer, the statement would be:

50 OPEN #1, "HOURS1", RANDOM, 64, C

In most all disk systems, after the file has been opened it

```
260 REM
           IF MORE FOR SAME CLIENT & PROJECT.
                                                   STEP RECORD
270 REM
           COUNTER AND PROCEED -- NO SEARCH FOR BLANK RECORD.
           "ANOTHER ENTRY FOR SAME CLIENT AND PROJECT":
    PRINT
   INPUT F$
IF F$="N"
290
                      340
               THEN
295
300 LET C=C+1
310 GOTO 180
320 REM
           IF THERE IS NO MORE DATA FOR SAME CLIENT, SEE IF
          THERE IS MORE FOR ANOTHER: IF SO, LOOP.
"MORE FOR DIFFERENT CLIENT OR PROJECT":
330 REM
340
   PRINT
350
    INPUT F$
360
    IF F$="Y" THEN 100
370 REM
           IF NO FURTHER DATA, ENDIT
380 END
```

Fig. 3. Additions/substitutions to HOURS. Use is explained in text. Please observe cautions outlined there.

IF C>255 THEN PRINT "FILE FULL": GOTO 300

Example 1.

```
WED 14:21
HOURS
              3/8/78
NOTE: FOR EXPENSES, ENTER AN E INSTEAD OF THE DATE, THEN
THE DATE-SERVICE AS ONE ITEM, 'BY' AND, FINALLY, THE AMOUNT
1 CLIENT NAME, PROJECT? JOHN SMITH, DIVORCE DATE, SERVICE, BY, HRS? 11/1/77, INITIAL CONFERENCE, 3, 2.5
ALL CORRECT? Y
  2 CLIENT NAME PROJECT? PETE JONES TRUSTEE
DATE, SERVICE, BY, HRS? 1/12/77, TELCON JUDGE RE APPOINTMENT, 2, . 5
ALL CORRECT?
ANOTHER ENTRY?
ANOTHER ENTRY: 1
3 CLIENT NAME, PROJECT? JOHN SMITH, PETERS CONTRACT
DATE, SERVICE, BY, HRS? 12/1/77, REVIEW OLD CONTRACT, 1, 3.25
ALL CORRECT?
ANOTHER ENTRY?
4 CLIENT NAME, PROJECT? JOHN SMITH, DIVORCE DATE, SERVICE, BY, HRS? E, 11/2/77 FILING FEE, 0, 28
                                                                             Underscored
ALL CORRECT?
                                                                            items were input
ANOTHER ENTRY?
5 CLIENT NAME, PROJECT? PETE JONES, TRUSETT DATE, SERVICE, BY, HRS? 1/15/78, COURT HEARING, 2
                                                                              by operator.
ALL CORRECT?
5 CLIENT NAME, PROJECT? PETE JONES, TRUSTEE DATE, SERVICE, BY, HRS? 1/15/78, COURT HEARING, 2, 4.5
ALL CORRECT?
ANOTHER ENTRY?
ANOTHER ENTRY: 1
6 CLIENT NAME, PROJECT? JOHN SMITH, DIVORCE
DATE, SERVICE, BY, HRS? 11/6/77, FINAL HEARING, 2, 1.5
ALL CORRECT
7 CLIENT NAME, PROJECT? JOHN SMITH, PETERS CONTRACT
DATE, SERVICE, BY, HRS? E, 12/3/76 L.D. PHONECALL: N. 1
                                                 L.D.PHONECALL:N.Y.,2,5.67
ANOTHER ENTRY? N
```

Fig. 4. Actual entry using HOURS. In this case, file was empty, so entries started with record one. Note the error made at record #5 and the subsequent correction. If this had not been corrected, the record would have been bypassed by HRSCAL. (See text discussion.) Compare the entries to the bills printed by HRSCAL (Fig. 6).

is referenced by number. Since there is only one file in the HOURS program, it is referenced by the number 1. Frequently, a pound sign (#) is used before the file number to indicate that it is a disk file.

After the file has been opened, we have to find a blank record (or a closed one) on which to write new data. This is the purpose behind statements 80 through 120; these deserve a lot of explanation. I'll try to be brief, without being too cryptic.

The variable C is a record pointer that starts at 1 and is incremented by 1 each time through the loop formed by statements 100 through 120. Now, this loop looks as though it will go on endlessly reading record after record-never printing anything and never stopping. Ha! The key to this particular madness is statement 80. In most largecomputer BASICs, any blank record anywhere in the file is full of ASCII nulls. When the computer reads a null record, it will look for an IF END THEN ... statement and will go where that statement directs it. If there is no IF END statement, then you will get a program termination and a nasty message.

So, when the computer comes (in the course of the loop) to a null record and tries to read it, the program execution jumps to statement 130 because of the IF END statement. The absence of an IF END statement (function) in most microcomputer BASIC implementations is problem number one. We will solve that one together later on. Take it on faith for now, OK?

At statement 130, the record number found is printed, together with an operator prompt: "CLIENT NAME, PROJECT". Then (170) the operator inputs the client's name and the project for that client. Note, please, that there are two string variables here. These are not for last name and first name. A\$ is for both names and B\$ is for the particular project (case) name for that client. In the print program, bills are separated both by name and project. One client, for example, might get five bills, if he has five cases with the office. This is done for the client's bookkeeping, so he can allocate his costs properly.

After this data has been input, another prompt gives the operator the cue to enter date, service rendered, by whom it was rendered and the number of hours (to the nearest tenth) it took to do the work.

There are a couple of things to note here. First, you may wonder why the date is a string and not a numeric variable. OK, now look back at statement 20. If the date-field has an E in it. the item is an expense item and we are going to do something different with it in the print program. Any business using these programs will have expenses that are to be charged to the client: phone calls, copy costs, travel and so on. The above is a way to get those expenses in. There are other ways, of course, . . . better ways, maybe, especially from the operator (human-engineering) standpoint. But, this way

Fig. 5. HRSCAL listing. See text for details.

```
10 REM
                  THIS PGM. CALCULATES TOTAL HOURLY CHARGES
 20 REM
                  FOR A NAMED CLIENT AND PROJECT.
 30 LET U$=DATE
 40 PRINT SKP(2)
            NAME THE SOURCE FILE AND THE WORK FILE.
                                                     CLEAR THE WORK FILE.
 50 REM
            ZERO EVERYTHING AND TELL THE CPU WHAT TO DO WHEN IT FINDS ALL
 60 REM
 70 REM
            THE RECORDS YOU WANT IT TO FIND.
 75 REM
 80 FILES HOURS1.TRUST2
 90 ERASE 2
100 LET Z,Z1,Z2,D1,D2,D3,C,M,K=0
110 IF END OF 1 THEN 340
120 PRINT "CL.NAME, PROJECT":
           ENTER THE CLIENT'S NAME, PROJECT, AND HOURLY CHARGES
130 REM
140 INPUT X$,Z$
150 PRINT "RATE":
160 INPUT Z
170 REM
            SEARCH THE SOURCE FILE FOR THE NAMED CLIENT
180 LET C=C+1
190 READ #1,C;A$,B$,M$,C$,P,D
200 IF A$=X$ THEN 220
210 GOTO 180
220 IF B$=Z$ THEN 260
230 GOTO 180
            IF THE FILE NAMES MATCH BUT THERE IS AN 'E' IN THE DATE FIELD,
240 REM
            GO ADD THE EXPENSE AMOUNT BEFORE WRITING TO THE WORKFILE.
250 REM
260 IF M$="E" GOSUB 970
            ADVANCE RECORD POINTER IN WORKFILE AND WRITE THE DATA.
270 REM
280 LET M=M+1
290
   WRITE 2,M; A$, B$, M$, C$, P,D; END
            LOOK FOR THE NEXT MATCH IN SOURCE FILE--LOOP TILL FOUND
300 REM
310 GOTO 180
            WHEN ALL MATCHES HAVE BEEN FOUND, THE WORK FILE IS COMPLETE:
320 REM
            AND WE START PRINTING OUT THE BILLING FOR THIS CL-PROJ.
330
    REM
340 PRINT SKP(2)
PRINT SPA(5): "ACCOUNT OF ":X$:"--": "Z$"; " AS OF ":U$
390 PRINT
400 PRINT SPA(2): "DATE": TAB(12): "SERVICE RENDERED": TAB(50): "BY":
410 PRINT TAB(58):"HOURS"
420 IMAGE "###.##"
    IF END OF 2 THEN 550
```

is simple, and it works. Experience shows that the operators in our office, at least, are not even slightly confused by this (why, I don't know; it confuses me whenever I try to input this program).

Note, too, that the "BY" field is numeric-we use a number code to indicate who did the work. If initials seem better for you, then just change the variable P to P\$ in all the programs.

It is a good idea to give the operator a chance to correct an entry if a goof is made (but not caught) before return is hit. This is done in statements 220 through 240. If all is OK, the operator inputs a "Y" and the data is written to the file. Then, we ask if there is more data. If so, the search for a blank record is done again and the program repeats. If not, the program ends.

Gaze, if you will, at Fig. 3. This code is actually what we use. It permits stepping the record counter by one and eliminating the entry of client name and project identification if there is another entry for the same client and project.

This is very handy, but I have left it out of the main listing for this reason: If you have erased a record (say, record #47) by filling it with nulls-either manually or by virtue of the computer's ERASE statement-the next record might be full of another client's information. When you search for the first blank record (for the first entry), you will, of course, find record #47. Then, the code in Fig. 3 would advance you to record #48, and would then write new data on top of what was already there, destroying the old data.

So, use the code in Fig. 3 only with this restriction in mind. Some later discussion might help here, but this is already complicated enough without further clutter at this point.

A sample of the entry you will get with HOURS is shown in Fig. 4. Notice, particularly, the incorrect entry and the correction thereof.

Before I go on: an aside. You may have wondered why the

```
START THE WORKFILE RECORD POINTER AND GO----
440 REM
450 LET K=K+1
460 READ #2,K;A$,B$,M$,C$,P,D
470 REM
            HOLD UP FOR NOW IF AN EXPENSE ITEM FOUND--WILL PRINT LATER.
480 TF MS="E" THEN 450
            OTHERWISE, PRINT THE DATA (NOT NAMES) KEEPING TRACK OF TOT. HOURS
490 REM
500 PRINT M$:TAB(10):C$:TAB(50):P:TAB(57):
510 PRINT USING 420,D
520 LET D1=D+1
530 GOTO 450
            NEXT STATEMENTS EXECUTE ONLY AFTER FIRST END OF FILE#2 REACHED
540 REM
550 PRINT TAB (57):
560 PRINT TAB(40): "TOTAL HOURS": TAB(57):
570 PRINT USING 420,D1
            MULTIPLY RATE TIMES HOURS, ROUND TO CENTS AND PRINT IT
580 REM
590 PRINT
600
    IMAGE "#####.##"
610 LET Z1=Z*D1
620 LET Z2=INT(Z1*100+.5)/100
630 PRINT TAB(40): "TOTAL FEE IS": TAB(55): "$":
640 PRINT USING 600, Z2
650 PRINT
660 REM NOW, GO BACK AND GET THOSE EXPENSE ITEMS; PRINT HEADINGS AND DATA 670 IF END OF 2 THEN 770
680 PRINT "LIST OF EXPENSES:"
690 PRINT " DATE":TAB(12):"FOR":TAB(30):"BY":TAB(40):"AMOUNT"
700 LET K=0
710 LET K=K+1
720 READ #2,K;A$,B$,M$,C$,P,D
730 IF M$<>"E" THEN 710
740 PRINT C$:TAB(30):P:TAB(38):"$":
   PRINT USING 600,D
760 GOTO 710
770 PRINT
             ADD ALL EXPENSES TO TOTAL HOURLY CHARGE AND PRINT TOTALS
780 REM
   LET D3=Z2+D2
790
   PRINT TAB(40): "EXPENSES TOTAL": TAB(55): "$":
800
810 PRINT USING 600,D2
820 PRINT
          TAB (57):
          TAB(32): "TOTAL THIS STATEMENT": TAB(55): "$":
830 PRINT
          USING 600,D3
840 PRINT
          SKP(2):TAB(20):"T H A N K
                                        Y O U"
860 PRINT
          SKP (3)
          SPA(10):"*********************
870 PRINT
880 PRINT
          SKP (3)
             THE FOLLOWING GIVES YOU READING OF HOW MANY RECORDS WERE READ IN1.
890
   REM
   PRINT
900
          "RECORDS READ, FILE1...
             IF THERE IS ANOTHER BILL TO PRINT, START OVER: OTHERWISE ENDIT.
910 REM
          "ANOTHER":
920 PRINT
   TNPUT MS
930
940 IF M$="Y"
              THEN 30
950 GOTO 990
960 REM
             FOLLOWS SUBROUTINE TO ADD UP EXPENSE AMOUNTS
970 LET D2=D+D2
980 RETURN
985 REM
```

record pointer, C, is printed out before every entry. There are two reasons. First, I wanted to have a record of every entry on the hard-copy printer we use so that I have something to look back to for troubleshooting. This is valid, I think.

990 END

Second, however, when the operator sees 255 come up, he knows that the file is going to be full with the next entry and must terminate operations and call me. This is not valid-it is crude. In your version of this program, I suggest putting in a statement right after (100). For example, see Example 1. In other words, jump automatically to the end of program on getting a full file and after printing an error message. My operators are used to this, plus we have yet to fill a file before cleaning it out with billing-but why not be a little more elegant?

HRSCAL

The listing of the printout program is shown in Fig. 5. HRSCAL gets a bit more complex than HOURS. The entry program is very simple; HRSCAL is a little more difficult. It searches the file for a match between the client and project names input from the terminal and the client and project names in a record. If a match is found, the record is written to another file (TRUST2) that is used as a workfile. When the end-of-file marker is reached, the bill is formatted and then written from the information in the workfile. That's it, generally. Now, to specifics.

Statement 30 uses a built-in function of IBM BASIC. If you don't have it, use an input statement for the date so your client will know when the bill was prepared.

Both files are opened for access, the second one (workfile) is totally cleared of data and all variables are zeroed (80-100).

Now, we hit that IF END bit again (110). Here, it is used to signal the program to go from the search mode to the printing mode. We'll get into this in some detail in the IF END . . . THEN...section of the article. Don't let the absence of the IF END in your BASIC turn you off; we'll make the programs work anyway.

The operator now inputs the client's name and project (140). It is obvious to you: (a) that a comparison is about to be made of maybe 40 bytes or so of alphanumeric data and (b) that this is not only inefficient but that an operator error on entry of only one letter could cause records to be lost forever. All true.

HRSCAL 06/05/78 MON 16:16

Our firm uses this method because client numbers are used on the main system and there could be a lot of confusion between files. I try to eliminate errors by providing the operator with a list of client names and projects that will be used every time an hourly client's name and project are input to the file.

If you want a faster search and less room for error, by all means use client numbers. The change will only require an additional variable in the record (in HOURS and HRSCAL) and a modification of the search routine in HRSCAL to look for a client number input at statement 140. Of course, each proiect should be logged under a different number in order to keep the feature of different bills for different projects.

To give you some idea if this is really worth changing the programs, I can tell you that the maximum search time using name and project comparison in alpha on our system is .2 seconds. I really doubt whether it would exceed five seconds in any micro-BASIC disk. And, remember, this is a search of all records to find the few for one client. So, I suggest you analyze the trade-off of CPU time vs programming effort and operator error possibility in your system and make your own decision. Printer speed is certainly a factor!

The actual search read and compare is at statements 180-230. The search and compare overhead is cut considerably by the multiple comparisons (200-220). That is, the name is compared first (maybe 20 bytes) and if that doesn't match, the program loops and doesn't bother about comparing the project ID.

At 260, the program looks at the date-field from the data just read from disk. If this is an E, remember, it indicates an expense item. Here is where we keep a cumulative total of the amount, to be used later.

Now, the workfile record pointer (M) is advanced one step and the client's data is written into the workfile

CL. NAME, PROJECT JOHN SMITH, DIVORCE PATE? 40

| | 200111 01 31 | ariii Siiliin | DIVURCE | AS DF 06/05/78 | | |
|---------|--------------|---------------|---------|----------------|------|--------|
| DATE | | E RENDERED | | BY | | HOURS |
| | | CONFERENCE | | 3. | | 2.50 |
| 11/6/77 | FINAL HE | EARING | | 5. | | 1.50 |
| | | | | TOTAL HOURS | | 4.00 |
| | | | | TOTAL FEE IS | \$ | 160.00 |
| LIST OF | EXPENSES: | | | | | |
| DATE | FOR | | BY | AMOUNT | | |
| 11/2/77 | FILING FE | E | 0 | \$ 28.00 | | |
| | | | | EXPENSES TOTAL | - \$ | 28.00 |
| | | | TOTAL | THIS STATEMENT | \$ | 188.00 |

THANK YOU

RECORDS READ 7 ANOTHER? CL. NAME, PROJECT ? JOHN SMITH, PETERS CONTRACT RATE? 50

ACCOUNT OF JOHN SMITH -- PETERS CONTRACT AS OF 06/05/78

| DATE 12/1/77 | SERVICE RENDERED REVIEW OLD CONTRAC | | | | | HOURS 3.25 |
|-----------------|--|----|---|---------|------|---------------|
| | | | Т | OTAL HO | JURS | 3.25 |
| | | | Т | DTAL FE | E IS | \$ 162.50 |
| LIST OF E | EXPENSES: FOR | BY | А | MOUNT | | |

12/3/76 L.D.PHONECALL:N.Y. EXPENSES TOTAL \$ 5.67 TOTAL THIS STATEMENT \$ 168.17

> THANK YIL

(280-290). Then, we loop back to file #1 and look for another match (310).

When the end-of-file #1 is reached, the IF END statement at 110 sends the program to execute statement 340. This is where the printer formats and prints the bill. This part of the program is pretty selfexplanatory. A bill header is printed and then items are read from each workfile record and printed according to the format of statement 500. At the same time, we keep a total of the hours (520). Expense records are bypassed for the moment (480).

You will note that another IF

END statement crept in at statement 390. These are handy little things! The second one takes control and the first one is lost forever. In this case. when the end of the workfile (file #2) is reached, all the records transferred in the first part of the program have been printed out and we go to statements 550-570, which cause a line to be printed under the column of hours and then total hours under that. From there, calculations are done and the charges for time are printed after rounding the result to cents (580-640).

Finally, the workfile is again read; this time just for the expense items. These are printed and totaled; the total is added to the time-dollar total and the billing is closed.

Sample printouts of HRSCAL are shown in Fig. 6. Compare these to the input in Fig. 4 to see how the client-project separation and expense-item entry show up in the bill printouts.

General Micro-Translation Information

Herein find some general ideas about the differences between the BASIC used in these programs and the one you might have available.

I can't get multiple

statements per line on the IBM. You can, so use this feature—it saves memory and paper. Leave all the remarks out if you need even more room in memory. If you need more than 256 records per file, allocate all you need if your system permits (or less, if that is the case). If pressed for disk space, calculate the number of bytes per record you think you will actually take and use that figure in record-length allocation (if your system permits), instead of using the default size of 128 bytes.

Perhaps some of the formatting statements used will not be available to you. SKP (X) will cause the line feed to operate X number of times; SPA(X) causes the space function to operate X number of times; TAB(X) advances the carriage to the Xth space on the page. Knowing what these functions do will allow you to substitute what you have in place of them, if they are not available in your implementation of BASIC.

A colon (:) at the end of a PRINT line leaves my carriage at that point (i.e., no CR or LF is executed). Many microcom-

puter BASICs use a semicolon (;) for the same purpose.

The IMAGE statement causes numeric data to print with the numbers formatted in accordance with the pound signs. That is, if the statement is: 600 IMAGE "#######"; a PRINT statement like: PRINT USING 600, D; will print the variable D with six numbers, a decimal point and two numbers. Leading zeros will be surpressed, and any numbers to the right of the hundredths column will be lost. For example, the number 1234567.904 would print as 234567.90. 456.5 would print as 456.50. If you don't have an IMAGE statement, again, you ought to be able to figure out how to use what you do have in-order to accomplish the same thing.

Most microcomputer BA-SICs are far more sophisticated than the one used on the IBM (i.e., such things as IF THEN ELSE are common). Make the most of what you have!

IF END ... THEN ...

Now, we get down to the real problem—the IF END statement. I certainly don't pretend to know much about all the microcomputer BASICs on the market. But, of those I am familiar with, none have the IF END statement. So, is all lost? No! I wouldn't have written this if that statement were essential. More important, the editors of *Kilobaud* wouldn't have printed it.

There are, in fact, several solutions that are even better than the IF END statement—solutions that will cut down search time by a factor of several hundred. There are other solutions that don't have the timesaving advantage, but will serve exactly the same purpose as the IF END statement.

First, let's look at substitutions for the IF END statement. You can write all zeros (or blanks, or whatever) into every record when you first set up the file. Of course, this will take a separate program, to be run when the file is first allocated. Be sure to use the same data type (string or numeric) for the variables you will eventually use, lest you get a weird result (or error message) when you run the program. If you are careful, you will have another program that checks to be sure that you have really written zeros into every record.

Then, you omit the IF END statement and, instead, ask the computer to continue its searching until it finds a record with the first data item a zero. This will be a blank record you can then write onto. Since you will overwrite the zeros with other data, that record will not be selected the next time you search.

The above, obviously, applies to HOURS. In HRSCAL, a similar scheme can be used to jump to the print portion of the program when you come to the first record with zeros in it—that will appear after all the records with real data have been read. The result of this is exactly the same as using the IF END statement, except that you have provided the end-of-file marker instead of having a built-in feature to do it for you.

You can also accomplish the same thing by writing, say, "9999" or "NNNN" into the record after the last one you use for valid data in HOURS. Then, naturally, you look for that variable content to find the place to write. This is an ancient trick, but is still valid, especially with tape.

A much more sophisticated and a great timesaving approach is to use indexing as an alternative to the IF END statement. In this method, you use the first record of a file to point to the last record used. That is, whenever you run HOURS, you first read record one (the index record), and then you set the record pointer to whatever number is contained in that record, plus one.

Just remember that all records in the file must contain the same data-types. The first item in your record must be a numeric variable (unlike the program listings) if you use an index key, as you will be comparing it to, and exchanging it with, another numeric variable (the record pointer). You will just have to lose the extra bytes that result, unless you also use client numbers. Also remember, unless you key to client numbers, to write a dummy numeric quantity into every record as the first item.

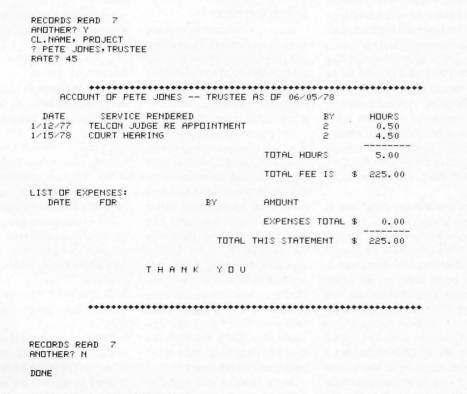


Fig. 6. Actual bills generated by HRSCAL. In actual use, the bill would be cut at the asterisks (*) and sent to client after it was copied. Compare with Fig. 4 to note the selection of items for printing (e.g., the first bill contains data from record #s 1, 4 and 7).

The most obvious advantage of the index method is that you will not have to read the first, say, 250 records to find that the first blank record is number 251. The example below shows some suggested code which would appear right before statement 110. R is the index.

80 I FT C - 1 85 READ #1.C:R 90 LET C = R + 1 95 READ #1,C; R,A\$,B\$,M\$,C\$,P,D (Use statements 110 and 120 as a check to be sure you really have a blank record.)

In the program HOURS, you would then go on to statement 130 and, therefore, write to the last record, plus one, that was in the file before entry. You get the idea by now, I'm sure: Use the first record to store a number that is the last record used for data. Then, use this to find a blank record on which to write new data, CAUTION: You have to write the number of the last record used after the execution of HOURS back into the index record before you exit the program.

And, remember, you make R equal to C before you reset C for a write to record one (the index record)-otherwise, you lose the count of the last record usedl

> 295 Let R = C 300 Let C = 1 305 Write 1, C; R 310 End

In HRSCAL, use the index record to trigger a jump when the record pointer reaches that number. Again, you will have to read in the contents of the index record (#1) before making the comparison.

Using the index method is really a great timesaver in a random-disk system. But, it has its own problems. Not all of these can be discussed in one article, but here is what I feel is the worst: If you want to delete a record from the file, you can, but that space will still not be available to you, as the index record will always point to the last record in the file that has been used. Deleted records will just be bypassed.

Solutions to this include periodically compressing the file to eliminate closed records and replacing them with active records; or a more complex index scheme that will point you to both blank and closed records, as well as the last available record in the file; or, if you will, adopting an I-don'tcare attitude until the file is full and you have to care.

As was intimated before, the IF END use is an adoption of the I-don't-care attitude. When the file is full, you run bills, erase the file, and that is the end of that. A more complex attitude is just going to require more complex proceduresand some more companion programs.

Indexing also could be used to save the second pass through the workfile in HRSCAL-the pass used to find the expense items. Instead of just bypassing an expense record on the first pass, write its record number into an array. Then, when you are ready to print the expense items onto the bill-form, pull these numbers out of the array one at a time, set the record pointer equal to the number pulled out, and go right to the expense record-all without searching for an "E" in the date-field on the second pass.

Please note that any index approach demands random. disk hardware-tape is out, except for the most sophisticated systems. Note, too, that a complex index system (one using more than just a pointer to the last record used) is almost certainly going to require another file merely to hold the index records for pointing to closed, deleted, numbered or usable records in the master file. Confused? Well, you might be, at that

My preliminary programs in Alpha-Micro BASIC for our complete, new system contain one file whose sole purpose is to index records contained in four other files, all of which contain information on the same client. It can get rather hairy! . . . and all because you don't have, or want to improve upon, the IF END statement. I will be happy to assist any of you trying to implement these programs on your computer. Please, though, give me enough information about your

BASIC to do so, and include an

READ and WRITE

After reading your BASIC manual, you have probably come to the conclusion that the various READ and WRITE statements in these programs will not work in your system. Please, don't despair. Any disk or tape system worthy of the name will have some command to write information to a record and another to read data from that record. Just look under that section in your manual and modify the programs accordingly. The most common difference will be the lack of a record-pointer reference in the READ or WRITE statement itself. No problem. Leave it out and reference it earlier in the program.

It is unfortunate that no two implementations of BASIC are really identical. For example, the programs presented here will not run on any other large, mainframe computer, let alone on a microcomputer. But, if you know (or are informed about) what you need to look for, there should be little problem in adaptation.

Critical Comments

Most critical comments have already been made. I know that the programs as presented are far from the most sophisticated possible. I know that they both could be made more useful with a few rather minor changes.

For example, no provision is made for credits and payments. The programs assume one billing and one payment in full. For us, this is a valid assumption. If an hourly-billed client does not pay in full, he is in a past-due status and can easily be handled by hand billing. However, for many firms, this will not suffice. For these, the simple addition of several lines of code in both programs will take care of the problem. You could also use a separate file (BALFIL) (?) to keep track of the balances of each client.

Many readers will say that these programs are not structured. This is so true . . . sorry about that, really. Realize,

please, that these programs are the efforts of a novice programmer. Many of you will have suggestions for modifications. improvements and so on. Great! . . . this is how the use of micros will grow. But, please, let Kilobaud know, OK? Improvements, modifications, doing the same thing in a better way-all this and more will cause hobbyist and business use of micros to grow. Again, please, let Kilobaud in on it. Wayne et al will smile, you might make a heap of money and, best of all for me, I'll profit from any critical comment.

Tape

I have worked with this medium only in a limited way-any comments herein should be taken with that in mind. In any event, I see no reason why these programs, with some modification, should not work on a tape-storage system. As presented, the programs are serial in nature, anyway. However, I can imagine that the search for records would be a terribly time-consuming task. If you can stand that, give it a try if you have at least two tape drives.

- I suggest at least the following housekeeping programs and techniques.
- 1. The use of client numbers instead of names. This will simplify the tape system both as to comparison of records and ordering the records on a tape file.
- 2. Update and sort programs to keep search time down. You will need to have all records of a given client-project sequentially ordered on the tape.
- 3. A compression program to get rid of closed records. This is optional on disk, but almost mandatory on any tape system.

Disk: Support Programs

- 1. Backup-a simple copy pro-
- 2. Delete-to get rid of records already billed. This can be either soft (where a unique key is used to replace the searchkey) or hard (where the record is actually eliminated from the file).

3. Print-delete-a printout of all records deleted, before the actual deletion thereof: a copy of bills can serve this purpose, if HRSCAL is modified to delete the records it prints.

If you use client numbers, you should include in HOURS a check-digit routine to test for a valid number. Perhaps you would have use for another program (subroutine) to test for a duplicate number.

Security. If you modify the programs to show balances, then don't allow a client's record(s) to be closed out with an outstanding balance. Also, no credits (as contrasted to payments) should be allowed to any account without a security code. All this keeps operators honest.

Backup Files

I cannot stress too strongly the use of backup files. If you use these programs to any extent at all, you should make it a regular practice to copy the updated file onto another disk at regular intervals (i.e., daily, if there are many entries into the file each day). Then, if you bomb a file (and you will eventually), or if a disk goes bad for some reason, you will have the old one to turn to and only have to reenter a minimum of data to set things right. If you are going to offer a service to others, backup files are an absolute

Our firm pays lots of bucks because we insisted from the outset that a daily backup tape be made of our file-the extra CPU time is well spent. (Here, I'm talking about the main system: 1500 client records of 650 bytes each.) On five occasions to date, even with experienced operators, garbage has been written onto our disk file, totally destroying all the valuable data therein. It would have taken weeks to recreate our file by hand, if it could have been done at all. In each case, however, the computer center simply restored the data onto the disk by using the tape made

the night before. We lost about 20 entries that had to be reentered.

On one memorable night, an operator with, maybe, more troubles on his mind than brains in his head, not only wrote garbage (the University Alumni list) into our current disk file, he also compounded the error by writing that onto our backup tape, thus destroying any hope of reconstruction-except for one thing: We also require the making of an end-of-month tape, saved until another one is made 30 days later. With this, we were able to restore the file, and we only had to reenter ten or twelve days' entries.

This was really a small price to pay compared to a complete recreation of the file and all the transactions that were recorded therein for the past two years. (The University spent about five weeks or so reconstructing the Alumni file, by hand, after their only tape of that file had our data written

onto it in the same debacle-it was, to be sure, quite a night at the computer center.)

The moral of all this is obvious (especially if you are running a service for others): Make sure their files can be restored in the event of a goof or a system crash.

Summary

I hope this article has given you some food for thought, at least. These are working programs being used in my office to generate billing for which clients of mine respond with cash. None of these clients have given me any static about the novice nature of the programming-they have given me only money! Perhaps there is a lesson there.

I hope some of the ideas presented here, if not the specific programs, will assist you in your business or in selling a service to others who bill clients on an hourly basis. Let me, and Kilobaud, know how you come out.

TRS~80 TRS~80 MACHINE LANGUAGE **SOFTWARE**

AIR RAID: A REAL-TIME TRS-80 SHOOTING GALLERY! - \$14.95

AIR RAID is an arcade type game that takes full advantage of the TRS-80 machine AIR MAID is an arcade type game that takes full advantage of the TRS-80 machine language capabilities. Large and small airplanes fly across the screen at different altitudes. A ground based missile launcher is pointed and fired from the keyboard. After the missile is launched, its flight direction may be modified. Aircraft explode dramatically when hit, sometimes destroying other nearby planes! Score is tallied for each hit or miss, and the highest score is saved to be challenged by other players. Play ends when time runs out, but extra time may be earned with a high score. AIR RAID will provide hours of fun for you, and is a super demonstration program for entertaining friends! Runs in 4K.

MICROCHESS: PLAY CHESS AGAINST YOUR TRS-80 - \$19.95

MICHOCHESS plays chess at 3 levels of difficulty. Although it may not beat the Although It may not beat the chess masters, it does play an aggressive game and is not easily beaten. In addition to being great fun to play, it provides a useful and tireless opponent for practicing checkmates, learning openings, and for sharpening general playing skills. You may set up the board any way you wish. You can switch sides with the computer at any time. You can even make the computer play against itself! Written by Peter Jennings, MICROCHESS has held its own against much larger chess-playing computers. A truly unique program for the TRS-80! Runs in 4K.

RSL-1: GRAPHIC PATTERN DRAWING AND THE GAME OF LIPE - \$14.95

With RSL-1 you can draw graphic patterns on your display directly from the keyboard, or you can load patterns from cassette. The keyboard has a unique repeating function that will write a continuous line in eight vertical, horizontal, or diagonal directions! Patterns may be saved on tape, and four demonstration patterns are furnished on your RSI-1 cassette. After the pattern is entered, RSI-1 plays LIFE, a game of birth, growth and death of a colony of cells. RSI-1 will compute and display each generation for about 2 seconds, regardless of the pattern on the screen! Runs in 4K.

ESP-1: AN 8080 ASSEMBLER-EDITOR-MONITOR - \$29.95

ESP-1 is a resident operating system that lets you create, assemble, execute and debug programs using INTEL 8080 asembly language mnemonics. This excellent package, used for years by many 5-100 8080 owners, has been adapted by SMALL SYSTEM SOFTWARE to run on the TRS-80. With ESP-1 you may ENTER, EDIT, RENUMBER and ASSDEMIE Source files, READ and WRITE source or object code tapes, DISPLAY and EDIT memory, save, kill and display the SYMBOL TABLE, execute programs and insert BREAKFOINTS to aid in debugging your programs. ESP-1 has over 20 commands to exercise and control your TRS-80! For 16K or more.

RSM-1S: A MACHINE LANGUAGE MONITOR FOR THE TRS-80 - \$23.95

RSM-IS provides you with 22 commands with which you can interact directly with the Z-80 processor in your TRS-80. You will have direct access to all memory locations. You may examine your BASIC ROM's, test your RAM, enter and execute machine language programs, read and write machine language tapes, and much more!

symbolic dump command disassembles object code in memory and displays it as 2ilog standard 2-80 mnemonics! All relative addresses are computed and displayed. This is a great aid to understanding the operation of your TRS-80 software.

Memory may be displayed in HEX or either of two ASCII formats. Memory may be displayed in this or either of two Asili ottmets. Memory dan be BUTTED, MOVED, EXCHANGED, VERIFIED, FILLED, ZEROED or TESTED. All memory display commands may be stepped one line at a time with the space bar, or may be terminated by use of BREAK. Memory may be SEARCHED for one or two-byte codes. RSM-1S is a unique and superior monitor! Runs in 4k.

COMING NEXT MONTH - SMALL SYSTEM HARDWARE!!

SMALL SYSTEM SOFTWARE has developed a variety of hardware items that we use during our TRS-80 software development efforts. We will be offering the best of these products through our new subsidiary, SMALL SYSTEM BARDWARE. Among our first offerings will be:

An inexpensive software driven RS232 serial output port for printers. A parallel 1/0 board with 2 full 8-bit ports plus a status port. A PRDM/RAM board with an expanded RSM-15 monitor on 2708 proms.

Of course, all of our hardware products will be furnished with any required software and will also come with example programs for taking full advantage of their features!

OTHER TRS-80 PRODUCTS

RSM-1: \$17.95. Identical to RSM-1S, but without symbolic display command. LST-1: \$7.95. A disassembled listing of LEVEL-1 BASIC with some comments. SCM-1: \$4.95. A fully actailed schematic of the TRS-80 microcomputer. CVR-1: \$3.95. Quality dust covers in cloth-backed vinyl to protect your keyboard. Colors: Spanish Red, Antique Ivory, Rich Brown.

All software comes with LEVEL I and LEVEL II versions on the same cassette. Order yours today - Immediate delivery! (California residents add 6% sales tax).

* SMALL SYSTEM SOPTWARE * FOST OFFICE BOX 483 * NEMBURY PARK, CALIF. 91320 * S51 * SMALL SYSTEM SOPTWARE * POST OFFICE BOX 483 * NEMBURY PARK, CALIF. 91320 *

Troubleshooters' Guide

You're hesitant about tackling repair and interfacing problems? If so, this will point you in the proper direction and get you started.

Ralph Tenny P O Box 545 Richardson TX 75080

ne of the fascinating phenomena about computers is that they can do things-almost anythingautomatically, provided the machinery to accomplish a given task is available and can be run and controlled by electrical signals. All such computer-controlled machines are called peripherals, no matter what their function is. Most of us routinely use such peripherals as TTYs or TVTs, audio cassettes and printers. Depending on whether you bought a system or built kits, you spent various amounts of time getting those peripherals to work with your computer.

You were probably furnished detailed instructions for operating the TTY or TVT and cassette with your computer, and the necessary electrical connections (interface circuitry) were already designed and ready to use. Finally, it is almost certain that the software for your computer already had provisions to operate the peripherals necessary to make the computer functional. These things are necessary for any computer system-interface, software and "how to"-but

the information may not always be available when a peripheral made by one manufacturer is to be used with a computer from another manufacturer. In the case of surplus equipment such as a Baudot TTY, there may be no instructions or software available.

The Big Picture

Regardless of the circumstances, let's assume you are having trouble with a computer peripheral (otherwise why are you reading this?). The troubleshooting approach needed will vary with the type of computer and hardware that's involved.

The computers available to

will address either 32K or 64K

most hobbyists will be one of types-those with isolated, or accumulator, input/output (I/O) such as the 8080 and 2650, or those with memory-mapped I/O such as the 6800 and 6502. Accumulator I/O machines have special input and output instructions, while the memory-mapped computers use standard memory instructions such as LOAD and STORE to service both memory and peripherals. In order for this to happen, such peripherals are assigned memory addresses; this will limit the total amount of memory available. However, since most microcomputers

controllers are a bit easier to troubleshoot because their input signals (combinations of bits on the input lines) are less numerous than those for datahandling devices. Also, it is likely that the interface connections will be simpler for the controller than for the data peripheral. The final consideration will be software; detailed instructions must be available to enable the computer to produce the proper signals to drive any peripheral. Most manufacturers of hobbyist equipment furnish software for peripherals they produce. If surplus equipment is involved, there may be no software available

unless someone has also made

a kit available to interface the

machine to a microcomputer.

Note that if appropriate soft-

ware is available, it will depend

strictly upon a properly func-

tioning interface of a particular

design.

words of memory, it would take a lot of peripherals to make a dent in the available memory

The best troubleshooting method also depends upon which type of peripheral is involved-whether it is a device to input or output data or if it controls something. In general,

space!

Successful troubleshooting of computer peripherals requires careful study of the system-from microcomputer architecture through the mechanical and electrical details of the peripheral and interface. You are probably familiar with your computer, so let's begin with the peripheral, giving it a thorough inspection to be sure it is totally functional. Operate all controls, and supply electrical signals if appropriate. Proceed to the interface circuitry only if these tests are successful.

Be sure the interface is capable of reliably and safely producing all the signals needed by the peripheral. Relay contacts or semiconductor switches (power transistors, SCRs or Triacs) must be able to handle the voltages and currents involved. A stuck relay or defec-




Fig. 1. Baudot code timing.

| HEX CHARACTER | BAUDOT | HEX CHARACTER | BAUDOT | |
|-----------------|--------|---------------|--------|--|
| 0 | 01101 | 8 | 01100 | |
| 1 | 11101 | 9 | 00011 | |
| 2 | 11001 | A | 11000 | |
| 3 | 10000 | В | 10011 | |
| 4 | 01010 | C | 01110 | |
| 5 | 00001 | D | 10010 | |
| 6 | 10101 | E | 10000 | |
| 7 | 11100 | F | 10110 | |
| CARRIAGE RETURN | 00010 | LINE FEED | 01000 | |
| SPACE | 00100 | LETTERS | 11111 | |
| FIGURES | 11011 | | | |

Fig. 2. Chart of some Baudot codes.

tive Triac won't hack it—all systems must be GO! Power supplies must be able to handle the load. If the computer power supply is used, be sure there is reserve capacity and that the computer power bus isn't receiving power glitches caused by the peripheral.

Now, consider the software. Let's take the case where the software is for a different computer system. Break it down into modules so that only one peripheral operation at a time is addressed. Determine what changes must be made to perform the same function on your computer, and make changes as necessary. Finally, combine the modified modules to check out the entire system-computer port, interface and peripheral-in a simple loop or repetitive fashion that addresses all desired peripheral functions. At this point, you should have mastered the system well enough so you can create application software to make the peripheral do useful tasks as a part of the whole system.

Serial Data Testing

Now, let's examine an actual problem. My KIM-1 has software (monitor ROM) and an interface to drive an ASR-33 Teletype directly; but how about operating my Model 15 Baudot TTY? All I have is documentation for KIM and a service manual for the Model 15-no software and no interface circuitry. I want the Model 15 to serve only as a printer, so there is no need to interface the keyboard; KIM would drive the printer mechanism using whatever data I wish to feed it. The keyboard was useful in checking out the machine initially, but the interface will be much simpler if the keyboard is not involved.

The first step in planning this project is to understand how the machine works. The print mechanism operates when current through a selector magnet is interrupted in a certain code pattern. Fig. 1 is a timing diagram of the Baudot code format, and Fig. 2 is a chart of Baudot codes for the hexadec-

imal and TTY control characters needed. Note that a Baudot machine has no SHIFT key, but that it has LETters and FIGures keys. (The five-level code will select only 32 keys, but by arranging for numbers, symbols and punctuation marks to be uppercase—FIGures mode— the print set is expanded to 58 codes.)

Look again at Fig.1 and note that the Baudot code consists of a start bit, five code bits and an extra-length stop bit. That stop bit could be troublesome to make, so let's modify the code format as shown in Fig. 3-that is, substitute two regular-length stop bits for the longer one. Previously (Fig. 1), the character time was 163 ms; now it is 176 ms-only 8 percent slower. The resulting simplification of software and hardware makes the trade-off entirely acceptable.

Now, how can KIM drive the Model 15? KIM has a 20 mA current loop derived from a 5 V supply, which is entirely inadequate to switch the 60 mA current derived from the highvoltage supply of the Model 15 (Fig. 4). Of course, it is possible to add some external circuitry to adapt KIM to Model 15, but KIM's software is still a problem. KIM's lookup table is for hexadecimal to ASCII, and the self-adjusting timer, which produces the proper output bit rate, requires the keyboard for setup. It is easier to build a simple interface for the Model 15 and drive it from the standard KIM output lines.

Fig. 5 is a simple CMOS cir-

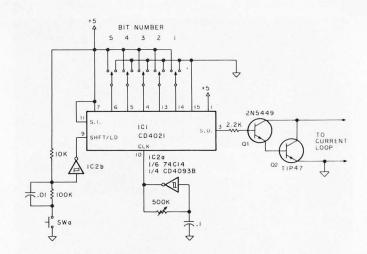


Fig. 5. Parallel-to-serial driver for Model 15 TTY (with test switches).

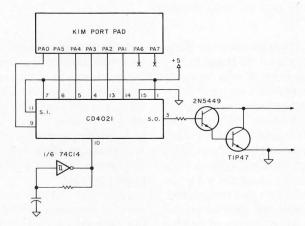


Fig. 6. Completed Model 15 interface.

cuit that accepts parallel data and will shift it out to the Model 15 through two transistors. Q1 matches the CMOS output to the higher drive requirements of Q2, which is a high-voltage unit to switch the current loop. IC1 is a shift register, and IC2A is a free-running oscillator with a period of 22 ms. IC2B is a pulse generator that causes

the shift register to load data from the five input switches.

A cycle of operation works this way: push-button switch SwA trips IC2B, and data is loaded into IC1, including a 1 on pins 1 and 7 and 0 on pin 15. As soon as the load pulse terminates, data is ready to shift out as clocked by IC1A. When the 0 loaded by pin 15 reaches the output, Q1 and Q2 turn off, producing a start pulse for the Model 15. As the remainder of the data is shifted out. 1s are shifted in via pin 11, the serial input pin. Thus, after loaded data is shifted out, Q1 and Q2 remain turned on, waiting for the next data to be loaded.

The proper test method for this interface is to set the switches to the Baudot codes for R (01010) and Y (10101) alternately. Carefully adjust the frequency of IC2A until proper operation is obtained, then try other characters. The circuit in



Fig. 3. Modified Baudot code timing.

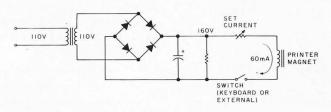


Fig. 4. Common Model 15 current-loop supply.

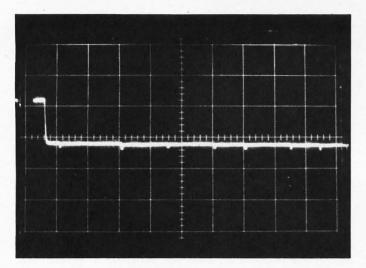


Photo 1. Instruction (LDA 8000) causes Address Bit A15 to go high as the instruction is executed; this defines a unique strobe to furnish sync for an oscilloscope.

Fig. 5 has now become a tested interface for the Model 15.

Although it was designed with KIM in mind, it can easily be adapted to any computer. Fig. 6 shows the KIM output port attached to the interface; note that PAO (least significant bit of the port) replaces IC2B. Data can be written out to the port on pins PA1 through PA5, and the PA0 can be toggled (turned on and off) to load the data.

Software to operate the interface can take many forms, depending upon how the printer needs to work with a main program. For checkout, a short test routine is best. Fig. 7 is a flowchart and Fig. 8 is the KIM program. Note how the software is intimately related to the hardware.

Begin with the pin assignments of the output port: PA0 is the least significant bit (LSB), so it can be toggled with INCre-

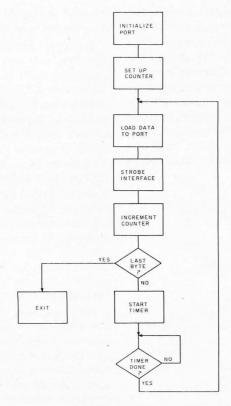


Fig. 7. Flowchart for test program.

| Label | Op. | Arg. | Comments |
|---------------|-----|-----------|--------------------------------------|
| TEST | LDA | #\$3F | Select mask for port. |
| | STA | PADD | Set mask in port control register. |
| | LDX | #\$00 | Zero index register as counter. |
| PRINT | LDA | BUFFER, X | Get first data byte. |
| | STA | PAD | Set data in port. |
| STROBE | INC | PAD | Toggle PA0 to load data |
| | DEC | PAD | into interface. |
| | INX | | Set index for next data byte. |
| | CPX | END | Test for last byte. |
| | BEQ | OUT | Done? If so, exit. |
| WAIT | LDA | #\$F0 | Set time in |
| | STA | TIMER | programmable timer. |
| TIME | BIT | TIMER | Timer done? |
| | BPL | TIME | No, go back and check again. |
| | BMI | PRINT | Yes, print again. |
| OUT | BRK | | Stop computer after printing last by |

Fig. 8. Short test program writes data from location BUFFER to interface.

ment and DECrement instructions. The data buffer has the organization shown in Fig. 9, where X stands for "don't care," or unused, bits. Bit 0 (LSB) is always 0, so the load/shift pin of IC1 is always low for shifting until new data is to be loaded.

Let's follow through the program after a brief comment on parts of the setup. At label TEST, 3F is loaded to the port. Ones loaded into the Data Direction register (PADD) turn the corresponding port lines into outputs, while 0s create inputs. So 3F makes bits PA0 through PA5 outputs as reguired for the interface. Output data is stored at a group of addresses named BUFFER, and the location named END contains data specifying how many words of data BUFFER contains.

The location named TIMER is a programmable timer that sets bit PB7 low when time is up. So, when the progam is entered at TEST, the port is set up and register X is zeroed to make a counter. Data is loaded at PRINT, stored, and then IC1 is loaded by STROBE. Register X is incremented and tested; the routine at WAIT marks time until IC1 completes a print cycle.

If the last byte has been printed, the BRK instruction at OUT stops the computer. By now, it is even more apparent that software and hardware must work in exact harmony if any computer-controlled task is to be successfully completed!

The example above may seem contrived and simple, but it illustrates the most important points about debugging peripherals and their interface circuitry: Never try to debug malfunctioning equipment with an applications program. Always break up the task into as many modules as possible. It's OK to fire up a peripheral with furnished software if and only if you are dealing with a turnkey package in which the software and hardware were created for each other. Then if it doesn't run, follow the suggestions and examples above.

Let's return to the point where manual and electrical testing of a peripheral seems to prove the mechanism functional. I will assume that you understand the signals and power that must be furnished by the interface. If you don't, stop until you find out! If the interface furnishes power, substitute a similar load and write a

| × | × | BIT 5 | BIT 4 | BIT 3 | BIT 2 | BITI | (|
|---|---|-------|-------|-------|-------|------|---|
| | × | 811.5 | B11 4 | B11 3 | BITZ | BILL | |

Fig. 9. Data buffer organization for loading Model 15 interface.

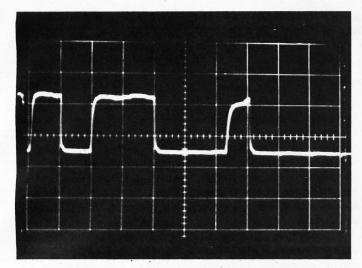


Photo 2. Using the sync shown in Photo 1, Data Bit 2 is examined for proper data activity and timing (see text for details).

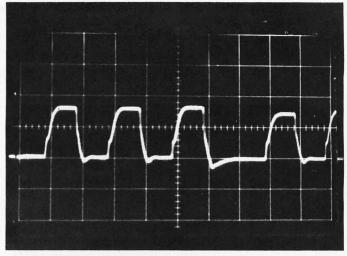


Photo 3. Heavy capacitative loading of buffered address line produces slow-rising leading edges and undershoot on trailing edges.

short program that turns on the power and then halts the computer (or loops while waiting for a Reset signal). Measure the voltage across the substituted load to be certain power is really being delivered. Check for switch closures with an ohmmeter. Do each function of the interface the same way until it all checks out.

Scope Techniques

Data transfers or special signal patterns are harder to check. The neat way to do this is to use a digital analyzer-about \$2K worth. Not too many of us have one, so there must be another way. The next easiest way to troubleshoot is to use an oscilloscope. Due to the short time any particular word of data stays on the data bus-just one part of a machine cycle, which may be less than a microsecond-the scope must have a triggered sweep. Even then, it is difficult to find a trigger signal that trig-

gers only when (or just before) the data to be checked appears on the data bus. It is sometimes possible to make the computer generate a unique strobe shortly before outputting a data byte. For example, Fig. 10 is a short program that generates a unique address (LDA 8000 sets bit A15 high) and then moves data to the address bus, generates a short delay and repeats. When the scope is triggered by bit A15 going high, it is possible to examine the data bus bit by bit and verify that the proper data is appearing.

Photo 1 shows bit A15 of the address bus going high at the first statement of the program in Fig. 10 (LDA #8000). When this signal is used as a trigger for the scope, it is possible to examine the data bus and watch for the data to appear. This is shown in Photo 2. The exact details of what follows will be pertinent only to the MCS 6502, which is the processor used in the KIM-1 micro-

| Label | Op. | Arg. | Comments |
|-------|------------|--------|--|
| TRIG | LDA | \$8000 | Set address bit A15 high as strobe. |
| | LDA | #\$A5 | Get data for output. |
| | STA | PORT | Send data to port. |
| | LDX | #\$F0 | Set up index register as counter. |
| COUNT | DEX | | Decrement counter. |
| | BNE | COUNT | Loop back if counter not zero. |
| | BEQ | TRIG | Start over after counter reaches zero. |

Fig. 10. Short program generates scope trigger to verify data movement.

computer, and a similar analysis will have to be made for each different uP.

In Photos 1 and 2, the timebase speed is such that one machine cycle takes one horizontal division on the scope face. Keep that in mind, and it will then be possible to analyze when the data should appear on the data bus. The next step is to count machine cycles through the program (see Example 1).

Since the absolute address appears only in the last cycle of

the first instruction, Photo 1 shows that ending cycle. Counting forward six more cycles (six divisions on the scope graticule in Photo 2), we see that a data bit comes high in that cycle. The subject of Photo 2 is Data Bit line 2, which should be a 1 according to the data loaded in instruction 2. The bit pattern with a data byte of A5 is shown in Example 2. Thus we see that Data Bit 2 should be a 1; checking other bits on the data bus showed that the correct data was appearing at each pin.

To summarize the procedure for checking data (or address) bit on computer bus lines, begin by creating a software strobe or other means of sync for the scope. Set the scope time base so that one machine cycle occupies one horizontal division of the scope graticule. Analyze the program to determine the number of machine cycles required to bring the data to the bus; remember that this analysis depends upon

Instruction Type Instruction Cycles 1. LDA \$8000 Load accumulator absolute 4 (use last cycle only)

- 1. LDA \$8000 Load accumulator absolute
 2. LDA #\$A5 Load accumulator immediate
- 3. STA Port Store accumulator absolute

ute 4

2

Example 1.

 Data Bit
 DB7
 DB6
 DB5
 DB4
 DB3
 DB2
 DB1
 DB0

 Binary value
 1
 0
 1
 0
 1
 0
 1

Example 2.

| Addr | ess lines | A15 | A14 | A13 | A12 | A11 | A10 | A9 | A8 | A7 | A6 | A5 | A4 | A3 | A2 | A1 | A0 |
|---------|-----------|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|
| Address | 10AF | X | X | 0 | N | X | 0 | 0 | X | N | 0 | N | 0 | N | N | N | N |
| | 0F36 | X | X | 0 | 0 | N | N | N | N | 0 | 0 | N | N | 0 | N | N | 0 |
| | 3668 | X | X | N | N | 0 | N | N | 0 | 0 | N | N | 0 | N | 0 | 0 | X |

Example 3.

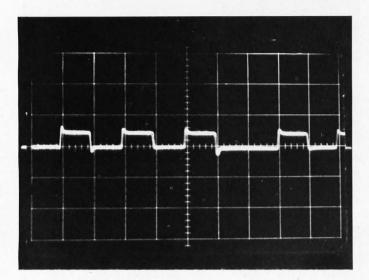


Photo 4. High resistive loading (partial short to ground) reduces address line amplitude to below logic 0 levels.




Fig. 11. Selective decoding gives unique event to check program branching.

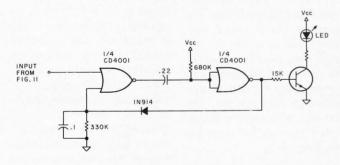


Fig. 12. Simple CMOS one-shot makes LED blink slowly from repetitive triggers.

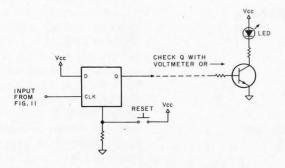


Fig. 13. Flip-flop records infrequent triggers.

thorough knowledge of the machine timing and the number of cycles each instruction takes. Finally, determine where (on the scope graticule) the data should appear, and look at each line on the bus to verify correct operation.

Photo 3 shows a buffered address line that has heavy capacitive loading. Note that rising edges are heavily rounded, and that falling edges have undershoot with a slow recovery. Photo 4 shows the same address line with a heavy resistive load; note that the amplitude is drastically reduced and obviously will not meet the voltage levels required to operate either TTL or MOS circuits. Any device driven by the line shown in Photo 3 will probably show erratic or false address decoding; the waveform of Photo 4 will probably cause a driven device to consider this address bit a 0 at all times. In either case, faulty addressing will be the symptom and a scope would be needed for proper diagnosis.

Other Tools

It is often possible to use ingenuity and planning to do much troubleshooting with a voltmeter or other static indicator. Also, if your system has a front panel with address switches and status lights, the pattern on the lights may offer helpful hints. If data fails to appear at the expected place, it can be very helpful to know that the subroutine that moves the data wasn't called by the main program. How? If the subroutine happens to be in a littleused page of memory, sometimes it is possible to see the address LEDs on the front panel flicker as the subroutine is accessed. A program loop can be used to enhance the brightness of the LEDs.

In a similar vein, checking certain address bits with a logic probe (a "pulse catching"

feature is necessary) can reveal that the computer is accessing certain parts of memory. If no single unique address bit is involved, a simple two-IC circuit (Fig. 11) will decode enough of the address to generate a unique pulse each time the memory accesses the decoded address. This pulse will then trigger the logic probe so that it blinks. If a logic probe is not available, hook up a one-shot (Fig. 12), which will make a blinking light, and trigger it from the decoder of Fig. 11.

The decoder of Fig. 11 works this way: It can decode 14 address lines, but the choice of these lines will depend both on the address to be decoded and on other parts of the program with similar addresses to be excluded. Example 3 shows some hex addresses and possible decoding connection choices. N represents a NAND input line, O is a NOR connection, and X indicates lines left open.

The object is to make the best use of the available gate inputs so that only addresses within the subroutine are decoded, while no addresses in the main program are decoded. This will ensure that the decoder will develop an output only when the subroutine is addressed.

Finally, a simple flip-flop (Fig. 13) can be triggered by the address decoder. This is particularly useful for checking on events that happen infrequently, such as monitoring switch closures. Select an address within the program section that reacts to the switch closure; then close and open the switch. If the flip-flop is set by the decoder, all is well. Use a voltmeter to check the Q output of the flip-flop, or use a transistor driver to turn on an LED. Check both states-be sure the flipflop is set by the computer's response to the switch closure and that it stays reset as long as the switch stays open.

SPINTERMT.M.

The terminal with competition-crushing advantages.



Faster

at 55 characters per second.

More characters-

up to 128 on an interchangeable print thimble.

Longer life

with a print thimble that gives over 30,000,000 impressions.

Quieter

at 60 dB with hinged covers on, and 67 dB with covers off.

PLUS Proportional Spacing.

Many standard features enable SPINTERM to outperform other printers in this range of capabilities.

For instance, the forms length control provides 99 choices of lines. You can select 6 or 8 lines per inch. You have 6 baud rates at 110, 150, 200, 300, 600 and 1200. Industry standard RS-232 interfaces contain a built-in self test. The quality of print can't be beat for it's uniform impression, even through an original and 5 copies. The numeric keypad is standard, along with full ASCII keyboard. You have a choice of ribbon styles, each in a snap-on cartridge. And we can supply an optional full word processing software package.

We've barely scratched the surface of outstanding features which are standard on the SPINTERM. So write us for complete details.


micro computer devices inc.

960 E. Orangethorpe, Bldg. F Anaheim, California 92801 Telephone (714) 992-2270



"Innovators to the Microcomputer Industry"

Metric-American Conversion Program

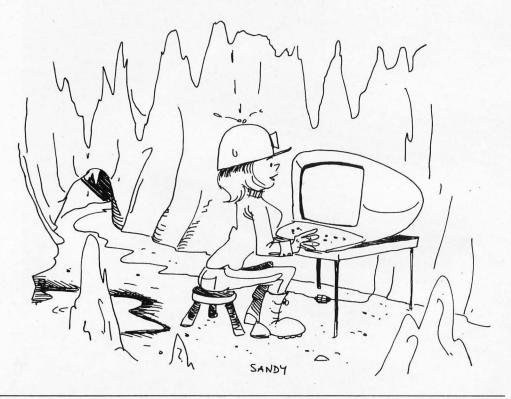

With September comes the opening of schools. Here's a program to help students with the inevitable: learning the metric system.

Mickey Ferguson P. O. Box 708 Trenton GA 30752

'II never understand women! If I live to be 100, I'll just never understand women. Women in general are difficult, but the lady to whom I'm married is impossible! Let me tell you a little about her. Foxy is a caver. Now, cavers are really strange people - I mean really strange. Stranger even than ham radio operators or computer hobbyists! (Rumor has it that, as a body, their most notable accomplishment is the origination of the EAT MORE POSSUM bumper

sticker.) I would even go so far as to say they're addicts! Get them too far into the daylight and away from bat guano and they start having withdrawal pains! When they venture out from underground, they do many weird things to support their caving habits.

Some cavers are college professors, others run companies such as Western Electric, while others are directly responsible for putting men on the moon. I've also heard of one who writes "cookbooks" (like TTL, CMOS, & TV Typewriter Cookbooks). Well, Foxy was a professional computer person for a number of years and has

taught me the little I know about programming. But, above all, Foxy is a caver. If you happen to see a short, blonde lady wearing mountaineering boots, grubby jeans, a T-shirt with pictures of bats all over the back, and who has a furry little rug-rat (Yorkshire Terrier) or two in tow; it's probably her.

Well, I've learned to live in a world of Bluewater (a rope), Break-bar racks (thing-amajigs for going down rope), jumars (whatsits for going back up rope), carbide lights, occasional meals that smell like carbide, etc. I've even learned to live with Land Rovers full of total strangers appearing at our front door at

three in the morning looking for a place to "crash" for the night. Trenton, Georgia, may not be the crossroads of the world, but it is the heart of cave country in the Southeast. In fact, that's why we live here, and this does tend to make life interesting. You simply never know just who will come visiting. Recently, I had the pleasure of demonstrating my M6800 system to a computer PhD from one of our large universities who had never even heard of microprocessors! I still chuckle when I think of him standing there in unabashed, openmouthed amazement at the small size and vast power of the system.

The other day, I walked into our study, where Foxy was busily preoccupied with her Great Unfinished Masterpiece. You see, she is writing a book for the National Speleological Society (the national U.S. caving club). The book, as Johnny Carson might say, contains everything that anyone could ever hope to know about descending a rope. Just what good it does you to know that is totally beyond me. So, there she sat, surrounded by mountains of paper, a pencil between her teeth, one of our rug-rats on her lap, punching away angrily on a pocket calculator, and muttering softly to herself.

"Hi, darling!" said I.

"Wha? Oh, G'way. Um bithy," she replied.

"Take the pencil out of your mouth, dear," I requested.

"Oh, hon, stick BASIC in the machine and write me a little program to convert anything to anything," she said.

"Huh!?!" I responded, preparing to make a quick exit.

To make a long story short, after several more minutes of this intellectually stimulating discourse, I discovered that she had been trying to do a lot of conversions of American weights and measures to the metric variety, making a lot of mis-

takes in the process. After all, her book is a heavy scientific (?) work that she feels deserves all references to weights and measures in both systems. I'll never understand women! There she sits, this lady who has forgotten more about computer programming than I'll probably ever know, pounding away on an old pocket calculator attempting to process a large volume of data with a perfectly good computer across the room doing absolutely nothing! Now she wants me to write a program for her that she could do better and faster herself. As I stood pondering all of this, she kept prodding me to do it. I could only think of one excuse: I told her that I was late for an appointment at the local massage parlor. She quickly pointed out, however, that we don't have a local massage parlor. My mind went blank: I had lost and knew it.

The Objectives

I set about the task of writing the Metric-American Conversion program with a few thoughts firmly in mind. First, I wanted to write it with a structured approach, as I've been reading so much about in Kilobaud. By doing it this way, it should be easy for anyone to understand (and, if desired, modify) just by reading the listing. Additionally, it should run in almost any BASIC with little or no modification. This should make it easy to write an article about the program, which (maybe, just maybe) Wayne would be willing enough to buy for Kilobaud or 73. (I usually write programs with this in mind because I'm trying to save enough for a floppy disk system.) The other thing I had in mind was that it should be as idiot-proof as possible - because Foxy would be using it! (And, if I don't explain the preceding sentence, I'll be sleeping in the quest room for the next several months!) You see, when Foxy does anything

```
0003 REM *
                           BY
0004 REM *
                    MICKEY E. FERGUSON
0005 REM **************
0006 R.E.M.
0010 GOSUB 230
0020 PRINT TAB (10); "METRIC-AMERICAN CONVERSION"
0030 PRINT
0040 GOSUB 270
0050 PRINT TAB(5);"1... LENGTH"
0060 PRINT TAB(5);"2... AREA"
0070 PRINT TAB(5);"3... VOLUME"
0080 PRINT TAB(5);"4... WEIGHT"
0090 PRINT TAB(5); "5... TEMPERATURE"
0100 PRINT
0110 PRINT "PLEASE INPUT THE 'NUMBER' OF YOUR CHOICE."
0120 PRINT TAB(5);"(INPUT '99' TO END)"
0130 INPUT X
0140 IF X<1 THEN 10
0150 IF X=99 THEN 9999
0160 IF X > 5 THEN 10
0170 ON INT(X) GOSUB 290, 730, 1170, 1610, 2050
0180 PRINT
0190 PRINT "HAVE YOU FINISHED
0200 INPUT X
0210 IF X=1 THEN 9999
0220 GOTO 10
0225 REM ***THE FOLLOWING SUBROUTINE ERASES THE SCREEN ON MY TERMINAL***
0226 REM ***IT DOES THIS BY PRINTING LINEFEEDS & CARRIAGE RETURNS***
0230 FOR X=1 TO 20
0240 PRINT
0250 NEXT X
0260 RETURN
0265 REM ***THE FOLLOWING SUBROUTINE PRINTS A STRING THAT IS USED IN***
0266 REM ***MANY DIFFERENT PLACES IN THE PROGRAM**
0270 PRINT "DO YOU WANT TO CONVERT:"
0280 RETURN
0285 REM *** LINE 290 IS THE ENTRY OF LENGTH CONVERSION SUBROUTINE ***
0290 GOSUB 230
0300 PRINT TAB(10);"LENGTH CONVERSION"
0310 PRINT
0320 GOSUB 270
0330 PRINT TAB(5);"1... KILOMETERS TO MILES"
0340 PRINT TAB(5);"2... METERS TO FEET"
0350 PRINT TAB(5);"3... CENTIMETERS TO INCHES"
0360 PRINT TAB(5);"4... MILES TO KILOMETERS"
0370 PRINT TAB(5);"5... FEET TO METERS"
0380 PRINT TAB(5); "6... INCHES TO CENTIMETERS"
0390 INPUT X
0400 IF X<1 THEN 290
0410 IF X > 6 THEN 290
0420 ON INT(X) GOTO 430,480,530,580,630,680
0430 PRINT "KILOMETERS";
0440 INPUT K
0450 M=K/1.6094319
0460 PRINT K; "KILOMETERS = ;M; "MILES."
0470 GOTO 720
0480 PRINT "METERS";
0490 INPUT M
0500 F=M/.3048006
0510 PRINT M: "METERS = ";F:"FEET."
0520 GOTO 720
0530 PRINT "CENTIMETERS";
0540 INPUT C
0550 I=C/2.540005
0560 PRINT C;"CENTIMETERS = ";I;"INCHES."
0570 GOTO 720
0580 PRINT "MILES";
0590 INPUT M
0600 K=M*1.6094319
0610 PRINT M;"MILES = ";K;"KILOMETERS."
0620 GOTO 720
0630 PRINT "FEET";
0640 INPUT F
0650 M=F*.3048006
0660 PRINT F; "FEET = "; M"METERS."
0670 GOTO 720
680 PRINT "INCHES";
0690 INPUT I
0700 C=I*2.540005
0710 PRINT I; "INCHES = "; C"CENTIMETERS."
0720 RETURN
0725 REM *** LINE 730 IS THE ENTRY OF THE AREA CONVERSION SUBROUTINE ** *
0730 GOSUB 230
0740 PRINT TAB(10); "AREA CONVERSION"
0750 PRINT
0760 GOSUB 270
0770 PRINT TAB (5);"1... SQ KILOMETERS TO SQ MILES"
0780 PRINT TAB(5);"2... SQ METERS TO SQ FEET
```

0001 REM **************************

0002 REM * METRIC-AMERICAN CONVERSION PROGRAM *

```
0790 PRINT TAB(5);"3... SQ CENTIMETERS TO SQ INCHES"
0800 PRINT TAB(5);"4... SQ MILES TO SQ KILOMETERS"
0810 PRINT TAB(5);"5... SQ FEET TO SQ METERS"
0820 PRINT TAB(5); "6... SQ INCHES TO SQ CENTIMETERS"
0830 INPUT X
0840 IF X<1 THEN 730
0850 IF X > 6 THEN 730
0860 ON INT(X) GOTO 870, 920,970,1020,1070,1120
0870 PRINT "SQ KILOMETERS";
0880 INPUT K
0890 \text{ M} = \text{K}/2.5899985
0900 PRINT K;"SQ KILOMETERS = ";M;"SQ MILES"
0910 GOTO 1160
0920 PRINT "SQ METERS";
0930 INPUT M
0940 F = M/.0929034
0950 PRINT M;"SQ METERS = ";F;"SQ FEET"
0960 GOTO 1160
0970 PRINT "SQ CENTIMETERS";
0980 INPUT C
0990 I = C/6.451626
1000 PRINT C, "SQ CENTIMETERS = ";I; "SQ INCHES"
1010 GOTO 1160
1020 PRINT "SQ MILES";
1030 INPUT M
1040 \text{ K} = M*2.5899985
1050 PRINT M;"SQ MILES = ";K;"SQ KILOMETERS"
1060 GOTO 1160
1070 PRINT "SQ FEET";
1080 INPUT F
1090 M = F*.0929034
1100 PRINT F;"SQ FEET = ";M;"SQ METERS"
1110 GOTO 1160
1120 PRINT "SQ INCHES";
1130 INPUT I
1140 \text{ C} = I*6.451626
1150 PRINT I; "SQ INCHES = "; C; "SQ CENTIMETERS"
1160 RETURN
1165 REM ***LINE 1170 IS THE ENTRY OF THE VOLUME CONVERSION SUBROUTINE***
1170 GOSUB 230
1180 PRINT TAB(10); "VOLUME CONVERSION"
1190 PRINT
1200 GOSUB 270
1210 PRINT TAB(5);"1... CUBIC CENTIMETERS TO CUBIC INCHES"
1220 PRINT TAB(5);"2... CUBIC METERS TO CUBIC FEET"
1230 PRINT TAB(5);"3... LITERS TO GALLONS"
1240 PRINT TAB(5); "4... CUBIC INCHES TO CUBIC CENTIMETERS" 1250 PRINT TAB(5); "5... CUBIC FEET TO CUBIC METERS"
1260 PRINT TAB(5);"6... GALLONS TO LITERS"
1270 INPUT X
1280 IF X<1 THEN 1170
1290 IF X > 6 THEN 1170
1300 ON INT(X)) GOTO 1310,1360,1410,1460,1510,1560
1310 PRINT "CUBIC CENTIMETERS";
1320 INPUT C
1330 I = C/16.387156
1340 PRINT C; "CUBIC CENTIMETERS = ";I; "CUBIC INCHES"
1350 GOTO 1600
1360 PRINT "CUBIC METERS";
1370 INPUT M
1380 F = M/.028317
1390 PRINT M;"CUBIC METERS = ";F;"CUBIC FEET"
1400 GOTO 1600
1410 PRINT "LITERS";
1420 INPUT L
1430 G = L/3.785332
1440 PRINT L;"LITERS = ";G;"GALLONS"
1450 GOTO 1600
1460 PRINT "CUBIC INCHES":
1470 INPUT I
1480 C = I*16.387156
1490 PRINT I; "CUBIC INCHES = "; C; "CUBIC CENTIMETERS"
1500 GOTO 1600
1510 PRINT "CUBIC FEET";
1520 INPUT F
1530 M = F*.028317
1540 PRINT F;"CUBIC FEET = ";M;"CUBIC METERS"
1550 GOTO 1600
1560 PRINT "GALLONS";
1570 INPUT G
1580 L = G*3.785332
1590 PRINT G; "GALLONS = ";L; "LITERS"
1600 RETURN
1605 REM ***LINE 1610 IS THE ENTRY OF THE WEIGHT CONVERSION SUBROUTINE***
1610 GOSUB 230
1620 PRINT TAB(10); "WEIGHT CONVERSION"
1630 PRINT
1640 GOSUB 270
1650 PRINT TAB(5);"1... GRAMS TO OUNCES"
1660 PRINT TAB(5);"2. . . KILOGRAMS TO POUNDS"
1670 PRINT TAB(5);"3... METRIC TONS TO TONS"
```

sitting down, she has at least one rug-rat in her lap. Rugrats are funny little animals. They don't ask for attention; they demand it! They will do strange things when you least expect it, like standing on your terminal's keyboard. So, our programs have to be rugrat proof. Whew!

I think I've succeeded rather well in meeting my objectives with this program (especially if Kilobaud does buy this effort of mine). Although the Metric-American Conversion program looks rather long, it will run in a 12K system when used with SWTPC 8K BASIC - or even less if you leave out the REM statements. (REM does mean remove, doesn't it?) SWTPC 4K BASIC will also run it with no modification, and so should whatever BASIC you're using (assuming it has floating point arithmetic). The only things in the program that might cause you a spot of bother are the ON . . . GOTO and ON ... GOSUB statements. In some implementations of BASIC, these will have to be changed to GOTO ... OF and GOSUB ... OF in order for the program to run properly.

The Program

The Metic-American Conversion program can be broken down into several subprograms (which are written as subroutines) that actually handle all of the conversion. These subprograms are tied together by a very simple control program that is written as a loop. I'm not too good at hieroglyphics (flowcharts) so I'll try to give you a basic outline of how the program works.

First, the control loop:

- I. Clear screen on CRT.
- 2. Print a list of available conversion routines for the human.
- 3. Get an input from the human.
- 4. If input is invalid, go to #1 above.
- 5. If input is valid, go to

electronic components

One-Stop im-pak Component Center

AUTHORIZED DEALERS

ALABAMA Cropwell ALASKA Anchorage ARIZONA

Fountain Hills Tempe Sierra Vista Yuma CALIFORNIA

Relifiow Berkeley Brea Cypress El Monte Fontana Fullerton Glendale Lake Tahoe, South Long Beach Mission Viejo Modesto Monterey Oceanside Palmdale Palo Alto Pasadena Riverside Sacramento Sacramento Sacramento

San Bernardino San Diego San Diego San Fernando San Francisco San Francisco San Jose San Luis Obispo San Rafael Santa Barbara Santa Cruz Santa Maria Santa Monica Sunnyvale Torrance Vallejo Van Nuys Ventura Walnut Creek Westminster Whittier COLORADO

Steamboat Springs
CONNECTICUT FLORIDA Ft. Lauderdale Gainesville Lakeland Orlando Tampa Tampa GEORGIA HAWAII Honolulu IDAHO

Boise Caldwell Idaho Falls ILLINOIS Carbondale Evanston Granite City Groveland Mount Prospect Niles Oak Park Rockford East Chicago Hammond IOWA Clinton

Davenport

KANSAS

Tucker Bros. Lafavette Radio Electronics

Electronics Corp. of Alaska

Jim's Audio & Stereo Repair P & C Communications Computerworld Inc B & S Electronics

Earl's Hobby Shop

Al Lasher Electronics Century Electronics SCR Electronics Kimball & Stark Fontana Electronics
Orvac Electronics Inc.
Eagle Electronics CalPine Electronics
Consumer Electronics
Scott Radio Supply Inc. Tower Electronics Corp. Computer Magic Computer Magic Zackit Electronic Center Radio Shack A.S.C. Palmdale Zack Electronics Dow Radio Inc. Computer Center Heathkit Electronic Center The Radio Place Zackit Inland Computer & Electronics J & H Outlet Store Radio Shack A.S.C. Mira Mesa Radio-Tronics Inc. San Fernando Electronics Zack Electronics

Zenith Distributing Corp. Quement Electronics Mid-State Electronic Supply Electronics Plus Lombard Electronics Santa Cruz Electronics
Caps Electronics
Mission Control Sunnyvale Electronics SE Electronics Zackit Thrifty Electronics Supply Lombard's Electronics Inc. Byte Shop of Walnut Creek JK Electronics D & S Electronics

Whittier Electronics Co. Com Co Electronics Norm's TV & Electronics

Bridgeport Computer

Computers For You Lafayette Radio Lakeland Specialty Electronics Altair Computer Center AMF Electronics Microcomputer Systems

Atlanta Computer Mart

Delcoms Hawaii Integrated Circuit Supply

> Custom Electronics A-Gem Supply Inc. Audiotronics

Lafayette Radio Itty Bitty Machine Co. Tri-State Electronic Corp. Computer Systems Center Moyer Electronics Tri-State Electronic Corp. Computer Land Spectronics Inc. Imperial Computer Systems
Data Domain

Acro Electronics Corp Quantum Computer Works

Bridge Elec. Computer Center Computer Store of Davenport Electronix Limited

Electronic Surplus Sales

KANSAS (Continued)

MARYLAND

Rockville Silver Spring

North Adams

Waltham Worcester MICHIGAN

Ann Arboi

Grand Rapids

Lansing Mt. Clemens

Flint

Baltimore

La Vale

Towson

Communications Specialties Ltd. Manhattan Wichita Amateur Radio Equipment Company KENTUCKY


Radio-Electronic Equipment Co. LOUISIANA

Davis Electronics Supply Co

Computer Workshop of Baltimore Everything Electronics J & M Electronics Computer Workshop
Computers Etc.
Baynesville Electronic Inc. Computers Etc. MASSACHUSETTS Medford

Tufts Electronics Electronics Supply Center Computer Mart Inc. RM Electronics Inc.

Airway Electronic Communications Hobby Electronic Center Micro Computer World Fulton Radio Supply Co. The Computer Store

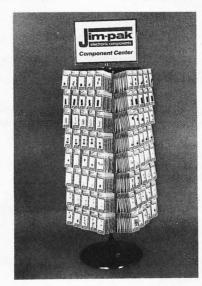

MINNESOTA Duluth

Eagan Hopkins St. Paul MISSOURI El Dorado Springs Florissant Parkville

MONTANA Billings

Bozeman **NEBRASKA**

Lincoln North Platte NEVADA Las Vegas NEW JERSEY Bricktown Cherry Hill Hoboken

Paterson Pompton Lake Ramsey

NEW YORK Kingston New York

Northwest Radio of Duluth Computer Room Inc. Heathkit Electronic Center Heathkit Electronic Center

> Beckman Electronics Computer Country Computer Workshop of Kansas City

Conley Radio Supply Electronic Service & Distributing

Altair Computer Center Scott Radio Supply Corp. Omaha Computer Store

Century 23

A. R.S. Communications Services Radio Shack Associate Store The Computer Emporium Hoboken Computer Works All-tronics Computer Corner

of New Jersey Typetronic Computer Store

Fort Orange Electronics Greylock Electronics Computer Mart of New York

NEW YORK (Continued)

Rochester Troy Utica White Plains NORTH CAROLINA

Durham Greensboro

NORTH DAKOTA

OHIO Bucyrus Cincinnati Columbus Dayton

OKLAHOMA Guymon Oklahoma City

OREGON

Coos Bay Medford Ontario Portland PENNSYLVANIA

Drexel Hill Erie Hershey

Murraysville Phoenixville Pittsburgh

Wilkesbare RHODE ISLAND Cranston Pawtucket SOUTH CAROLINA North Charleston

TENNESSEE Chattanoog Clarksville Knoxville Memphis Memphis Oak Ridge

TEXAS Amarillo Dallas Houston Houston San Antonio

VIRGINIA Alexandria Alexandria Alexandria Charlottesville Hampton Richmond Roanoke Springfield

WASHINGTON Kennewick Longview Pasco Richland Seattle Seattle

WEST VIRGINIA Morgantown Morgantown Ripley Wheeling

CANADA Alberta (Calgary) Ontario (Williowdale) Quebec (Montreal)

PANAMA Panama City Panama City

FRANCE

SINGAPORE

Com-Tech Electronics 2001 Microsystems Trojan Electronics Am-Com Electronics The Computer Corner Hirsch Sales Co.

Futureworld Byte Shop Byte Shop of Raleigh

The Computer Company

Mead Electronics Digital Design Heathkit Electronic Center Altair Computer Center Universal Amateur Radio

> Sound Service Bits, Bytes & Micros High Technology

Oregon Ham Sales Herrick Electronix Portland Radio Supply Miller Electronics Portland Radio Supply

Kass Electronic Distributors Kass Electronic Distributors
Warren Radio
Microcomputer Systems Inc.
Computer Workshop
of Pittsburgh
Stevens Electronics
Tydings Company
Hamline Electronics G. Y.C. Company

Jabbour Electronics City Jabbour Electronics City

Technical Services Inc.

William's Data Comp Division Masstronics Byte Shop Bluff City Electronics Sere-Rose & Spencer Electronics Computer Denn

Computer Encounters Inc. CompuShop Altair Computer Center Interactive Computers Sherman Electronics Supply Inc.

Alpine Electronic Supply Co.

Computer Hardware Store Computers Plus Inc. Heathkit Electronic Center Lafayette Electronics Lafayette Radio Computers-To-Go The Computer Place Computer Workshop of North Virginia Heathkit Electronic Center

> C & J Electronics Progress Electronics Riverview Electronics C & J Electronics C-Com Empire Electronics Personal Computers

The Computer Corner Electro Distributing Co. Thompson's Radio Shack Lafayette Radio Asso. Store

The Computer Shop Home Computer Centre Wang's Microcenter

Electrotecnia S.A. Sonitel, S.A.

Computer Boutique

Inter-Trade (PTE) Ltd.

SEE YOUR LOCAL im-pak DEALER TODAY!

For Dealer Information, write or phone JIM-PAK®, 1021 Howard Ave., San Carlos, California 94070 (415) 592-8097

conversion subroutine.

- 6. Ask the human if done.
- 7. Get input from the human.
- 8. If human is done, end.
- 9. If human is not done, go to #1 above.

The conversion subroutines are, in outline, all identical. They are:

- A. Clear screen on CRT.
- B. Print list of conversions available in subroutine for human.
- C. Get input from the human.
- D. If input invalid, go to # A, above.
- E. If input is valid:
- 1. Ask the human for the data to be converted.
- 2. Get input from the human.
 - 3. Do conversion.
- 4. Print answer for the human.
- 5. Return from the subroutine.

Referring to the sample run of the Metric-American Conversion program, you see the program will convert measurements of length, area, volume, weight and temperature from metric to American or from American to metric systems of measurement. In the sample run, we chose to do a length conversion of one inch to centimeters. As you can see, the length conversion does not allow yards or millimeters, which are both common measurements. This is because I have no difficulty in converting feet to yards or yards to feet, nor do I have any problem with centimeters to millimeters or millimeters centimeters. And I seriously doubt if you do either. Also, we have so very many different kinds of volume measurement (cubic inches, cubic feet, cubic yards, fluid ounces, pints, quarts, gallons, bushels, pecks, etc., etc.) that I was forced to choose only those I considered most important. So, you may wish to add or substitute those you consider most useful of the volume measurements.

1680 PRINT TAB(5);"4...OUNCES TO GRAMS" 1690 PRINT TAB(5); "5... POUNDS TO KILOGRAMS" 1700 PRINT TAB(5); "6... TONS TO METRIC TONS" 1710 INPUT X 1720 IF X < 1 THEN 1610 1730 IF X > 6 THEN 1610 1740 ON INT(X) GOTO 1750,1800,1850,1900,1950,2000 1750 PRINT "GRAMS"; 1760 INPUT G 1770 O = G/28.3495271780 PRINT G;"GRAMS = ";O;"OUNCES" 1790 GOTO 2040 1800 PRINT "KILOGRAMS"; 1810 INPUT K 1820 P = K/.4535924 1830 PRINT K;"KILOGRAMS = ";P."PO UNDS" 1840 GOTO 2040 1850 PRINT "METRIC TONS"; **1860 INPUT M** 1870 T = M/.90718491880 PRINT M;"METRIC TONS = ";T;"TONS" 1890 GOTO 2040 1900 PRINT "OUNCES"; 1910 INPUT O 1920 G = 0*28.349527 1930 PRINT O;"OUNCES = ";G;"GRAMS" 1940 GOTO 2040 1950 PRINT "POUNDS"; 1960 INPUT P 1970 K = P*.45359241980 PRINT P;"POUNDS = ";K;"KILOGRAMS" 1990 GOTO 2040 2000 PRINT "TONS"; 2010 INPUT T 2020 M = T*.90718492030 PRINT T;"TONS = ";M;"METRIC TONS" 2040 RETURN 2045 REM ***LINE 2050 IS THE ENTRY OF THE TEMPERATURE CONVERSION SUBROUTINE *** 2050 GOSUB 230 2060 PRINT TAB(10); "TEMPERATURE CONVERSION" **2070 PRINT** 2080 GOSUB 270 2090 PRINT TAB(5);"1... CELSIUS TO FAHRENHEIT" 2100 PRINT TAB(5);"2... FAHRENHEIT TO CELSIUS" 2110 INPUT X 2120 IF X \leq 1 THEN 2050 2130 IF X \geq 2 THEN 2050

2140 ON INT(X) GOTO 2150,2200 2150 PRINT "DEGREES CELSIUS"; 2160 INPUT C 2170 F = (C*9/5)+322180 PRINT CC;"DEGREES CELSIUS = ";F;"DEGREES FAHRENHEIT" 2190 GOTO 2240 2200 PRINT "DEGREES FAHRENHEIT"; 2210 INPUT F 2220 C = (F-32)*5/92230 PRINT F;"DEGREES FAHRENHEIT = ";C;"DEGREES CELSIUS" 2240 RETURN 9999 END

Conclusion

The more we've used the Metric-American Conversion program, the more uses we've found for it. We hope you will enjoy using it, too. As America has already entered the long, painful process of converting to the metric system, I feel certain we will all find a great many uses for it in the future. Incidentally, as you've probably guessed, after / had written the program for her, Foxy put me to work doing all of the conversions that she had been working on while she went caving. If I live to be 100, I'll just never understand women.

METRIC-AMERICAN CONVERSION

DO YOU WANT TO CONVERT:

1...LENGTH

2... AREA

3...VOLUME 4...WEIGHT

5...TEMPERATURE

PLEASE INPUT THE 'NUMBER' OF YOUR CHOICE. (INPUT '99' TO END)

LENGTH CONVERSION

DO YOU WANT TO CONVERT:

1... KILOMETERS TO MILES 2... METERS TO FEET

3... CENTIMETERS TO INCHES

4... MILES TO KILOMETERS 5... FEET TO METERS


6... INCHES TO CENTIMETERS

INCHES? 1 1 INCHES = 2.540005 CENTIMETERS

HAVE YOU FINISHED (YES=1)? 1

Sample run.

NORTH STAR 16K RAM A star from our Horizon

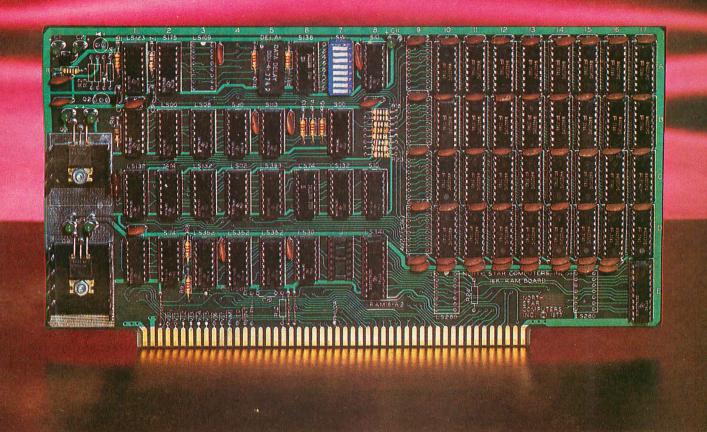

The North Star 16K RAM board is a star performer in our HORIZON computer. Just as important, it is the ideal memory for most other S-100 bus systems. No other RAM board can surpass the speed, reliability, and quality features of the North Star 16K RAM at any price.

SPEED — The North Star 16K RAM is the fastest S-100 bus memory board available. No wait states are required, even with a Z80 at 4MHz. And, of course, this outstanding 16K RAM will operate with both 8080 and Z80 processors at 2MHz. Industry standard 200ns dynamic RAM chips are used. Invisible on-board refresh circuitry allows the processor to run at full speed.

RELIABILITY — The North Star 16K RAM is designed to match the same high standards as our MICRO DISK SYSTEM and HORIZON computer. For example, all address and data signals are fully buffered. A parity check option is available with the 16K RAM for applications requiring immediate hardware error detection. If a memory

error occurs, a status flip/flop is set and an interrupt can inform the processor. Or, if preferred, an error status light will go on.

FEATURES — The North Star 16K RAM offers many desirable features. Addressability is switch-selectable to start at any 8K boundary. The board can perform bank switching for special software applications, such as timesharing. Also, bank switching can be used to expand the amount of RAM beyond 64K bytes. Power consumption is minimal — the maximum power requirements are: .6A @ 8V; .4A @ +16V, and .1A @ -16V.

PRICES — \$399 kit. \$459 assembled, tested and burned-in. Parity option: \$39 Kit. \$59 assembled, tested and burned-in.

Write for free color catalog or visit your local computer store.



The Heath/DEC Connection (Part 1: Overview of the H11 System)

Familiar to some, unknown to others; Heath's new H11 is certainly a different breed of microcomputer. Find out on the following pages what sets it apart from the rest.

Steven B. Lionel Kilobaud Staff

The story starts back in 1975 when the Altair 8800 made

its big splash in the hobbyist computer market. The Heath Company, a recognized leader in electronic kits, decided to get into the burgeoning small-computer field. Heath started to work on their 8080A-based H8, but they wanted something

more. They wanted to offer a computer that fit Heath's policy of selling state-of-the-art electronics at a low price. Heath decided to sell a 16-bit computer that could use software already in widespread use.

So it came to pass that

Heath, the world's largest electronic kit-maker, joined forces with Digital Equipment Corporation, the world's leading manufacturer of minicomputers. In the fall of 1977, Heath introduced the H11 minicomputer, based on Digital's LSI-11 processor board.

The LSI-11 is the smallest of Digital's -11 line of computers, consisting of the micro-based LSI-11, the older (and still popular) PDP-11 series and Digital's newest addition, the VAX-11. There is a great deal of software available for the -11 computers—much of it usable on an LSI-11. Heath currently offers the H11 with paper tape only, but provides a good selection of languages and utilities.

Current Software

The software that comes with the H11 is all part of Digital's PTS (Paper Tape System) software line. Some of it has been modified by Heath, but every tape carries a Digital copyright. BASIC-11 is an extension of Dartmouth BASIC with excellent string handling and many special functions, as



A Heath computer system—the H10 paper-tape reader/punch, the H9 video terminal and the H11 computer. All Heath computer products share a handsome basic cabinet design.

well as the obligatory PEEK and POKE. Although it is not as powerful as many microcomputer BASICs (no ON ... GOTO, for example), it is more than adequate for most purposes. BASIC-11 requires 8K words of memory.

A second high-level language included is FOCAL, Digital's own BASIC-like language that is powerful and compact. FOCAL has many features that BASIC-11 does not have, such as formatted output, but has essentially no string capability. There are two versions of FOCAL included with the H11: a 4K version and an 8K version that has such esoteric features as task scheduling and a clock.

The H11 assembler is PAL11, an easy-to-use two or three pass non-macro assembler. Assembled programs must be processed by the linker, LINK11S, before they can be run. Also included in the software is ED-11, a good editor that can operate on lines or on characters. It looks much like the other Digital editors and will seem familiar to people who have run on other Digital machines.

ODT-11X is a powerful debugging tool supplied in object form to be linked with other programs. A unique feature of the LSI-11 is that a subset of ODT is a permanent part of the CPU and can be used for debugging without occupying any memory at all.

Extremely helpful to assembler programmers is the IOX (Input Output eXecutive) library of I/O subroutines. IOX allows you to write programs without worrying about what I/O device you will be using; this is specified in a single initialization statement. It also provides intermediate editing and buffering on devices. For example, terminal input can be automatically echoed, entire strings can be read (rather than individual characters) and various control-characters, such as rubout/ delete and control-U/line-kill, are automatically implemented.

Rounding out the software offerings are two types of memory-dump routines and the ab-

solute loader used to load most programs into memory.

Peripherals

Along with the H11, Heath introduced two low-cost peripherals. The H9 is a video display terminal with a versatile interface and some unique features, including a plot mode and a short-form mode that reformats the screen into 48 twenty-character lines (normal format is twelve 80-character lines). For "mass storage," Heath offers the H10, a 10-characterper-second paper-tape punch combined with a 50-characterper-second paper-tape reader.

All Heath computers and peripherals share a handsome basic enclosure design, as shown in the photos. Heath also offers Digital's best-selling LA36 DECwriter II, a 30 cps matrix-printing terminal. The H36, as Heath calls it, is sold assembled at a price that is nearly impossible to beat for single quantities.

Future Offerings

Heath has made a major investment in their computer line—hiring many engineers who are racing to get new products on the market. The primary item missing from the current H11 system is a random-access storage device.

Heath's cassette for the H8 is not compatible with the H11; however, Heath is working on a floppy-disk drive and will release it toward the end of the year. The drive will be by Memorex and have a controller based on Western Digital's floppy-disk controller chip. It will have a 256K byte capacity with soft sectoring, and will be available in both single- and dual-disk configurations.


Heath will use its own format for writing on the disk, but will provide a switch that will allow it to write in a format compatible with Digital's RXV11 floppydisk system. This means you could run Digital's RT-11 operating system on the H11, although the software license, at \$2760, will probably set you back a good deal. Instead, Heath is developing its own HDOS operating system. Simi-

lar to RT-11, it is a cooperative effort between Heath and Digital. HDOS will come with a disk BASIC and FOCAL, along with supporting software.

The future holds a lot for H11 owners. According to Heath, a "major software effort" is being expended to produce FORTRAN, APL and PASCAL for the

the HALT position, the H11 can single-step program execution. Missing from the H11 is a switch controlling the line time clock (one controlled by line frequency), as is found on the PDP-11/03. Instead, this function is controlled by a jumper on the power-supply board.

The H11, essentially a

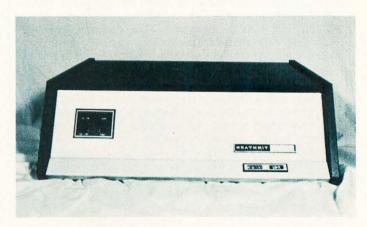

The Heath H11 computer. Digital's LSI-11 processor is what makes it go.

H11. On the hardware side, Heath plans to sell Digital's LSI-11/2 processor, which is half the size of the current LSI-11 and does not include the on-board 4K words of RAM. Heath may also offer Digital's higher-density RAM boards of 8K, 16K and 28K words, making possible a system with the maximum amount of RAM (56K bytes), a floppy, a serial and a parallel interface with a slot left over, all inside the H11's cabinet.

Computer and Options

The H11 microcomputer consists of an assembled and tested Digital KD11-F LSI-11 processor board, an eight-slot backplane and card cage, and a regulated power supply. The power supply can be set by a switch to run from either a 120 V or 240 V line voltage. The voltages are regulated before being distributed to the backplane, so that no heat-producing on-board regulators are needed.

There are only two switches on the front panel. One controls the dc power on the backplane and the other is the RUN/HALT control. When the switch is in

PDP-11/03 in kit form, is completely compatible with all existing LSI-11 modules. Therefore, the bus used is Digital's Q-BUS, a 36-line, 16-bit bus that has built-in interrupt priority determination and allows DMA (direct memory access), where I/O can take place without the processor's services.

As nice as the Q-BUS is, it has a negative side for hobbyists: Since Digital jealously guards its patents on the -11 computers, no one can sell anything that plugs into the Q-BUS without a license from Digital. This will probably prevent the widespread availability of inexpensive modules for the H11.

The LSI-11's system architecture is radically different from the common 8-bit microprocessors. First, there is no accumulator. Instead, there are eight high-speed registers, any of which may be used as source or destination for most instructions. Even more unusual is that memory locations can be used as operands with equal ease. This allows arithmetic, comparison and program control without ever referring to registers. Additional addressing modes are register indexed,

Glossary of Jargon

String Handling: This does not, as it sounds, have anything to do with a cat's-cradle exchange. In computer jargon a string is any series of characters treated as a group (for example, a person's name would be a string of letters, an address would be a mixture of letters and numbers, etc.). Some computer languages are better than others at dealing with these groups of characters. This is called string handling.

Powerful: This is a beauty. *It has no real meaning.* In advertising literature it means the advertised system is better than others, but usually for undefined reasons. The power of a computer is its ability to do things, so a more powerful computer can do more in a given time. In general, the term is used when a writer feels intuitively that a system is better than others, but is unable to point out the reasons.

Formatted Output: Let's say you want to print a name, address, city, state and zip code for mailing. You'll want this to be in three lines so the post office can (you hope) read it. To do this you have to have a format program that tells the computer to put the name on the first line, etc. If you wanted the information all on one line for a 132-column computer page printout, you would format the printing differently. Some languages make it easy to set up these formats; others require all sorts of programming work.

Task Scheduling: The LSI-11 system is set up so it can seemingly do two things at once. Let's say you want to sort out a list of names and addresses into zip-code order from alphabetical order by last name. This is going to take a while. In the meantime, while the system is grunting away at the sorting program, you can play a game of Star Trek. The H11 will work on the sort without bothering you. When you key in a command it stops the sorting program, files away what it was doing so it can go back to it after it has attended to your demands, then goes to your Star Trek program and executes what you've keyed in. When that is done, a few microseconds later, it puts all your stuff in another file and gets out the sorting program and continues with that. This is called task scheduling.

ON-GOTO: As you become more familiar with BASIC you'll understand about this. Until then don't worry about it. The ON-GOTO is a time-saver in programming, but you can make do without it by adding a few extra programming steps.

Editor: The editor of a magazine corrects spelling, bluepencils words, etc. The computer editor makes it possible to do these things. The better the editor, the more things it can do. A simple editor might enable you to delete a character on your tube . . . a word . . . a line. It can allow you to move the cursor around where you wish. It might permit you to add a character or word into a line. A more involved editor could allow you to search a string of words for any particular word or pattern of words you wanted. The more functions an editor has, the more "powerful" it is.

Clock: The word "clock" is used in computers to mean several things. Every computer has to have a time-generating system to step it through its operations. This is called a clock. The speed of this clock determines the speed of a computer. Most of the 8080-type systems run at around 2 MHz... the 6800 at around 750 kHz, the 6502 at around 1 MHz and the Z-80 at 3 MHz, generally. The H11 runs at 10 MHz. Another type of clock, usually called a "real-time clock" to identify it from the "system clock," keeps track of time for you. The PET comes with this clock built in so all you have to do is set it when you plug in the computer and it will keep reasonably good time for you. The Altair-type systems require that an accessory real-time clock board be used—this usually costs around \$100 or a little less. This is the type of clock referred to as being built into the H11.

Wayne Green

indirect, absolute, autoincrement and autodecrement (useful for stacks) and relative mode for branching.

The LSI-11 implements the 400 + instruction set of the PDP-11/40, although not as quickly. The instruction set is well designed and efficient, with many instructions operating either on bytes or on words. Available as an option is a special ROM chip that implements 32-bit integer and floating-point arithmetic as found on the PDP-11/45.

The KD11-F processor board contains the four processor chips, a socket for the optional EIS/FIS ROM chip described above, all necessary logic to control the Q-BUS and 4K of dynamic RAM. The on-board RAM can be used as the 0-4K area or the 4-8K area, depending on a jumper. Optionally, the on-board RAM may be completely disabled, allowing other memory to occupy the low addresses. The processor board generates a refresh signal for dynamic memories, although the current offering by Heath is


Because of its size, 8.5 x 10 inches, the KD11-F board occupies two backplane slots, although only one is used. If the new KD11-HA LSI-11/2 processor-only board is used, the extra option slot will be free. Heath plans to offer this new board soon.

At this time, Heath offers

three accessory boards for the H11. The H11-1 is a 4K-word static-RAM memory board with an average access time of 500 ns. The H11-1 uses 2114 1K-by-4-bit memory chips and can be jumpered for any of the eight memory banks. The H11-2 parallel interface module allows easy control of parallel devices such as the H10 papertape reader/punch. The third offering is the H11-5 serial interface, which can be jumpered for various baud rates and signal types. Although all H11 option boards are Heath designed, all are completely compatible and interchangeable with existing LSI-11 boards.

Building the H11 is a breeze. The CPU board is already assembled and tested. One circuit board is used for the power supply and one for the backplane. Heath's use of soldermasked boards makes solder bridges nearly impossible.

With their new computer line, Heath surpassed themselves on documentation. The H11 comes with a padded vinyl binder stuffed with hundreds of pages of information about the instruction set, Q-BUS, logic descriptions, troubleshooting, schematics and hundreds more on the software. However, Heath's technical writers have not been quite so prolific, since much material is reproduced from Digital publications. Still, there is no lack of information on the H11, and it is welcome.

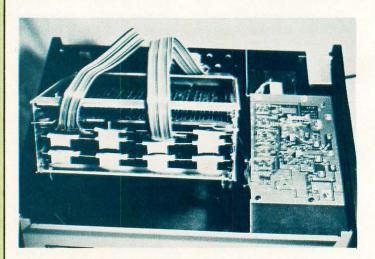

Inside the H11 with backplane raised. Ribbon cables connect peripheral controllers to sockets on the back panel. Power supply is on the right.

My only complaint is that the binder supplied simply won't hold all the pages in place!

H11-Is It Worth It?


There is a question floating around that is usually phrased as, "LSI-11 vs 8080, it is worth twice the price?" The answer depends on what you are looking for. If you want your computer to sing the Star Trek theme while you zap the Klingons in multicolor graphics, the H11 is probably not for you. However, if you want serious computing capabilities for professional, small business or educational environments, the H11, at \$1295, will give you performance that no 8-bit microcomputer can touch. The H11 is no plaything, and in my opinion, is the best microcomputer on the market

Next month we'll discuss the H11's peripherals.■

The following are trademarks of the Digital Equipment Corporation: LSI-11, PDP, DIGITAL, FOCAL, DECUS, Q-BUS, VAX, DECwriter.

BASIC is a trademark of the Trustees of Dartmouth College. Teletype is a trademark of the Teletype Corporation.

Heath is a trademark of the Heath Company.

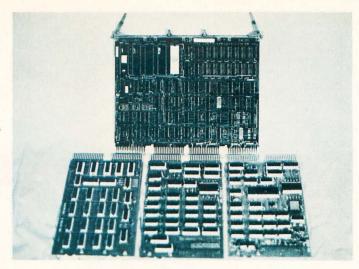

Clockwise from top-LSI-11 CPU board, H11-5 serial interface. H11-2 parallel interface and H11-1 4K RAM.

2708/16 **EPROM PROGRAMMER**

for the F-8, 6800, 8080, 1802, or KIM-1 microcomputers.

> • RAM starting address, PROM starting address, number of bytes to be programmed can be easily specified.

Features:

- Includes software for verifying programming.
- Hardware requires only 11/2 I/O ports to interface to any microcomputer.
- •Low insertion force programming socket.

Assembled and tested w/software \$59.95, Kit \$49.95. Kit w/out software but w/software instructions \$33.00. We ship 3 days ARO for M.O. or C.O.D. After 1 PM 804-973-5482

Optimal Technology, Inc. Blue Wood 127 Earlysville, VA 22936 010





TRS-80

INTELLIGENT MICRO-MOUSE ?

Let the purists argue whether this programmed graphic "mouse" has true artificial intelligence, Anyway it's certainly not a stupid mouse, and certainly it's a persistant point within a 20-cell maze, and having escaped, it's able to find its way back into the maze! Three experience and interesting the superience of "Micro-Mouse" are provided on a cassette, Each of these runs under Level I hasic in \$40.6 mesory.

MICRO-MOUSE - \$10.00 Micro - Mega

M54

P.O. BOX 6265 . ARLINGTON, VA 22206 (Virginia residents add 4% sales tax)

TELETYPE° MODEL 33 ASR

COMPUTER I/O COMPLETE WITH:

- Tape Punch
- Ready to Go
- Tape Reader
- Line/Local Wired
- Guaranteed 30 Days

\$84000

If its for TELETYPE° We Have It. If you don't see what you need CALL or WRITE!



TELETYPEWRITER COMMUNICATIONS SPECIALISTS 550 Springfield Avenue • Berkeley Heights, N. J. 07922 (201) 464-5310 • TWX: 710-986-3016 • TELEX: 13-6479

SUBSIDIARY OF VAN'S W2DLT ELECTRONICS.

North Star Software

Maillist
Maillist is a general purpose mailing label program capable of
producing formatted lists for tractor-fed or Xerox type labels.
Maillist will also sort lists for any field.

Price \$39.95 on diskette with manual/stock to 14 day delivery.

Dos in-out driver is designed to set up mapped memory video boards in conjunction with hard copy device. The user may switch output under software control. Any file directory may be listed while in BASIC without jumping to dos. Spacebar will stop output for line by line listings. Designed for use with 3P+S and any ty board.

Price \$12.95 on diskette with manual/stock to 14 day delivery

Register Register is a cash register and inventory control program. The software will control a point of sale terminal and printer. It will search inventory for an item, price and ticket it. Register has provisions for min-max, automatic reorder, and critical list. Price \$299.95 on diskette with manual

All prices are FOB Santa Barbara, California. Terms COD Residents add 6% sales tax and \$1.00 shipping.

Alpha Data Systems A48 Box 267, Santa Barbara, Ca. 93102 - 805/682-5693

PET and TRS-80:

'Just LOAD and GO' Software Pre-recorded Business Programs
USEFUL-PRACTICAL-LOW-COST! **DISPLAY only or DISPLAY/PRINTER**

GENERAL LEDGER-For home businesses, and sole proprietorships, small cor-porations—\$19.95 plus \$1.50 ship-

ping/handling.
Requires 8K minimum user memory CHECKING ACCOUNT-For personal bank

accounts-\$19.95 plus \$1.50 shipping/ handling Requires 8K minimum user memory

RENT ACCOUNTS-Records for rental properties—\$16.95 plus \$1.50 shipping/ handling

LEGAL DIARY-For attorneys (Client Accounts) \$16.95 plus \$1.50 shipping/handling

TRUST ACCOUNTS-For attorneys (Client Accounts)-\$16.95 plus \$1.50 shipping/ handling

Programs-MASTER and DEMO cassette, plus 2 PerCom "Pilon-30" record cassettes—money back guarantee Complete instructions—All programs copyrighted All mail orders must be pre-paid.

Dealer Inquiries Invited

COMPUTERS ONE C81

#306 Kahala Office Tower 4211 Waialae Ave.

Honolulu, HI 96816 (808)737-2933

Home System Demo Program

A demonstration program is valuable for hobbyists showing off their micros. It's more valuable for retailers trying to sell systems to customers who don't know computers.

Mark Herro 311 Woodland Ln Oconomowoc WI 53066

'Il level with you. I don't have a computer (yet). The software you may have seen from me on the pages of 73 and Kilobaud came from either a timesharing service's system or was mooched from somebody else's microcomputer. Don't get me wrong-those are my programs; I just "borrowed" a computer to debug and run them.

Introduction . . . The Question

Even though I'm not a true "hobbyist" yet, I've learned a lot from Kilobaud and other sources-particularly that a lot of the software out there is merely games, sophisticated or otherwise. I'm not saying games are bad, but how does the abundance of them appear to the complete outsider who thinks computers are just nasty machines that foul up credit bills? "Just an expensive toy," they might think, leading to that often heard and "loved" question: "What else can you do with it?" "Anything you can



answer!

The Answer

I'm aiming this article at two groups of people. One is computer users (with up and running machines) who want to show off their gear to noncomputer types without scaring them away with the buzzwords or by playing games all night.

The other group is computerstore retailers! Refer to John Craig's editorial in Kilobaud No. 6. If John had really been the people he pretended to be, I think that he would have been turned off to computers for I. Introduction

A)"I'm Mark's computer . . . "

B)Brief history (" . . . Mark built me about a year ago . . . ")

C)Overview of DP (" . . . I'm going to show you . . . ")

II. Small Talk

A) Name query

B) Age query

C)Comment on name/age

III. Demonstration of security system

IV. Educational program demonstration

V. Demonstration of graphics display

VI. Home accounting/budget program

VII. Demonstration of ham radio system

VIII. Demonstration of programming capabilities

A)Short explanation of BASIC

B) Math programs

C) English programs

D)Other possibilities

IX. Conclusion

Fig. 1. Possible DP outline.

quite a while.

What is really needed is something to show off the capabilities of a computer system that isn't too technical, and doesn't play games: a Demonstration Program-I'll call it a DP for short—with brief demonstrations of a computer's abilities. A DP would probably have to be different for each computer (i.e., Mits, SWTP, Poly, Imsai, Compucolor, etc.) and each computer's available memory, operating systems, I/O, special functions and the like. In other words, a DP would almost have to be tailor-made to each and every computer running. Think of what could be done. The individual programming possibilities are almost endless! As a starting point for a DP, I will assume the following conditions: (1) you have a computer; (2) you have a high-level language: (3) you want to show off your computer; (4) you want to sell your computer.

What Should Be In It?

What should a DP contain? Take a look at your computer's outside hardware and directly observable equipment (not internal processor timing, bus structure, DMA, or other such "buzzwordy" nonsense. You may say "Waddya mean, 'nonsense?!""-it's all GIGO (Garbage In/Garbage Out) to people not familiar with computers.). Look for things like graphics modes. Can the video readout run on a color TV (like Apple-II and Compucolor)? Can the computer play (or compose) music? Is it used for home security? Ham radio? Anything that has a direct outside-world link can be used in a DP.

Even if you don't have any of the above capabilities, you can still run a "bare-bones" DP. A good place to get ideas for this "no frills" type of DP might be the "Hello" program (game) in 101 Computer Games. In this program, a person may have a "conversation" with the computer (which acts as a sort of psuedo problem-solver) and get appropriate answers to user questions.

A point should be taken from this: A DP should be *interactive* between the "demonstrator" and the "demonstratee." Initially, a DP could ask for names and ages, and, if possible, engage in some small talk. The ideal DP would show off all the computer's capabilities while

at the same time interacting

with the user. Fig. 1 shows a

sample DP outline.

Of course, all the demonstrations would only be as long as the programmer wanted to or could make them; I must emphasize that there wouldn't be just one type of DP. A DP would have to be tailored to each system's capabilities. A sample of a partial DP printout is shown in Fig. 2.

Conclusion

A DP would be invaluable to hackers trying to show off their microcomputers. It would be even more valuable to the retailer (manufacturer?) who must try to sell his systems to non-computer-oriented customers. I hope I have given some good ideas to someone out there. Get going.

########COMPUTER DEMONSTRATION###### HELLO! I'M MARK'S COMPUTER. I BET YOU THINK COMPUTERS ONLY MESS UP YOUR BILLS, RIGHT?

WRONG!!
I AM GOING TO SHOW YOU SOME OF THE THINGS MARK TAUGHT ME TO DO. MARK ONLY BUILT ME A YEAR AGO, BUT I CAN DO ALL SORTS OF NEAT THINGS.
BUT FIRST, I WOULD LIKE TO KNOW WHO I AM TALKING (WELL.)

BUT FIRST, I WOULD LIKE TO KNOW WHO I AM TALKING (WELL, PRINTING) TO. WHAT'S YOUR NAME? <u>BILL</u> HELLO BILL, HOW OLD ARE YOU? <u>205</u> A COMEDIAN, HUH?

OK, MOSES, HOW OLD ARE YOU—REALLY? <u>25</u>
ALMOST OVER THE HILL, COMPARED TO ME.
OK, BILL, NOW I WILL SHOW YOU WHY A BURGLAR SHOULDN'T COME
TO THIS HOUSE AND TRY TO STEAL ME.
SEE THAT WINDOW JUST TO THE RIGHT OF ME? <u>YES</u>
OPEN IT.

(The window is opened and the bell on the terminal goes off)

OK, SHUT THE WINDOW! SHUT THE WINDOW! IF THIS WASN'T A TEST, I WOULD HAVE SOUNDED THE WHOLE HOUSE ALARM SYSTEM, TURNED ON THE LIGHTS, AND IF MARK DIDN'T GIVE ME A SPECIAL COMMAND, I WOULD CALL THE POLICE

NEAT, HUH?

BILL, ARE YOU A GOOD ARTIST? NOT REALLY OH, BILL, I AM STILL PRETTY DUMB WHEN IT COMES TO LANGUAGE. JUST ANSWER YES OR NO. ? NO

WELL, YOU CAN HAVE ME DRAW ALL SORTS OF PICTURES (EVEN DIRTY ONES). BUT JUST TO DEMONSTRATE, I'LL WRITE YOUR NAME IN BIG LETTERS . . .

| BBBB | BBBB | ШШШШ | LLLL | LLLL |
|------|------|---------|------------|-----------|
| BBB | BB | 1111111 | LLLL | LLLL |
| BBB | BB | ШШ | LLLL | LLLL |
| BBB | BBB | ШШ | LLLL | LLLL |
| BBB | BB | ШШ | LLLLLL | LLLLLL |
| BBB | BB | ШШ | LLLLLLLL | LLLLLLLL |
| BBBB | BBBB | ШШШШ | LLLLLLLLLL | LLLLLLLLL |

I AM PRETTY GOOD AT PLOTTING MATHEMATICAL CURVES TOO

(rest of the program runs through)

SO YOU SEE BILL, YOU CAN USE ME FOR ALL SORTS OF THINGS; IT'S JUST A MATTER OF CORRECT PROGRAMMING. IT ISN'T HARD, ONCE YOU GET THE HANG OF IT.

NOW THAT YOU KNOW MORE ABOUT ME, GO AHEAD AND PLAY SOME GAMES. TAKE THE CASSETTE MARKED "GAMES" AND PUT IT INTO THE RECORDER. YOU HAVE A WHOLE BUNCH TO CHOOSE FROM, BUT I RECOMMEND "TREK" OR "DEPTH CHARGE"—HAVE FUN!! BYE. READY

Fig. 2. Partial DP sample printout.

Do-It-All Expansion Board for KIM

The following design and repackaging information should appeal to many, if not all, the KIM-1 owners out there who are looking for more in this very popular system.

George Young Sierra High School Tollhouse CA 93667

Breathes there a KIM-1 owner who is completely satisfied with his KIM-1? The number of articles appearing about this very popular computer and about repackaging it surely mean that many owners seek a more presentable microcomputer with expanded capa-

bilities. This article presents an expansion board for the KIM-1 as well as some ideas for repackaging the basic KIM-1 circuit board.

The Expansion Board

The expansion board is the same size as the KIM-1 circuit board and is designed to mount below the KIM-1 board with stand-offs. The board is a "universal type," meaning that it will take 14-, 16-, 24- and 40-pin ICs and that it can be either wire-wrapped or hard-

wired. I plan to use my board to add: (1) more memory, (2) Don Lancaster's TVT-6L circuitry from *Kilobaud* No. 6, (3) Bob Grater's SAB-1 circuitry from *Kilobaud* No. 1, (4) a Selectric interface similar to the one described in "another magazine," (5) whatever else is published for KIM that I need and can use.

Since the expansion board is almost the same size as a page of *Kilobaud*, some reduction of the artwork is required to fit it into the magazine. If you are going to home-brew your own board, you will need to use the skills and techniques presented in "Make Your Own PC Boards" (*Kilobaud* No. 16, page 24).

In trying to anticipate your needs, we have made arrangements for the Byte Shop, 3139 E. McKinley Ave., Fresno CA 93703, to produce the board for you at \$35 postpaid. It will be a single-sided, G-10 glass-epoxy board with numerically controlled drilled holes. (You couldn't drill all the holes on that artwork for \$35 worth of labor!) Mating connectors for the board are also available from the same source for \$5 per pair.

Should you find it necessary to have contact fingers available on both sides of the board, there are two ways to accomplish this.

The first way is the easiest for those who live close enough to an Electronic Supermarket. Obtain Circuit StikTM part number 3396-002; you will need just one package per KIM-1 expansion board. This 22-pin printed-circuit-board edge connector will mate with the sockets and comes two per package. (Just be sure you get them anchored at the correct location on the back of the KIM-1 board.)

Should you be "out of range" of the Electronic Supermarket, the task will be a little more difficult. You'll have to home-brew a device like the Circuit Stik edge connectors. There is a flexible copper-clad epoxy board available that you can print on in the fashion described in "Make Your Own PC Boards." The edge connectors formed in this fashion can be glued to the back of the KIM-1 board. I use Goodyear PliobondTM general-purpose adhesive for this purpose.



Photo 1. Expansion power supply.

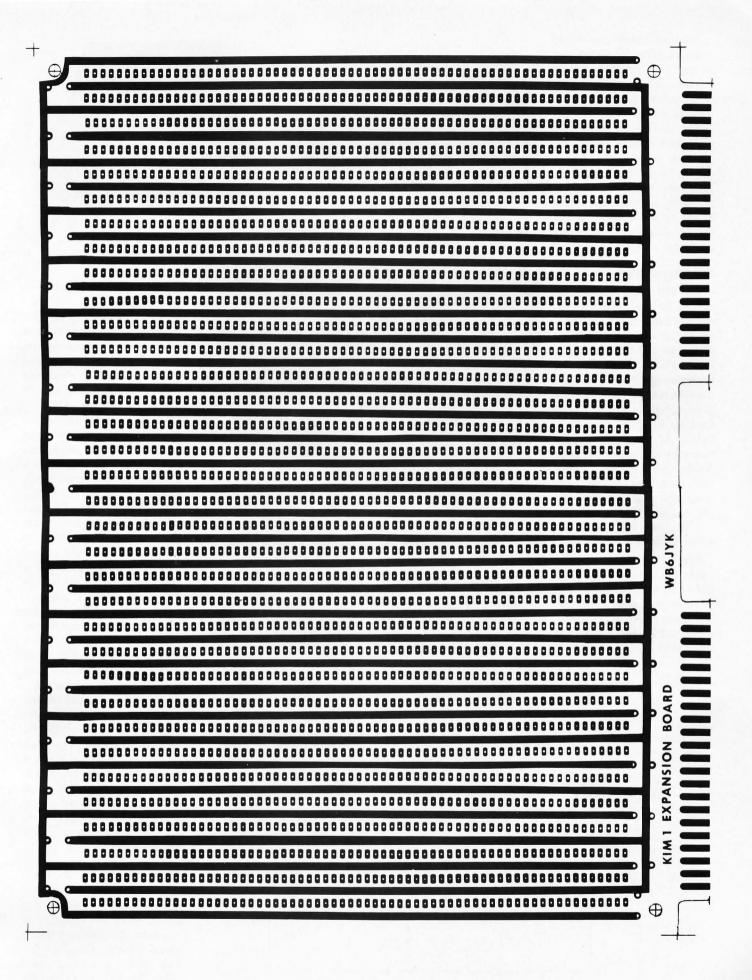


Fig. 2. Original artwork for the KIM-1 expansion board (reproduced here at 85 percent).


Extra-thin copper clad is also available in the Circuit Stik line as part number 9252 (3 x 4 inches) and part number 9251 (5 × 6 inches). The Circuit Stik material comes with a self adhesive backing, so use of this material bypasses the gluing problem. If you cannot find it locally, then order from Circuit Stik, 24015 Garnier Street, PO Box 3396, Torrance, CA 90510, or call (213) 530-5530 and ask where you can buy their products.

KIM-1 Power Expansion

The first thing that will be needed for the expansion circuitry is additional power capability. Fig. 1 shows my version of the new KIM-1 power supply. Photo 1 also shows the new power supply. The transformer used is a rewound core from the vacuum-tube era and has a capacity of about 100 Watts. Details of the power-supply theory of operation have been covered in the Kilobaud Klassroom series, so I shouldn't have to repeat it here. (How else will I get you to read my other stuff?)

A New Enclosure

After studying the various ways that others have given KIM a new housing, I decided to do mine the easiest way possible. The problem is that those capacitors on the KIM circuit board stick up too high. What

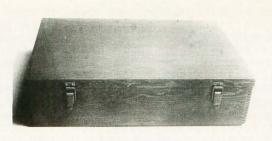






Photo 3. KIM's new "home," ready to travel.



Photo 4. Elevating the keyboard and the display.

can be done is to raise the keyboard and the display about 1/2 inch so a panel will clear these capacitors.


Using a temperature-controlled iron and a vacuum desoldering device, I carefully desoldered the keyboard. I

stripped hookup wire and soldered pieces about 1 inch long to the keyboard contacts. I placed a 1/2-inch-thick block of wood under the keyboard and reconnected the hookup wire to the KIM-1 circuit board. Then I carefully checked out KIM for normal operation.

The display also had to be elevated about 1/2 inch; so I carefully desoldered the display module and then cleaned solder from the seven-segment readout pins. I removed pins from an AugatTM wire-wrap module and slipped each pin over one of the pins on the LED readouts. Finally, I soldered the Augat pins to the KIM circuit board. This raised the display (see photo). Again, I carefully checked KIM for normal opera-

Everything looked OK, so I made a cardboard template that would exactly fit over the KIM keyboard and the display module, and then used this to make the cutouts in a 1/16-inchthick piece of plastic laminate.

A briefcase-style case made of walnut-stained wood formed the new home for KIM (a simpler method would be to use an actual briefcase). Photos 2 and 3 show the completed KIM-1 package. I plan to add connectors, probably down the middle of the plastic laminate, for connection of the various peripherals. In the meantime, KIM-1 is now well protected and is portable. My students can (and are) packing it home almost every night so they can use KIM in its more-or-less original configuration.



laminate is too flexible and bends when the keyboard is operated. To overcome this, I glued wooden strips to the back of the plastic laminate with a hot-glue gun to give the panel sufficient rigidity.

The 1/16th inch plastic

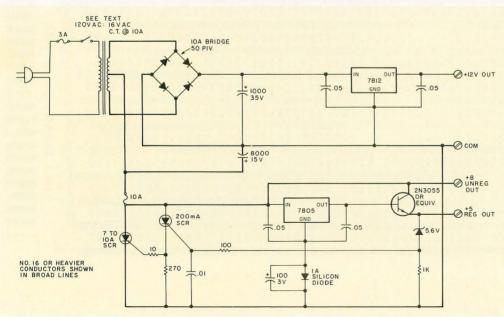


Fig. 1. KIM-1 expansion power supply.

SELECTRA-TERM



Turn your TRS-80 into a complete word processing system.

Just hook up the cables and connectors supplied with your SELECTRA-TERM and you're ready to run. Input your text and type the single command: LPRINT. The SELECTRA-TERM automatically outputs clear,

clean high fidelity copy. Incredibly simple!

Brand new. \$1925☆
Fully assembled and tested.
Delivery five weeks.
Many options available.
☆115 VAC, 60 Hz Model.

COMPARE THIS DOT MATRIX OUTPUT

with the SELECTRA-TERM high fidelity impact print!

Direct international sales inquiries to International Sales Division 17648 Orna Drive Granada Hills, CA 91344 USA

Discounts Available to EDUCATIONAL ACCOUNTS

Contact Dolores Sun P. O. Box 8394 • Ann Arbor, MI 48105 (313) 665-8514 micro
micro
computer
devices

inc.

SELECTRA-TERM can also be connected

to the parallel port of PET - Apple II -

Heath H8 ■ IMSAI ■ Cromemco ■ Alpha

Microsystems ■ Space Byte ■ North Star

Horizon = SWTP = Vector Graphic = Sol =

Polymorphic Digital Group Ohio

Scientific - Altair - Sorcerer - Xitan -

Rex = KIM = Versatile CRT = EXORcisor

960 E. Orangethorpe, Bldg. F Anaheim, California 92801 Telephone (714) 992-2270



*TRS-80 is a product of Radio Shack

"Innovators to the Microcomputer Industry"

Tally Ho!

This strategic game program offers proof that fox hunting is not obsolete.

ox and Hounds is an old game — a variation of checkers played on a standard checkerboard. Unlike checkers, this game is played with only five pieces on the board. There are one fox and four hounds; one player moves the fox, the other the hounds. In

this case the computer moves the "fox," and the human player moves the "hounds."

Since the number of pieces is limited, neither side can jump pieces. The hounds can move in a forward direction only. The solitary fox would run out of moves very quick-

ly if allowed movement only in one direction, so he can move either forward or backward. All moves for both fox and hounds are limited to the standard checker move — that is, one space diagonally per move.

The object of the game is for the fox to reach the safety of line one (1). If the fox can get to line one, the computer (fox) wins. If the human player can trap Renard in a location from which he cannot escape, the human wins.

I wrote this game in SWTP 8K version 2.0 BASIC, which supports multiple statements on each line. However, since most BASICs do not have this feature, I chose not to use it.

I also tried to use only the standard BASIC statements that should be available in any good version. I did this so anyone can type the program into his machine without having to rewrite half the program. (I hate to have to try to figure out what some special statement is supposed to do.)

I did use one nonstandard statement, PRINT CHR\$(16); CHR\$(22), several times to cause my terminal (SWTP CT-1024) to home up and clear the screen. If you have this feature, fine; no change is required. If you do not, you can omit the lines and the program will work anyway. If you have scrolling, simply omit these lines.

Program Description

The program listing shows the program starting in a standard game fashion: asking if the player wants instructions. If the player's answer is yes, the instructions are printed out. Even though the program prints TYPE YES OR NO, anything other than a yes answer is ignored, causing the program to go on to the next line. I see no good reason to force the player to type NO if he does not want the instructions.

The board array is set by the DIM statement in line 110. The array is set to 9 by 9, even though the board is only 8 by 8, so the automatic moves by the computer do not test out of bounds of the array and cause error stops.

Line 330 sets up the fox in his initial position. Lines 340 to 370 set up variables to keep track of the fox's position for the automatic moves. They are also used to print

Program listing.

```
0010 REM *** FOX AND HOUNDS ***
0020 REM *** A CHECKER GAME ***
0030 REM *** PROGRAM BY JACK A. INMAN ***
0040 REM *** OCTOBER 1977 WRITTEN IN SWTPC 8K BASIC ***
0050 PRINT "WANT INSTRUCTIONS";
0055 PRINT "TYPE YES OR NO";
0060 INPUT A$
0070 IF A$="YES" GOSUB 1500
0100 REM *** SET LIMITS **
0110 DIM L(9,9)
0200 REM *** GENERATE BOARD ***
0205 REM *** GENERATE LINE 1 ***
0210 FOR C=1 TO 8 STEP 2
0220 L(1,C)=1
0230 L(1,C+1)=2
0240 NEXT C
0245 REM *** GENERATE LINES 2 THROUGH 8 ***
0250 FOR C=1 TO 8 STEP 2
0255 L(2,C)=4
0260 L(2,C+1)=1
0265 L(3,C+1)=4
0270 L(3,C)=1
0275 L(4,C)=4
0280 L(4,C+1)=1
0285 L(5,C)=1
0290 L(5,C+1)=4
0295 L(6,C)=4
0300 L(6,C+1)=1
0305 L(7,C)=1
0310 L(7,C+1)=4
0312 L(8,C)=4
0315 L(8,C+1)=1
0320 NEXT C
0325 REM *** SET UP FOX INITIAL POSITION ***
0330 L(8,5)=3
```

out the computer's moves for the player.

The screen is cleared and homed by line 405. Next, the board is printed out by lines 410 through 530. Line 406 branches to the subroutine that prints the computer's moves for the player. During printing of the board, the letters X, H, F and O are printed, dependent upon the value in the array position. The X indicates a square that cannot be moved onto; the H is the position of a hound; the F is the fox's position; and the 0 is a vacant square that can be occupied by a

I used the designations F and H for the fox and hounds rather than the conventional R (red) and B (black) because this made the pieces easier to track.

The board is printed out after each move. After each printout, lines 540 and 560 test for a win by either the computer or the human.

Lines 600 through 640 obtain the player's move. Each move requires two coordinates to tell which hound is to be moved. Two more coordinates are required to tell where the player wants to move the hound. The required format is line first, then column, for all coordinates.

The validity of the move is tested by lines 650 through 710. Valid moves can be only one space forward and one diagonally, right or left. The space the player wants to move to must also be vacant (indicated by the presence of a 4 in the position of the array). The screening also verifies that the player is attempting to move only a hound, which is indicated by a 2 in the position of the array, the position being the "from" (F,F1) coordinates for the hound test. The "to" test is made on the T,T1 coordinates.

If the tests prove the move is valid, lines 720 and 730 reverse the position of the hound and the vacant square in the array. Thus the hound is moved.

The computer moves next. Lines 903 through 940 randomize the left-right diagonal movement of the fox. Without this, movement would always be either diagonally left or right, depending upon which came first in the program, and the fox's moves would be too predictable. The Q variable is used to assure that all possible moves are tested. Forward moves are always tested before backward moves are attempted. (Remember, the fox is trying to get to line one.)

Lines 950 through 1270 do the actual testing and moving for the fox. This is one of the places the variables X, Y, A and B are used to keep track of the fox's position. In each of the four possible moves, the position to be attained is tested for vacancy. If it's vacant, the fox is moved.

Next, the space the fox was in is changed to a vacant space (4). If no vacant space is found for the move being tested, the value of Q tells the program which move to try next until all move possibilities are exhausted. If no more moves are available, the variable Z will be set to 1 by line 1170 or 1260, indicating to line 560 in the board printout that the human has won the game. It also causes a computer-move printout of I CAN'T MOVE.

If, however, the computer can find a valid move, the values of X and Y are left holding the position in the array for the moved-to position. The values of A and B retain the moved-from position in the array. All of these are used later to print out the computer's move.

Playing the Game

A run of the program is included. It shows what the board looks like and how the computer requests moves from the player. Each line is numbered for convenience; each column is numbered below the column. The com-

```
0335 REM *** LOCATION HOLDERS ***
0340 X=8
0350 Y=5
0360 A=X
0370 B=Y
0400 REM *** CLEAR SCREEN AND PRINT BOARD ***
0405 PRINT CHR$(16); CHR$(22)
0406 GOSUB 1400
0410 FOR L=1 TO 8
0420 FOR C=1 TO 8
0430 IF L(L,C)=1 PRINT"X ";
0440 IF L(L,C)=2 PRINT"H ";
0450 IF L(L,C)=3 PRINT"F";
0460 IF L(L,C)=4 PRINT"O ";
0470 NEXT C
0480 PRINT " L":L
0490 NEXT L
0500 FOR K=1 TO 8
0510 PRINT K;
0520 NEXT K
 0530 PRINT
0535 REM *** TEST FOR COMPUTER WIN ***
0540 IF X=1 GOTO 1350
0550 REM *** TEST FOR HUMAN WIN ***
0560 IF Z=1 GOTO 1300
0600 REM *** HUMAN MOVES ***
0610 PRINT "YOUR MOVE FROM(LINE, COLUMN)";
0620 INPUT F,F1
0630 PRINT "TO ";
0640 INPUT T,T1
0645 REM *** TEST FOR VALID MOVE **
0650 IF T < F PRINT"YOU CAN'T MOVE BACKWARDS"
0655 IF T < F GOTO 600
0660 IF T-F <> 1 GOTO 700
0680 IF L(F,F1) <> 2 GOTO 700
0690 IF L(T,T1)=4 IF L(F,F1)=2 GOTO 720
0700 PRINT "INVALID MOVE"
0710 GOTO 600
0715 REM *** MOVE IS VALID -- MOVE PLAYER ***
0720 L(T,T1)=2
0730 L(F,F1)=4
0900 REM *** COMPUTER MOVES ****
0903 Q=0
0905 K=INT(RND(0)*2)
0910 IF K > 2 GOTO 905
0930 IF K=1 GOTO 950
0940 IF K=0 GOTO 1060
0945 REM *** TEST (1) FORWARD:(1) LEFT ***
0950 Q=Q+1
0953 X=A-1
0955 Y=B-1
0960 IF L(X,Y)=4 L(X,Y)=3
0970 IF L(X,Y) <> 3 IF Q <> 2 GOTO 1060
0975 IF L(X,Y) <> 3 IF Q=2 GOTO 1100
0980 IF L(X,Y)=3 L(X+1,Y+1)=4
0990 IF L(X,Y)=3 GOTO 400
1050 REM *** TEST (1) FORWARD (1) RIGHT ***
1060 X=A-1
1062 Y=B+1
1065 Q=Q+1
1070 IF L(X,Y)=4 L(X,Y)=3
1080 IF L(X,Y) <> 3 IF Q < 2 GOTO 950
1082 IF L(X,Y) <> 3 IF Q=2 GOTO 1100
1085 IF L(X,Y)=3 L(X+1,Y-1)=4
1090 IF L(X,Y)=3 GOTO 400
1100 REM *** COMPUTER MOVES BACKWARDS ***
1101 IF K=0 GOTO 1105
1102 IF K=1 GOTO 1200
1104 REM *** TEST (1) BACK (1) RIGHT ***
1105 Q=Q+1
1110 X=A+1
1115 Y=B+1
1120 IF L(X,Y)=4 L(X,Y)=3
1130 IF L(X,Y) \le 3 IF Q \le 4 GOTO 1200
1150 IF L(X,Y)=3 L(X-1,Y-1)=4
1160 IF L(X,Y)=3 GOTO 400
1170 IF L(X,Y) <> 3 Z=1
1180 GOTO 400
1200 REM *** TEST (1)BACK (1) LEFT ***
1210 Y=B-1
1211 X=A+1
1215 Q=Q+1
1220 IF L(X,Y)=4 L(X,Y)=3
1230 IF L(X,Y) <> 3 IF Q <4 GOTO 1105
1240 IF L(X,Y)=3 L(X-1,Y+1)=4
1250 IF L(X,Y)=3 GOTO 400
1260 IF L(X,Y) <> 3 Z=1
1270 GOTO 400
1300 REM *** HUMAN WINS ***
1310 PRINT "YOU WIN . . . WANT TO PLAY AGAIN ":
```

puter moves are printed above the board; the request for the player's move is printed below the board. The request for the move contains a reminder to type line and then column in that order.

The printout of the board shows all of the vacant squares as represented by the letter O. Nonvalid squares are represented by the letter X. The player can move onto

COMMA COLUMN NUMBER OF THE MAN YOU WANT TO MOVE.

any vacant square in the line which is one line greater than the line and one column diagonally from the current position of the hound to be moved (standard checker move). I did not include any nonvalid moves in the run; however, the screening does work.

That about covers the game. Good luck to the hounds! ■

```
1320 GOTO 1370
1350 REM *** COMPUTER WINS ***
1360 PRINT "I WIN . . . WANT TO PLAY AGAIN";
1370 INPUT AS
1380 IF A$="YES" GOTO 200
1390 END
1400 REM *** PRINT COMPUTER MOVE ***
1405 IF A=X GOTO 1440
1406 IF Z=1 PRINT"I CAN'T MOVE"
1407 IF Z=1 GOTO 1440
1410 FRINT "I MOVED FROM ";A;" ";B;"TO ";X;" ";Y
1420 A=X
1430 B=Y
1440 RETURN
1500 REM *** INSTRUCTIONS ***
1505 PRINT CHR $(16); CHR $(22)
1510 PRINT "YOU ARE THE HOUNDS."
1520 PRINT "YOU HAVE 4 PLAYERS (H)."
1530 PRINT "YOU CAN MOVE FORWARD ONLY."
1535 PRINT
1540 PRINT "THE COMPUTER IS THE FOX (F)."
1550 PRINT "THE FOX CAN MOVE BACK AND FORWARD,"
1555 PRINT
1560 PRINT "IF YOU TRAP THE FOX YOU WIN."
1570 PRINT "IF THE FOX GETS TO LINE 1"
1580 PRINT "THE COMPUTER WINS."
1590 PRINT "TYPE A RETURN TO CONTINUE";
1600 INPUT A$
1610 PRINT CHR$(16); CHR$(22)
1620 PRINT "TO PLAY. .WHEN IT IS YOUR MOVE"
1630 PRINT "TYPE IN THE LINE NUMBER"
1640 PRINT "COMMA COLUMN NUMBER OF THE"
1650 PRINT "MAN YOU WANT TO MOVE."
1655 PRINT
1660 PRINT "THEN WHEN I ASK TO?"
1670 PRINT "TYPE IN LINE NUMBER"
1680 PRINT "COMMA COLUMN YOU WANT TO"
1690 PRINT "MOVE TO. GOOD LUCK"
1700 PRINT "TYPE A RETURN WHEN READY";
1710 INPUT A$
1720 RETURN
```

RUN

DO YOU WANT INSTRUCTIONS
TYPE YES OR NO? YES

YOU ARE THE HOUNDS.
YOU HAVE 4 PLAYERS (H).
YOU CAN MOVE FORWARD ONLY.

THE COMPUTER IS THE FOX (F).
THE FOX CAN MOVE BACK AND FORWARD.

IF YOU TRAP THE FOX YOU WIN.
IF THE FOX GETS TO LINE 1
THE COMPUTER WINS.
TYPE A RETURN TO CONTINUE?

TO PLAY..WHEN IT IS YOUR MOVE
TYPE IN THE LINE NUMBER.

THEN WHEN I ASK TO? TYPE IN LINE NUMBER (Program continues until . . .) COMMA COLUMN YOU WANT TO MOVE TO. GOOD LUCK I MOVED FROM 5 2 TO 1 TYPE A RETURN WHEN READY? 0 X 0 L1 X 0 X 0 X HXHXHXH X 0 X 0 X 0 X L2 H XOXOXO L2 X X H X 0 X 0 X 0 L3 X 0 X OX 0 1 3 X 0 F X H X 0 X 0 X 1 4 0 X 0 X 0 X L4 X X 0 X H X 0 X 0 L5 **L**5 0 X O X 0 X 0 0 X 0 X 0 X 0 X L6 0 X O X 0 X 0 X L6 X 0 X 0 X X 0 L7 L7 0 X 0 X 0 X 0 0 X 0 X 0 X 0 X 18 n XOXF X n X 18 3 4 5 6 7 8 1 2 2 3 4 5 6 7 8 YOUR MOVE FROM(LINE, COLUMN) ? 4,3 YOUR MOVE FROM(LINE, COLUMN) ? 1,4 TO ? 5,2 TO ? 2,3 I CAN'T MOVE FROM 8 5 TO 7 MOVED 0 X X 0 X L 1


XHX H L 1 HXO X 0 X L2 X H X 0 X 0 X 0 X 0 X X H L2 X H X 0 X 0 X 0 1 3 X OX 13 X 0 X 0 0 F X 0 X 0 X 0 X L4 0 0 X 0 X 0 X L4 H X 0 X 0 L5 X X X H X 0 X 0 X OX n L5 0 X 0 0 X 0 L6 X X X O X O X L6 \cap 0 X 0 0 L7 X X 0 X 0 X 0 X 0 X F X L7 0 X 0 X O X 0 X L8 XOXOXO L8 X 1 2 3 4 5 6 7 8 2 3 4 5 6 7 8 YOU WIN...WANT TO PLAY AGAIN ? NO YOUR MOVE FROM(LINE, COLUMN) ? 1,2 TO ? 2,1 READY

Sample run.

COSMACMP

\$249 gets the entire family into creating video games, graphics and control functions.

For starters.

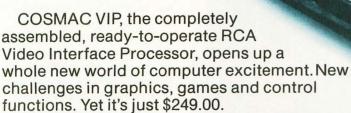

Easy to buy. And easy to program, thanks to its unique, easy-to-use interpretive language. You get a complete how-to book including programs for 20 games: fun, challenging, and ready to load and record on your cassette.

Simple but powerful.

Built around an RCA COSMAC microprocessor, the VIP is a complete computer system that can grow with you. It has 2K of RAM, expandable on-board to 4K. Plus a ROM monitor, audio tone output to a built-in speaker, power supply, and 8-bit input and output ports for control of relays, sensors, or other peripherals.

Soon RCA will offer options for color graphics and 256 tone sound generation. An optional auxiliary keyboard will open up an exciting world of two-player games.

Take the first step now.

Check your local computer store or electronics distributor for the VIP. Or contact RCA VIP Marketing, New Holland Avenue, Lancaster, PA 17604. Phone (717) 291-5848.

*Suggested retail price. Does not include video monitor or cassette recorder.

The fun way into computers.



Baudot Interface Cookbook

A \$50 printer? A simple junk-box interface and 500 bytes can put any Baudot teleprinter on line.



The Teletype model 15 printer and stand, harnessed to an 8080.

J. R. Haglund W. B. Reed NADS Engineering 4401 SE Rockwood Milwaukie OR 97222

After spending nearly two thousand dollars on our microcomputer system, we still didn't have a hard-copy device. Since we spend a lot of time writing, debugging and running programs (mostly debugging), we decided that we definitely needed a printer.

Cost was the major criterion in our search for the ideal printer, but reliability, flexibility and at least 64-character-perline capability were also considerations. Thumbing through several small-computer magazines, we found that the available printers ranged in price from \$250 for a 40-character dot-matrix printer (unacceptable) to \$900 for a reworked ASR Teletype* (too expensive) to over \$1500 for a fancy line printer (dream on). There had to be a cheaper way to get hard copy.

An extensive computer analysis of the cost/ performance trade-offs yielded a system that has cost and simplicity in its favor. The system generates

^{*}Teletype—Trademark, Teletype Corp.

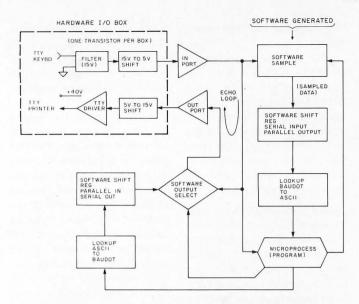


Fig. 1. General view of how the system works. The only hardware is inside the dash-outlined box. Note that the echo loop bypasses the main program to allow maximum Baudot keyboard input speed.

the hard copy utilizing a Baudot teleprinter—the standard machine of the news and wire-service (they're often heard banging away during local news broadcasts). They are available on the surplus market in prices ranging down from \$50.

System Description

We have developed an inexpensive interface that consists of one Baudot teleprinter, a hardware input/output box containing only a few resistors and transistors and a software package consisting of about 500 bytes in 8080 code. The required low cost is achieved by use of virtually free timed software to receive, decode and transmit the serial Baudot data. This reduces the need for expensive parallel-to-serial hardware logic. Refer to Fig. 1 for a general flowchart of the system.

Features of the interface are:

- 1. Low cost—under \$20 for parts and wire if you must purchase everything.
- Simple hardware—uses a basic two-transistor circuit for the required input and output drivers.
- 3. Simple software—consists of 500 bytes of 8080 code and may be adapted to system requirements.
 - 4. Minimal modifications-

software eliminates expensive parallel-to-serial converters and utilizes a spare bit on existing input and output ports.

- 5. Expanded character set—software simulates output of most required math characters not existing on the Baudot, without any hardware modifications.
- 6. Baudot keyboard input—during program executions or input of data, the interface conveniently accepts Baudot keyboard data.
- 7.STOP—program execution may be stopped by depressing the Baudot *break* key.
- 8. Punched tape—several Baudot machines have tape drives and punches, and there are separate perforation/readers available.

Sound too good to be true? It is! This is the cheapest hard copy you can find; it requires almost no hardware and outputs an expanded character set. We will touch upon the basics of the Baudot machine and present all detailed documentation required for the implementation of the system. Also included are certain start-up and troubleshooting hints.

How the Baudot Printer Works

The Baudot teleprinter is a serial device; each letter is a set of five binary-code bits (not including the start and stop bits)

as shown in Fig. 2. (The letter R is shown for reference.) Note that start bits are always logic low; stop bits are always logic high and stay that way when no data is present.

Baudot machines have a limited character set (see Fig. 3) and are not compatible with ASCII. Since math symbols are a must with most programs, we used some software tricks in the interface. Fig. 4 shows the expanded ASCII/Baudot character set chosen for our particular requirements. Be forewarned that there are some minor differences between uppercase Baudot characters. On our three machines there are three figures, the pound sign, apostrophe and STOP, that are interchanged, Simple modifications of the software lookup table, described later, will solve this problem.

One beautiful feature found on the Teletype model 19 is the STOP button. When the STOP code is sent, the machine turns itself off, and upon receiving a low bit, the machine will automatically power-on! This allows for total remote control from the computer terminal.

A guick review of the workings inside the machine is now in order. The serial binary pulses open and close a set of selector magnets, which in turn select the proper character to by typed. Current flowing through the magnets holds the selector bars from moving; the absence of current allows them to begin selecting a character. In effect, each code bit opens and closes the magnets, mechanically selecting a character. All code bits are the same time length regardless of how

fast the printer is operating. Faster typing simply generates more of the five bit words per given time period, up to 60 wpm. The keyboard has a set of five switches that run off five timing cams. When depressed, each letter selects the proper array of cams to open and close the switches, generating the code word.

Unfortunately, the Baudot machine has several limitations compared to ASCII. First, numerals and special characters are all in the uppercase mode. Typing a period, for example, takes three discrete moves. Fortunately, the computer does all the shifting when ASCII keyboard or output is run through the program. Second, no math characters exist on the Baudot. As mentioned, Fig. 4 shows our equivalent set.

Third, most Baudots run at 60 wpm (45 baud), at which some hard-core computer freaks will scoff. Since most of us have more time than money, 60 wpm is perfectly acceptable. Beware when selecting a machineseveral different speeds are available. Sixty wpm printers comprise the vast majority, but some 75 and 100 wpm machines may be found. The output program will work on all; however, one must change the software timing cycles to sample the faster data.

A word to the wise: If you are starting this from scratch, you had better buy a reference book on teleprinters. (Books may be found in most ham radio stores.) A few special adjustments and problems that simply cannot be covered in the scope of this article may exist in the printer.

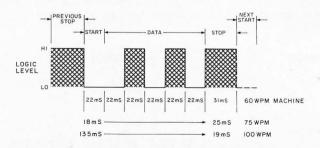


Fig. 2. The Baudot timing diagram consisting of five binary-code words and the start and stop pulses. Shaded portions represent current flow through the printer magnets. Times for higher-speed machines are shown for reference.

Software

The software accepts, processes and transmits the serial Baudot data. The three main programs, Status, Input and Output, are designed so that they may be easily interfaced to the input and output schemes of your BASIC interpreter or assembler, which will be described later. The functions of the Status, Input and Output routines are described below. It should be noted that the software allows input from both an ASCII keyboard and the Baudot teleprinter. Also, the program will output to either or both the printer and a video monitor.

Status. Status checks for data availability on both the Baudot printer and the ASCII keyboard as shown on the flow-chart in Fig. 5. If data is available, Status returns with the zero condition bit reset; if data is not available, the zero condition bit is set. This convention is compatible with most software and hardware configurations used today. Status also keeps track of at which keyboard the data availability occurred; this informa-

| | Baudot Cha | ıracter | Baudot code Signal | | | |
|-------|-------------|-----------|--------------------|-----|--|--|
| | Lowercase | Uppercase | Binary | Hex | | |
| | Α | | 00011 | 03 | | |
| | В | ? | 11001 | 19 | | |
| | С | | 01110 | 0E | | |
| | D | \$ | 01001 | 09 | | |
| | E | 3 | 00001 | 01 | | |
| | F | ! | 01101 | 0D | | |
| | G | & | 11010 | 1A | | |
| | Н | # | 10100 | 14 | | |
| | -1 | 8 | 00110 | 06 | | |
| | J | , | 01011 | 0B | | |
| | K | (| 01111 | 0F | | |
| | L |) | 10010 | 12 | | |
| | M | | 11100 | 1C | | |
| | N | , | 01100 | 0C | | |
| | 0 | 9 | 11000 | 18 | | |
| | P | 0 | 10110 | 16 | | |
| | Q | 1 | 10111 | 17 | | |
| | R | 4 | 01010 | 0A | | |
| | S | BELL | 00101 | 05 | | |
| | T | 5 | 10000 | 10 | | |
| | U | 7 | 00111 | 07 | | |
| | V | ; | 11110 | 1E | | |
| | W | 2 | 10011 | 13 | | |
| | X | 1 | 11101 | 10 | | |
| | Υ | 6 | 10101 | 15 | | |
| | Z | " | 10001 | 11 | | |
| | Space | | 00100 | 04 | | |
| | Carriage Re | turn | 01000 | 02 | | |
| | Line Feed | | 00010 | 02 | | |
| Shift | Uppercase | | 11011 | 1B | | |
| Jilit | Lowercase | | 11111 | 1F | | |
| | | | | | | |

Fig. 3. Baudot character set as found on the machine. Some differences may exist in the uppercase characters. In this scheme, least significant bits in the binary table are to the right.

| INPUT | OUTPUT | ASCII ≠ | BAUDOT |
|-------|--------|---------|-------------------------|
| ~ | - | + | & |
| | ~ | > | GT |
| | ~ | < | LT |
| | ~ | = | EQ |
| ~ | ~ | * | X |
| ~ | | CNTRLC | BREAK (in letters mode) |
| ~ | | DELETE | BREAK (in numbers mode) |

Fig. 4. The expanded character set chosen for the interface. Note that not all characters may be used both on input and output.

tion is used by the Input routine.

Data availability occurs on the ASCII keyboard when the input strobe from the keyboard forces a bit to go low on the input status port. (Note: If your status bit normally forces the status bit to a high logic level, the CMA operation shown at address F007 should be changed to a NOP.)

Data availability occurs on the Baudot when the normally active stop signal (logic high) changes to a start signal (logic low) for a duration of 22 ms. Status, therefore, looks for the input signal to go low. Since an unknown interference could have momentarily caused a low signal, the routine samples the signal 162 times during the 22 ms start interval. If at least half of these samples are low, the routine returns with data-availability status. If not, the routine decides that the start signal was not legitimate and returns with the data-not-available status.

Input. The function of the Input routine is to return with the ASCII-encoded data in the accumulator register (see the flowchart in Fig. 6). Input first checks which device—either the Baudot or the ASCII keyboard—generated the data-available signal using a flag provided in the Status routine.

If the ASCII keyboard is

guilty, the procedure is trivial. The routine simply inputs off the keyboard port, masks off the parity (most significant) bit and returns with this in the accumulator.

If the source is the Baudot machine, the procedure is a little more complicated. The first step is to accept the incoming Baudot data. Each of the five bits that define the Baudot code are of the same 22 ms duration. The timed software samples the logic state of each bit 163 times during the 22 ms interval. Since there may have been extraneous noise (a remote possibility) during transmission, the true logic state is decided by a democratic process called plurality or majority rule. As each bit is received it is put sequentially into a software shift register until all five data bits are received. Additionally, during sampling, the input signal is echoed directly back to the teleprinter to allow for instant keyboard-printer operation.

Each key on the Baudot has an alphabetic and figure mode driven by keyboard shifts prefixed by the LET and FIG keys respectively. Therefore, the software must check the previous state of the carriage mode before it can begin to determine the ASCII equivalent,

Once the mode is established, the software uses the lookup table (described later) to

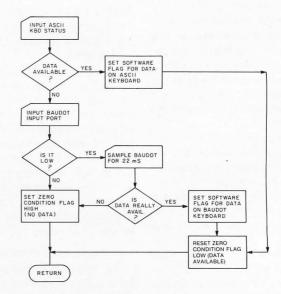


Fig. 5. Status routine flowchart establishes which keyboard has input data.

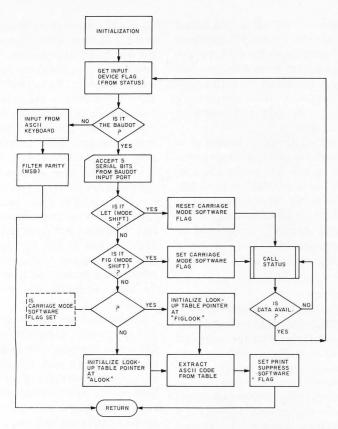


Fig. 6. Input routine flowchart represents logic followed by computer in setting up the Baudot input, finding letters or characters and returning ASCII to main programs.

extract the ASCII value of the Baudot code. Note that the input from the Baudot is limited by the machine's hardware (exceptions are noted in Fig. 4). For example, lowercase letters are not possible. Input from the Baudot is mainly a convenience feature for inputting data during program executions and Star Trek marathons. It is assumed that the ASCII keyboard will be the one predominantly used due to its simplicity of operation.

To simulate mathematical symbols not found on the Baudot keyboard, certain Baudot characters were sacrificed. The plus and * operations were converted to & and X, respectively, during all interactions with the Baudot machine. As an added feature, the BREAK (NOP) key found on most machines is used to generate an ASCII CONTROL C in the letter mode or an ASCII DELETE when in the figure mode.

Output. The output routine converts the ASCII data in the accumulator to Baudot code

and outputs it serially to the Baudot machine (see Fig. 7). The Baudot code is obtained via the lookup table (explained in detail in the lookup table section). Since each Baudot code represents two possible characters depending on the status of the carriage shift, the software checks and, if necessary, changes the carriage shift by generating the LET or FIG code as appropriate. For example, if the teleprinter is in letters mode and the computer wants to type a 5, the software must generate a shift character (the FIG key) prior to generating the Baudot code for a 5.

Before outputting the five-bit Baudot code, the software sets up the hardware-required start and stop signals immediately preceding and following the code. This is done by putting the binary sequence 11DDDDD0 in a register. D represents the Baudot code; 0 is the start signal (logic low) and 11 stands for the stop signal (logic high). This register is then shifted out one bit at a time 22 ms per bit to the output port. At this point, the

I/O box takes over and drives the magnets of the Baudot machine to generate the required character.

Since the teleprinter does not have >, < and = in its character set, the software converts these to GT, LT and EQ (pseudo-FORTRAN fashion).

Lookup table. To make it extremely simple and efficient, the lookup table is divided into two sections starting at addresses ALOOK and FIGLOOK. Using the Baudot code as the base during input, the code word's numeric value is added to the address of ALOOK or FIGLOOK depending upon the status of the carriage shift. The contents of this address is the ASCII code. To clarify, assume that the Baudot carriage is shifted to figures mode and you type an 8 on the Baudot. The Baudot code for 8 (see Fig. 3) is binary code 00110 or 6. The contents of FIGLOOK plus 6 is 38 hex, which corresponds to the ASCII code for 8.

To determine the Baudot code for a given ASCII code

(during output), the opposite procedure is used. Starting at address ALOOK, a search is made for the ASCII code. When a match occurs the address bias is removed, and the Baudot code remains.

Sampling technique. Earlier versions of this software used a single sample at the center of each 22 ms data bit transfer during input from the Baudot machine. Although this method was nearly 100 percent reliable for our system, we realized that for general systems it was probably too susceptible to glitches. We developed a more refined technique using multiple sampling.

During each 22 ms bit transmission period, the logic state on the input bit is sampled 163 times, and the state of the data is accumulated in a counter until the interval is over. If the count is greater than 81, it is concluded that the bit is a logic 1. If not, the bit is assumed to be a logic 0. This software feature, in turn with the hardware design features, effectively


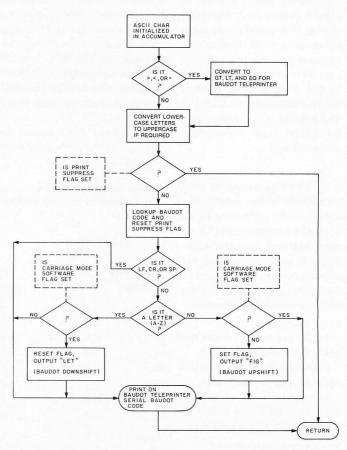


Fig. 7. Output flowchart shows the ASCII to Baudot conversion, generation of special characters and software serial shift out.

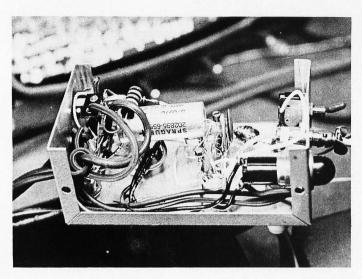

Close-up of the hardware box required for I/O. This prototype box was assembled on a recycled chassis from junk-box parts. Note that the heavy cable to the printer enters on the left near the output driver, while the input driver and its cables are on the right.

mitigates the effect of any stray signals.

At the same time the input data is sampled, it is echoed back to the teleprinter. This allows the typist to go at full 60 wpm speed since the echo is part of the input routine. The Output software suppresses echo during output in order to prevent double echo. We decided that this scheme was more acceptable than having the software process the serial input and then echo it back in the Output routine. This method would effectively cut speed to 30 wpm and result in annoying (as found from experience) printer delays.

Software/hardware compatibility. Since hardware I/O configurations differ widely, the software has provisions to allow it to be customized to individual systems. Your configuration will probably not be the same as ours; therefore, look at the following addresses to make necessary modifications.

ASCII keyboard:

- 1. Address F006 contains the ASCII keyboard status port.
- 2. Address F009 contains the ASCII keyboard status bit.
- Address F007 should be changed to 00 if your status bit goes high on data availability.

Baudot teleprinter input:

1. The input signal from the I/O box is put into a spare bit

on a parallel port. Note: A synchronous logic gate bit (e.g., an 8212) won't work. You must use a status type bit that can follow asynchronous logic. We used a spare status bit on our Tarbell cassette interface. The software requires that the incoming signal be rotated to bit 0 (LSB) in the Inshift subroutine (address F046). Plenty of NOPs have been provided for this purpose. Naturally, these must be changed to ROTATE instructions as necessary. A CMA instruction may also be required by your particular system at address F04C.

2. Address F047 should be changed to the address of your Baudot input port.

Baudot teleprinter output:

1. Output to the teleprinter

occurs in a subroutine called Outshift. The signal to be transmitted enters the subroutine in bit 0 (LSB). If the teleprinter output bit differs from this, you must add the necessary rotates to set the data in the proper bit location.

- 2. Our output hardware is such that the logic state on the output bit was inverted. This required a CMA at location F052. This CMA may be changed to a NOP for your hardware.
- 3. Address F054 should be changed to the address of your Baudot output port.

Computer speed and wait states:

This software* was written in 8080 code for use with a system utilizing a 2 MHz frequency (500 ns cycle time) and no wait states. If your system differs, certain critical timing parameters must be changed to accommodate your system. Fig. 8 shows what these timing parameters should be for a variety of possibilities. Incidentally, this software is PROMable with the exception of the program flags at locations PORT-SEL, MODFL and SUPFL.

Video driver:

A patch is provided at address F16E for calling a video driver or another output driver (another Baudot?). The contents of addresses F16F and F170 should be changed to the location of your driver to prevent an immediate bomb.

Hardware I/O Box

As intended, the hardware

I/O box is a trivial driver circuit (see Fig. 9). First, a giant shortcut was taken with the driver: Only 40 V dc is used to run the printer magnets. Traditionally, 150 V dc is used in the older teleprinter circuits. 40 V dc is the absolute minimum and works, basically because the pulse timing and noise levels of the computer are excellent compared to what is required to run the machine. This lower voltage allows for cheaper and safer operation of the machine. Both a model 15 and 19 Teletype and a Western Union teleprinter were tested and found to work perfectly off this voltage.

Moving on—the output portion of the circuit is a simple Darlington amplifier and level shifter. Although such a highgain circuit is not required with high-quality exacting-specification transistors, such components can rarely be found in the average junk box. The diode across the output collector circuit protects the transistor from inductive kickback voltages produced by the printer magnets.

Next, the input circuit is also an amplifier-level shifter. The capacitor and resistor input circuit is a tuned PI network, allowing passage of Baudot characters while preventing feedback of stray printer glitches, computer radiation and CB "good buddies" from bombing the CPU. Don't vary the timing circuit components too much or you may also remove the Baudot input!

*Program has been tried on a Z-80 CPU and works without any modifications.

Your system

Change these addresses as shown

| Teleprinter Speed | Computer Cycle Time | Wait States | F017 | F01C F06E | F069 | F0B2 F168 | F0B3 F169 | F18E | F18D |
|----------------------|------------------------|----------------|------|--------------|------|--------------|--------------|------|------|
| 60 wpm | 0.5 us | 0 | A2 | 51 | А3 | 44 | 48 | 59 | 06 |
| 60 | 0.5 | 1 | 82 | 40 | 81 | 6C | 39 | 09 | 05 |
| 60 | 0.5 | 2 | 6B | 35 | 6A | 9E | 2F | 2C | 04 |
| 60 | 1.0 | 0 | 52 | 29 | 51 | 22 | 24 | 29 | 03 |
| 60 | 1.0 | 1 | 41 | 20 | 40 | B6 | 1C | 82 | 02 |
| 75 wpm | 0.5 us | 0 | 83 | 41 | 82 | DA | 39 | 12 | 05 |
| 75 | 0.5 | 1 | 68 | 34 | 67 | F0 | 2D | 06 | 04 |
| 75 | 1.0 | 0 | 42 | 21 | 41 | D8 | 1C | 86 | 02 |
| 100 wpm | 5.0 us | 0 | 63 | 31 | 62 | 5C | 2B | CC | 03 |
| 100 | 0.5 | 1 | 4E | 27 | 4D | 74 | 22 | 02 | 03 |

Fig. 8. Examples of timing changes required for different computer cycle times.



OSBORNE & ASSOCIATES, INC.

The World Leaders In Microprocessor Books

If you want information on microprocessors, begin with the Osborne books.

ASSEMBLY LANGUAGE PROGRAMMING

8080A/8085 Assembly Language Programming 6800 Assembly Language Programming

These books describe how to program a microcomputer using assembly language. They discuss classical programming techniques, and contain simplified programming examples relevant to today's microcomputer applications.




PROGRAM BOOKS WRITTEN IN BASIC

Payroll With Cost Accounting Accounts Payable And Accounts Receivable General Ledger

#31003, 32003 (400 pages each)

These books may be used independently, or implemented together as a complete accounting system. Each contains program listings, user's manual and thorough documentation. Written in an extended version





Some Common BASIC Programs

76 short practical programs, most of which can be used on any microcomputer with any version of BASIC. Complete with program descriptions, listings, remarks and exam-

#21002 (200 pages)

10 books or less.



AN INTRODUCTION TO MICROCOMPUTERS





If you know nothing about computers, then this is the book for you. It introduces computer logic and terminology in language a beginner can understand. Computer software, hardware and component parts are described, and simple explanations are given for how they work. Text is supplemented with creative illustrations and numerous photographs. Volume 0 prepares the novice for Volume I. #6001 (300 pages)

Volume 0 - The Beginner's Book





Volume I — Basic Concepts

This best selling text describes hardware and programming concepts common to all microprocessors. These concepts are explained clearly and thoroughly, beginning at an elementary level. Worldwide, Volume I has a greater yearly sales volume than any other computer text. #2001 (350 pages)

Volume II - Some Real Products (revised June 1977)

Every common microprocessor and all support devices are described. Only data sheets are copied from manufacturers. Major chip slice products are also discussed. #3001A (1250 pages)

PROGRAMMING FOR LOGIC DESIGN



8080 Programming For Logic Design 6800 Programming For Logic Design **Z80 Programming For Logic Design**

These books describe the meeting ground of programmers and logic designers; written for both, they provide detailed examples to illustrate effective usage of microprocessors in traditional digital applications.

#4001, #5001, #7001 (300 pages each)

| 1 | These prices effective July 1, 1978. | PRICE | QTY | AMT |
|----------|--|----------------|------------|-----|
| 6001 | Volume 0 — The Beginner's Book | \$ 7.95 | | |
| 2001 | Volume I — Basic Concepts | \$ 8.50 | | |
| 3001A | Volume II — Some Real Products | \$15.00 | | |
| 4001 | 8080 Programming for Logic Design | \$ 8.50 | | |
| 5001 | 6800 Programming for Logic Design | \$ 8.50 | | |
| 7001 | Z80 Programming for Logic Design | \$ 8.50 | | |
| 31003 | 8080A/8085 Assembly Language Programming | \$ 8.50 | 211 | |
| 32003 | 6800 Assembly Language Programming | \$ 8.50 | | |
| 21002 | Some Common BASIC Programs | \$ 8.50 | fra to I | |
| 22002 | Payroll With Cost Accounting | \$15.00 | | |
| 23002 | Accounts Payable and Accounts Receivable | \$15.00 | | |
| · 6½%, | SF Bay Area residents only | | TOTAL | |
| • 6%, Ca | lifornia residents outside SF Bay Area | | Sales Tax | |
| · Paymer | nt by check or money order | (Calif. reside | ents only) | |
| | pe enclosed for orders of | Shipping | Charges | |

TOTAL AMOUNT ENCLOSED

| • | OSBORNE & ASSOCIATES, INC. P.O. Box 2036 DEPT. D5 Berkeley, California 94702 | (415) 548-2805 TWX 910-366-7277 |
|------|---|------------------------------------|
| NAN | ME . | |
| ADD | DRESS | |
| CITY | • | |
| STA | TE ZIP | PHONE |
| SH | IPPING CHARGES: Shipping for large orders | to be arranged. |
| 0 | All foreign orders, \$3.00 per book, for air shipm 4th class \$0.35 per book (allow 3-4 weeks with discounted orders) | |
| | \$0.75 per book, UPS (allow 10 days) in the U.S. \$1.50 per book, special rush shipment by air in | |
| | ase send information on: | tile U.S. |
| | Becoming an O&A dealer School discounts List of foreign distributors | |

*This book is scheduled to be published during 1978

Please notify me when it is available:

24002 General Ledger

F8

Finally, the requirements of the computer in the I/O schemes are trivial. Only one spare bit on an input and output port is required since the computer generates the serial information. Depending on the nature of your particular output port, a pull-up resistor may be required on the I/O card itself, as shown in the schematic.

That's about it for the I/O box. As we mentioned before, the hardware was kept to a minimum as this tends to be the major stumbling block when people home-build equipment.

Debug and Construction

So now you're geared up to build the interface. Refer to the main schematic diagram (Fig. 9). We recommend that a separate box be used for the I/O hardware to ward off interference between the teleprinter and computer. Anytime one attempts to interface two systems that were designed over 120 years apart, certain incompatibilities are bound to exist (the first teleprinter came on line in 1849!).

Component placement is not critical in the box, and the quickest placement method is to use tie-points or vector board construction. In our opinion, a printed circuit board for such a simple circuit is a waste of time. A good construction practice is to keep the input and output sections physically separated. Lead in and out wires

should also enter as far apart as possible. Shielded wire runs between the box, computer and machine would be a good idea but are only required on the computer input as shown. Keep the box-to-computer input port cable as short as possible (two feet maximum); it must be shielded.

The transistors may be any junk-box variety having at least three good leads. To be on the safe side, we used a 1 Amp power transistor for the output. While a small-signal-type transistor will drive the magnets, it would not survive any accidental short circuiting. All other transistors are general-purpose NPN silicon. The only critical parts are those in the input filter.

Components

RFC. This is not critical, just about any rf choke in the 1 to 10 millihenry range will do.

R1. This may be a difficult component to calculate, since the voltage-current requirements may vary with different teleprinters. With the Teletype model 15 and 19, the resistor is 270 Ohms, 2 Watts. If you are not sure what your machine will need, use a 1000 Ohm, 5 Watt adjustable wire-wound resistor and set it to the proper current (20 to 60 mA on most printers).

Q1. Use a 1 Amp power NPN silicon transistor with a maximum collector voltage of 40 V or greater as required by transformer voltage.

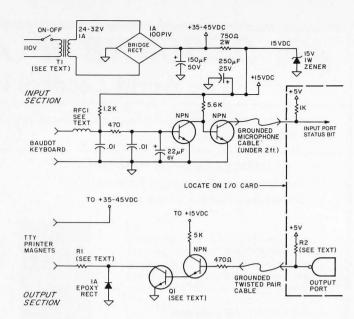


Fig. 9. The trivial hardware required for this interface. Components, with the exception of those in the Baudot keyboard input section, are not critical. Use 1/4 Watt resistors except as noted. Also refer to the photo of the interface box for an example of layout.




Fig. 10. A simple test circuit for initial testing and cleanup of a "new" junk Baudot printer.

R2. Use a 3000 Ohm, ¼ Watt resistor if your port is an open-collector-type output. If you're not sure, use a voltmeter and test for an output voltage at logic high, indicating that it is not the open type.


71. You need a nominal 24 V,1 Amp filament transformer.The Radio Shack 25.2 V trans-

former is an ideal less expensive model. If you don't have a transformer in the junk box and wish to order one, try to buy a 26 to 32 V transformer.

Start-up and Testing.

If this is your first experience with a teleprinter, set up the test circuit shown in Fig. 10 and test for proper operation of all characters. Typing RYRYRY is a good test for proper internal timing. In the rare case that your printer refuses to operate on the 40 V circuit (due to old age or stiff joints), either get a new junk machine or look at higher voltage driver circuits from a book on traditional circuits. (Also, check the 73 Magazine Teleprinter Handbook for ideas on advanced low-voltage driver circuits.)

When satisfied that the printer will talk to itself properly, move on to Test Program 1. This program tests the hardware by simply accepting the serial data on the input port and echoing it back to the printer. Load

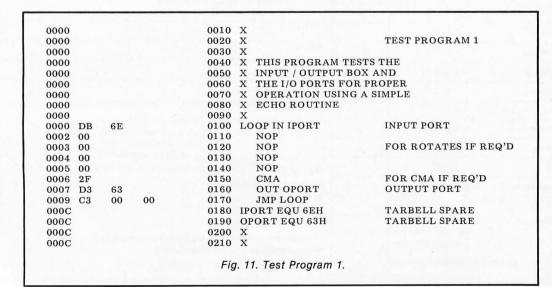

the program shown in Fig. 11 and type from the Baudot keyboard. This program will also test for logic continuity. If your I/O scheme inverts the logic, the printer will jump all over the floor. Simply invert the logic through software in both the test and main programs. Provisions are made for this modification in the subroutines labeled Inshift and Outshift.

When the first program runs satisfactorily, load in the main programs and make any compatibility adjustments as necessary. Next, load and execute Test Program 2 (Fig. 12), which will allow input from either the ASCII or the Baudot keyboard and echo to the video monitor and printer. Test for problemfree input echo both on the screen and teleprinter. Any problems will point to timingloop errors or minor printertiming errors. Some printers have fine-timing adjustments easily tuned to small timing errors. Consistently incorrect characters most likely would be a result of lookup table differences between your teleprinter and ours.

When these tests are complete, you are home free and may proceed to modify your software packages to output hard copy.

Software Interface

If you've made it this far, you are ready to interface the Status, Input and Output routines to your BASIC interpreter or assembler. The first step is to locate the input and output driver sections of your software and modify them as required. Sample modifications are shown in Fig. 13.

Conclusion

Although we've given you the basics of a good, inexpensive hard-copy device, there are many possibilities for future expansion. One such application would be total remote-access capabilities using a more comprehensive character set. Since amateur-radio operators have been using Baudot machines for years, perhaps one may wish to put a computer on the airwaves for Baudot time

share, the same principal may be used over telephone lines.

Although this interface was designed for the Baudot machine, modifications to the lookup table and timing cycles would allow it to be used with any device requiring binary serial data.

If you have questions or problems with our interface, feel free to contact us. We'll provide tapes of the object code assembled to your addressing requirements using the Tarbell or Kansas City Standard (CUTS) interface. Send a \$5 check (\$8 for North Star minifloppy disk) payable to NADS Engineering.■

A Consumers' Guide to Baudots

As a quick guide on which machines to look for, we present the following older printers. Check ham-radio-store bulletin boards for these models. \$50 or less would be a good price for the older machines.

Teletype model 15. The standard of the news services and chosen for our interface.

Teletype model 19. Similar to the model 15, except with auto start/stop and tape punch.

Teletype models 28 ASR & KSR. These units have capabilities of 75 and 100 wpm operation. As these units are newer, a higher price may be paid.

Western Union model 104. We don't have the rundown on Western Union's printers, but this one was given to us and is an excellent, light and quiet printer.

Teletype model 26. Though this unit was not tested with our interface, it should work. These are small and lightweight, with a type cylinder similar to modern printers.

| 0000 | | | 0010 | |
|---------|------|------|------|-----------------------------------|
| 0000 | | | 0020 | |
| 0000 | | | 0030 | |
| 0000 | | | 0040 | |
| 0000 | | | 0050 | X PROGRAMS (STATUS, INPUT, AND |
| 0000 | | | 0060 | X OUTPUT) FOR PROBLEMS ASSOCIATED |
| 0000 | | | 0070 | X WITH HARDWARE COMPATIBILITY |
| 0000 | | | 0080 | X AND TIMING. |
| 0000 | | | 0090 |) X |
| 0000 31 | 1 00 | 0 01 | 0100 | LXI SP,100H |
| 0003 CI | D 00 | 0 FC | 0110 | LOOP CALL STATUS |
| 0006 C | A 0 | 3 00 | 0120 | JZ LOOP |
| 0009 CI | D 5 | 6 FC | 0130 | CALL INPUT |
| 000C CI | D C | 4 F0 | 0140 | CALL OUTPUT |
| 000F C | 3 0 | 3 00 | 0150 | JMP LOOP |
| 0012 | | | 0160 | O SP EQU 6 |
| 0012 | | | 0170 | STATUS EQU 0F000H |
| 0012 | | | 0180 | INPUT EQU 0F056H |
| 0012 | | | 0190 | OUTPUT EQU 0F0C4H |
| 0012 | | | 0200 |) X |
| 0012 | | | 0210 |) X |

| TY | PICAL | | | CHANC | E TO |
|----|----------------------------|------|--|-------|--|
| A. | STATUS | LOOP | IN 0 ANI 40H JZ LOOP | LOOP | CALL STATUS JZ LOOP NOP |
| В. | INPUT | | IN 01 ANI 7F | | CALL INPUT NOP |
| C. | OUTPUT TO PRINTER | LOOP | IN 0 ANI 80H JZ LOOP OUT PORT | | CALL OUTPUT NOP NOP NOP NOP NOP |
| D. | OUTPUT TO VIDEO MONITOR | LOOP | CALL VDM | | CALL OUTPUT |

Fig. 13. Examples of modifications required to interface software with existing system programs.

Baudot to ASCII interface program listing.

| F000 | 0005 X |
|------|--------|
| F000 | 0010 X |
| F000 | 0013 X |

| ROTATE TO BIT 0 FOR CMA IF REQ'D | ROTATE TO OUTPUT BIT FOR CMA IF REQ'D | TIO A TWA WOO GO WITH | - ACCEPTS INFOT FROM AN ASCII ENCODED KEYBOARD OR - CONVERTS INCOMING SERIAL BAUDOT CODE TO ITS ASCII EQUIVALENT | | | ASCII KEYBOARD | CLEAR PARITY | DATA ON ASCII KEYBD H IS COUNTER L IS SHIFT REG | 22 MS COUNTER | PUT CARRY IN MSB | | | | | RIGHT JUSTIFY | SAVE IN C FIG CHAR? | LETTER CHAR? | | | | BAUDOT LOOKUP TBL |
|---|---|--|---|--|--|----------------------------------|---|---|-----------------------|---|---|---------------------|--|---|--|--|---------------------|--|---|----------------------------------|--|
| NOP NOP NOP NOP RET OUTSHIFT NOP | | TUANI | X - ACCEPTS INF X ENCODED KE X - CONVERTS IN X CODE TO ITS X | | INPUT PUSH D PUSH H PUSH B | PS LXI H,PORTSEL IN KBD | ANI 7FH DCR M | JZ INRET LXI H,500H | MVI D,163 CALL SAMPLE | MVI A 81 CMP L RAB | ANI 80H POP H ORA L | RRC MOV L,A | CALL OUTSHIFT DCR H | JNZ ILOOP MOV A,L | RRC | MOV C,A CPI 1BH 17 MODESW | CPI 1FH JNZ ALPL | MODESW CMA ANI 4 | STA MODFL SLOOP CALL STATUS | JZ SLOOP JMP PS | ALPL LXI H,ALOOK LDA MODFL ORA A |
| 0620 0630 0640 0650 0660 0700 | 0730 0740 0750 0760 0770 | 0800 0810 0820 0830 | 0840 0850 0860 0870 0880 | 0890 | 1000 1020 1030 | 1040 | 1060 | 1080 | 1110 | 1140 | 11160 | 1190 | 1216 | 1230 1240 | 1250 | 1280 | 1310 | 1330 1340 | 1370 | $1390 \\ 1410$ | 1420 1430 1440 |
| | | | | | | F1 | | F0 05 | FO | | | Ģ G | FO | FO | | ъ Б | FO | | F1 F0 | F0 F0 | FI FI |
| | 9 8 | | | | | D8 01 | 7F | 8 8 | A3 2C | 16 | 80 | 2 | 4 4 E | 29 | | 1B | 1F 9E | 04 | 00 | 95 59 | 98 D9 |
| | | | | | | m | | 4 - x | 16 CD | BD BD | E6 E1 B5 | OF 6F | CD CD | C2 | 0F 0F | FE AF | FE C2 | 2F E6 | 32 CD | CA C3 | 21 3A |
| | | F056 F056 F056 | F056 F056 F056 F056 | F056 F056 | F056 D5 F057 E5 F058 C5 | | | F061 CA F064 21 F067 F5 | | F06F B | | | | | | F085 | | | | | |
| F049 F04A Y F04B F04C F04C F04E F04E | F050 F051 F052 F053 F053 F055 | A AVAILABILITY SCII KEYBOARD LEPRINTER | F056 F056 F056 F056 | ASCII KBD STATUS F056 ONLY IF BIT LOW F056 | | | | | | | | | F07A O THE F07D | INCOMING F07E NTER F081 | | | | | | | |
| F049 F04A Y F04B F04C F04C F04C | F050 AUGUST 1, 1977 F051 F052 F053 F055 | X STATUS INPUT ROUTINE X - CHECKS FOR DATA AVAILABILITY F056 X ON EITHER AN ASCII KEYBOARD F056 X OR A BAUDOT TELEPRINTER F056 | STATUS PUSH D F056 PUSH H F056 PUSH B F056 MVI E.1 F056 | STATUS ASCII KBD STATUS ONLY IF BIT LOW | ON KBD F057 ON TTY PORT F058 | F050 | F05E 22 MS SAMPLE F060 | 22 THEN DATA F064 | F06A | F06F F070 | SELECT INPUT DEVICE F073 F074 | F075 F076 | SAMPLE ROUTINE FOTA - SAMPLES AND ECHOS TO THE FOTO | BAUDOT MACHINE THE INCOMING SERIAL CODE. L IS COUNTER F001 | COUNTER F083 | | F08A F08C | FT F090 | NNSHIFT F092 DUTSHIFT F095 | P F098 | |
| X BAUDOT TO ASCII INTERFACE F049 X DESIGNED AND DEVELOPED BY F04A X NADS ENGINEERING F04B X SOFTWARE BY JOHN R HAGLUND F04E X HARDWARE BY WILLIAM B REED F04F | X AUGUST 1, 1977 F051 X Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y | X STATUS INPUT ROUTINE X - CHECKS FOR DATA AVAILABILITY X ON EITHER AN ASCII KEYBOARD X OR A BAUDOT TELEPRINTER | | IN TERESTATUS ASCII KBD STATUS CMA ONLY IF BIT LOW | DATA ON KBD F056 F057 INPUT ON TTY PORT F058 | CMA F059 ANI 1 F05C | JZ NODATA F05E WIJ D,162 22 MS SAMPLE F060 | F L LT 22 THEN DATA F064 | RAR CMA | FOGD IMPLIES TTY FOGF FORT | MOV M,E SELECT INPUT DEVICE F071 POP B F073 | POP D F075 RET F076 | X SAMPLE ROUTINE FOTA X -SAMPLES AND ECHOS TO THE FOTO | X BAUDOT MACHINE THE INCOMING X SERIAL CODE. L IS COUNTER F0081 | X SAMPLE MVI L,0 F083 | F084 F085 | ADD L MOV L,A | MOV A,B CALL OUTSHIFT F090 | CALL INSHIFT CALL OUTSHIFT CALL OUTSHIFT F095 | JUCK D F098 JNZ LOOP F09B | F09E F041 |
| X BAUDOT TO ASCII INTERFACE F049 X DESIGNED AND DEVELOPED BY F04A X NADS ENGINEERING F04B X SOFTWARE BY JOHN R HAGLUND F04E X HARDWARE BY WILLIAM B REED F04E | X AUGUST 1, 1977 F051 X Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y | X STATUS INPUT ROUTINE X - CHECKS FOR DATA AVAILABILITY X ON EITHER AN ASCII KEYBOARD X OR A BAUDOT TELEPRINTER | STATUS PUSH D PUSH H PUSH B MVI E.1 | IN KBDSTATUS ASCII KBD STATUS CMA ONLY IF BIT LOW | 0120 ANI BIT F056 0130 JNZ DAV DATA ON KBD F057 0140 CALL INSHIFT INPUT ON TTY PORT F058 | 0150 CMA F059 0160 ANI 1 F05C | 0170 JZ NODATA F05E 0180 MVI D,162 22 MS SAMPLE F060 | 0190 CALL SAMPLE F061 0200 MVI A.81 IF L LT 22 THEN DATA F064 0210 STIR I. | RAR CMA | NO DAVI SUH NO DAVI STITY FOGE DAVI STIT H PORTSEI. | MOV M,E SELECT INPUT DEVICE F071 POP B F073 | POP D F075 RET F076 | X SAMPLE ROUTINE FOTA X -SAMPLES AND ECHOS TO THE FOTO | X BAUDOT MACHINE THE INCOMING X SERIAL CODE. L IS COUNTER F0081 | 0369 X 0400 SAMPLE MVI L,0 COUNTER F083 | 0420 LOOP CALL INSHIFT 0430 ANI 1 F085 | ADD L MOV L,A | 0465 MOV A,B F08F 0470 CALL OUTSHIFT F090 | 0474 CALL INSHIFT 0476 CALL OUTSHIFT F095 | 0480 DCk D 0510 JNZ LOOP F09B | MOV B,D F09E RET F0A1 |
| X BAUDOT TO ASCII INTERFACE F049 X DESIGNED AND DEVELOPED BY F04A X NADS ENGINEERING F04B X SOFTWARE BY JOHN R HAGLUND F04C X HARDWARE BY WILLIAM B REED F04E | X AUGUST 1, 1977 F051 X Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y | X STATUS INPUT ROUTINE X - CHECKS FOR DATA AVAILABILITY X ON EITHER AN ASCII KEYBOARD X OR A BAUDOT TELEPRINTER | STATUS PUSH D PUSH H PUSH B MVI E.1 | IN KBDSTATUS ASCII KBD STATUS CMA ONLY IF BIT LOW | ANI BIT F056 JNZ DAV DATA ON KBD F057 CALL INSHIFT INPUT ON TTY PORT F058 | 0150 CMA F059 0160 ANI 1 F05C | F0 0170 JZ NODATA F05E 0180 MVI D,162 22 MS SAMPLE F060 | F061 F061 F061 F061 F064 F064 | 0212 RAR F068 | NO DAVI SUH NO DAVI STITY FOGE DAVI STIT H PORTSEI. | 0290 MOV M,E SELECT INPUT DEVICE F071 0310 POP B F073 0320 POP H F074 | POP D F075 RET F076 | X SAMPLE ROUTINE FOTA X -SAMPLES AND ECHOS TO THE FOTO | X BAUDOT MACHINE THE INCOMING X SERIAL CODE. L IS COUNTER F0081 | 0369 X 0400 SAMPLE MVI L,0 F083 | LOOF CALL INSHIFT F084 ANV R A | ADD L MOV L,A | 6465 MOV A,B F0 0470 CALL OUTSHIFT F090 | CALL INSHIFT CALL OUTSHIFT CALL OUTSHIFT F095 | DCR D INZ LOOP F098 | MOV B,D F09E RET F0A1 |



Concept so remarkable, Operation so utterly simple, Cost so incredibly low. The PET has given rise to a brand new era... The Age of the Personal Computer

HIGH SPEED PRINTER

Immediate Delivery

THE PET has become the standard for the personal com-puter industry. Consumer and business publications have lauded its discovery. POPULAR SCIENCE and PLAYBOY have given special tribute to the "mind-boggling" PET.

nave given special knottle to the mind-boggling PET.

IN A LEAGUE WITH IBM, HP
AND WANG MINICOMPUTERS

THE PET is a minicomputer and should not be confused with game products that hook up to household T.V.'s. What sets it apart from other computers is price. While others cost from \$11,000 to \$20,000 and more, THE PET, with similar power, costs only \$795.00.

Features an IEFE-488 Rus. - like HP's mini and full size.

Features an IEEE-488 Bus -- like HP's mini and full size computers. This standard data and control channel permits direct connection to many peripherals. Over 120 pieces of compatible equipment such as counters, timers, spectrum analyzers, digital voltmeters and printer plotters, from HP, Phillips, Fluke, and Textronix, etc., are currently available. ROM Magazine, January 1978, writes, "THE PET comes out of the box, plugs into the wall, and is ready to use." It is equipped with a CRT video display with reverse and blink features, an alpha-numeric keyboard with complete graphics and a built-in standard cassette tape deck.

THE PET has 8K bytes of RAM (user memory). Optional equipment permits expansion to 32K. And, it has 14K bytes of ROM (programmemory). Features an IEEE-488 Bus -- like HP's mini and full size

THE PET COMMUNICATES IN BASIC. THE EASIEST COMPUTER LANGUAGE

If THE PET wants you to press a key, it will flash, "Press such and such", on the display. You speak back to it through its full size 73-key keyboard.

EXTENSIVE CHARACTER ORIENTED GRAPHICS

The unit features a 9-inch, high resolution, 1000 character CRT. Characters are arranged 40 columns by 25 lines on an 8 x 8 matrix for superb graphics.

WHAT IS THE PET REALLY FOR?


WHAT IS THE PET REALLY FOR?

It is the single most important teaching device for any computer related subject. It will entertain the most sophisticated data application, or the simplest inquiry/response assignment. IN THE LAB it handles instrumentation, process monitoring, and more. A number of Fortune 500 companies have already made it an integral part of their lab and general office system.

As a BUSINESS TOOL it will; Maintain ledgers. Keep payroll records. Create P & L's. Control inventory. Store and analyze sales data. Draw bar graphs. Issue invoices. Hook up to on-line computer system. AT-HOME it will; Compute state and federal tax returns. Make heat and insulation analyses. Keep Christmas lists. Keep checkbook and finances up to date. A variety of games, from Blackjack to Galaxy, is currently available.



Amortization Chart





Teaching Trigonometry

HIGH SPEED PET PRINTER

This powerful word processor prints hardcopies, invoices, computer correspondence. Faster than an IBM Selectric, THE PET Printer delivers 60 characters per second at a sustained rate -- with upper and lower case capability. Characters are one-eighth inch tall and are printed in a 7 x B dot matrix. The printer uses a standard 8½" wide paper roll. And, it is only \$695.00.

PERIPHERAL SECOND CASSETTE
This optional component expands storage and increases flexibility. Only \$99.95.

MILES OF SOFTWARE

Many programs are available now, including, "BASIC BASIC" which shows how to write a program. You can develop your own programs to meet personal requirements.

TECHNICAL SPECIFICATIONS

MEMORY

MEMORY
Random Access Memory (user memory); 8K internal,
expandable to 32K bytes
Read Only Memory (operating system resident in the
computer); 14K bytes
8K-BASIC interpreter program, 4K-Operating system, 1K-Diagnostic routine

VIDEO DISPLAY UNIT

VIDEO DISPLAY UNIT
9" enclosed, black & white, high resolution CRT
1000 character display, arranged 40 columns by 25 lines
8 x 8 dot matrix for characters and continuous graphics
Automatic scrolling from bottom of screen
Winking cursor with full motion control
Reverse field on all characters
64 standard ASCII characters; 64 graphic characters

KEYBOARD

KEYBOARD
91/2" wide x 3" deep; 73 keys
All 64 ASCII characters available without shift.
Calculator style numeric key pad
All 64 graphic and reverse field characters accessible
from keyboard (with shift)
Screen Control: Clear and erase
Editions, Character is earlied and deletion.

Editing: Character insertion and deletion

CASSETTE STORAGE

Fast Commodore designed redundant-recording scheme, assuring reliable data recovery

Cassette drive modified by Commodore for much higher reliability of recording and record retention High noise immunity, error detection, and correction Uses standard audio cassette tapes
Tape files, named

OPERATING SYSTEM

OPERATING SYSTEM
Supports multiple languages (BASIC resident)
Machine language accessibility
File management in operating system
Cursor control, reverse field, and graphics under simple
BASIC control
Cassette file management from BASIC
True random number generation or pseudo
random sequence

random sequence
INPUT/OUTPUT
All other I/O supported through IEEE-488 instrument
interface for peripherals
I/O automatically managed by operating system software
Single character I/O with GET command
Easy screen line-edit capability
Flexible I/O structure for BASIC expansion with peripherals

Plexible I/O structure for BASIC expansion with perip BASIC INTERPRETER 8K BASIC; 20% faster than most other 8K BASICS Upward expansion from BASIC language Strings, integers, multiple dimension arrays 10 significant digits; floating point Direct memory access: PEEK and POKE commands DIMENSIONS 16" wide; 181/2" deep; 14" high. Weight: 44 lbs.

GAME PROGRAMS ARE \$9.95 EACH:

- □ Black Jack □ Draw Poker □ Galaxy Games
 □ Space Flight □ Target Bong, Off-The-Wall
 □ Lunar Lander, Wumpus, Rotate, Tic-Tac-Toe
 □ Osero, Reverse □ Spacetrek □ Kingdom
 PROGRAMS AT \$14,95 EACH:

- Mortgage Analysis
 Diet Planner and Biorhythm
 Basic Basic-by Lodewyck and James

- □ Basic Basic-by Lodewyck and James
 PROGRAMS AT \$24.95 EACH:
 □ Basic Investment Analysis-loans, annuities, return
 on regular and irregular sequences of payments,
 calendar calculations
 □ Stock Portfolio Recordkeeping and Analysiskeeps track of buys, sells, and dividends. Calculates
 current value, rates of return
 □ Checkbook Recordkeeping and Analysis-keeps
 track of checks and deposits. Analyzes expenses
 by date and type
 PROGRAMS AT \$29.95 FACH:

- by date and type

 PROGRAMS AT \$29.95 EACH:

 □ Basic Math Package-matrix addition, multiplication, determinants and inverses to 16 x 16, solution of simultaneous linear equations, vector and plane geometry calculations, integration by trapezoidal, Simpson's rule or Gaussian quadrature, differentiation

 Basic Statistics Package-mean, median, variance, standard deviation, skewness, kurtosis, frequency distribution, linear regression, T-tests, correlation analyses

FREE ORIENTATION PACKAGE

Your PET comes complete with two programs and an easy-to-follow instruction manual. By working through the routines you will quickly discover how easy it is to gain command of your personal computer.

SERVICE WORLDWIDE

Because your PET is self-contained and compact, profes-sional factory service is never far away. If major service is re-quired, the unit can simply be returned by UPS to an authorized Commodore PET clinic.

authorized Commodore PET clinic.

To order your PET send check or money order for \$795.00 plus \$20.00 for shipping and insurance. To order the PET Printer, add \$695.00 plus \$12.00 for shipping and insurance charges are required when ordering a second cassette or programs with your PET. Credit card orders are invited to call our toll free number below. Orders will be accepted on our TELEX, No. 25-5268.

Use THE PET for 30 days with no obligation. If, for any reason, you are not satisfied, return it for a prompt and courteous refund.

ORDER DIRECT

CREDIT CARD ORDERS CALL TOLL FREE 800-323-2272

ILLINOIS RESIDENTS CALL: 312-595-0461

TELEX ORDERS: 25-5268

Order your PET, Printer Accessory, Second Cassette and Programs from Contemporary Marketing at:

DEPT. KI-9 C65 790 MAPLE LANE BENSENVILLE, IIIINOIS 60106



| START OF TABLE COUNTER PUT ASCII IN A | NOT IN TABLE POINTER ASCII CR ASCII LF | FIG IF D=1 TO 32 RESET MODE SWITCH BAUDOT LETTER KEY | BAUDOT FIG KEY POINTER LOOK UP TABLE A = ADRESS + TTY CODE | ASCII CR DELAY 1/4 SEC OPTIONAL FOR VIDEO | ROTATE LEFT BIT 0 EQ START BIT BITS 6,7 EQ STOP BITS D EQ COUNTER |
|--|---|---|--|--|--|
| LXI H,ALOOK MVI D,64 MVV A,E LUP CMP M JZ MATCH INX H | JNZ LUP JMP OUTRET MATCH PUSH H JZ SERIAL CPI ODH JZ SERIAL JZ SERIAL JZ SERIAL JZ SERIAL | MVI A,32 CMP D LXI H,MODFL MVI A,0 JNC FIG CMP M MVI M,0 JZ SERIAL MVI A,1FH CALL TTYOUT JMP SERIAL FIG CMP M | JNZ SERIAL MVIA.1BH CALL TTYOUT SERIAL POP H PUSH PSW LXI B.ALOOK MOV A.L SUB C SBI 32 | JP OKB ADI 32 OKB CALL TTYOUT POP PSW CPI ODH JNZ OUTRET LXI B,18500 CALL LOOP2 OUTRET POP PSW CALL VDMOUT POP B | POP H POP D RET TTYOUT RLC ANI OFEH ORI OCOH MUI D.8 RLC TLOOP RRC MOV E.A ANI 1 CALL OUTSHIFT CALL DELAY MOV A.E DCR D JNZ TLOOP |
| 2320 2330 2340 2340 2350 2370 2370 | 2390 2410 2420 2440 2440 2460 2460 2470 | 25 20 0 25 20 0 0 0 0 0 0 0 0 0 0 0 0 0 | 2650 2660 2670 2680 2685 2690 2710 2720 2730 | 2740 2750 2760 2762 2764 2766 2768 2770 2770 2770 2775 2775 | 2790 2810 2830 2900 2910 2920 2930 2950 2950 2960 2960 2960 2960 2960 2960 2960 296 |
| I I | F1 F1 F1 | | F1 F1 | F1 F1 F1 FF | F0 F1 |
| 98 40 40 10 | 10 6D 6D 6D 6D 6D 6D 6D 6D 6D 6D 6D 6D 6D | | | 5E 20 20 20 75 6D 6D 6D 75 75 75 75 75 75 75 75 75 75 75 75 75 | FE C0 08 08 01 01 01 01 01 01 01 01 01 01 01 01 01 |
| F10A 21 F10D 16 F10F 7B F110 BE F111 CA F111 23 | | | | | F172 E1 F173 D1 F174 C7 F175 O7 F176 E6 F178 F6 F17A 16 F17A 16 F17D OF F17D OF F17E 5F F17E 5F F17E 5F F17E 5F F17E 7B F188 CD F188 T8 |
| 60 JZ LOOKUP 60 LXI H,FIGLOOK 70 LOOKUP DAD B 80 MVI A,1 11 CALL OUTSHIFT 83 LXI B,18500 MOY A M | INF | ***** | X X X OU | TH | 70 PUSH H 80 PUSH B 80 PUSH PSW 80 PUSH PSW 80 PUSH PSW 80 JC UPCASE 80 JC UPCASE 80 JC UPCASE 80 UPCASE 90 UPCASE 10 LNZ UPC2 10 LNZ UPC2 10 LXI H,SUPFL 10 LXI H,SUPFL 10 LXI H,SUPFL 10 LXI A 10 LXI A |
| FO 1450 F1 1460 1470 1480 1481 48 1483 | 1486 1486 F1 1480 F1 1500 1520 1530 | 1500 1500 1500 1805 1900 1951 1954 1954 1960 | | F0 2060 F0 2070 F0 2090 F0 2110 F0 2120 F0 2150 F0 2155 | 2170 2180 2180 2190 2210 2220 70 2240 2250 F1 2255 F1 2256 F1 2256 F1 2250 F1 2270 |
| AB F B8 F 01 4E F 44 44 | 0D F 90 F DA F 01 | | | E0 F 4C F EC F EC F 3D F EC F 51 F 51 | 77F 60 60 52 58 00 78 78 78 78 78 78 78 78 78 78 78 78 78 |
| CA 1 221 H 099 33E C CD 4 | | | | | CC5 CC5 CC5 CC5 CC5 CC2 CC2 CC2 CC2 CC2 |

| RET DELAY LXI B,1625 LOOP2 DCX B MOV A,B CPI 0FFH JNZ LOOP2 | X LOOK UP TABLE FOR LETTERS X ALOOK DW 'ED'-40H DW 410AH DW 410AH DW 'YI' DW 'YI' DW 'FN' DW 'FN' DW 'FN' DW 'YE' DW 'YY' | | X X THE FOLLOWING SOFTWARE FLAGS X X MUST BE LOCATED IN RAM X PORTSEL DS 1 MODFL DB 0 SUPFL DB 0 X SYSTEM EQUATES X X SYSTEM EQUATES X KBDSTATUS EQU 0 BIT EQU 1 PONT EQU 6EH TARBELL SPAR KBD EQU 1 PSW EQU 6 X X X X X X X X X X X X X X X X X X X |
|---|---|---|--|
| 20 20 20 30 50 50 60 | 3170 3174 4000 4000 4020 4030 4040 4060 4070 4080 4090 4090 4110 4130 4130 4150 | 4160 4164 4164 4166 4110 4110 4210 4220 4220 4220 4220 4230 4230 4330 433 | 4350 4354 4356 4506 4500 4500 4604 4604 5000 5000 50 |
| | | | |

| 59 FF 90 | 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 | 88 0 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 |
|--|--|---|
| C9 01 0B 78 FE C2 C9 | 03 00A 20 20 00D 00D 00D 44 44 55 44 47 47 56 | 338 338 338 339 339 300 300 300 300 300 300 300 300 |
| | | F118 F118 F118 F118 F118 F118 F118 F118 |
| | | |



Phoenix AZ

Bits & Bytes Computer Shop has microcomputer systems for the small businessman and hobbyist and an experienced technical staff. We carry: Vector Graphic, Imsai, Integrand, North Star and others. Bits & Bytes Computer Shop. 6819 North 21st Ave., Phoenix AZ 85015, 242-2507.

Los Angeles CA

Featuring: PolyMorphic, North Star, Imsai, Cromemco, Extensys, Speechlab products and Poly-88 Users Group software exchange. All products 10-20% off list. We won't be undersold! A-A-A-A Discount Computer How's, 1477 Barrington, Suite 17, Los Angeles CA 90025, 477-8478.

Palo Alto CA

Systems available for immediate delivery: word processing; multiprogramming, multiuser work in process; business; medical/dental billing and accounts receivable. Software and hardware guaranteed. Byte of Palo Alto, 2233 El Camino Real, Palo Alto CA 94306, 327-8080.

Chicago IL

Staffed by computer professionals. Largest selection of books and magazines in the Chicago area. Specialists in CP/M, Apple Computer and Alpha microsystems. Data Domain of Schaumburg, Plaza de las Flores, 1612 E. Algonquin Rd., Schaumburg IL 60195, 27.9.70.

Grand Rapids MI

Full-line microcomputer store. Ohio Scientific—Equinox—PolyMorphic Systems—Digital Systems—Godbout—Dynabyte—Thinker Toys—Meca—North Star. Micro Computer World, 313 Michigan St. N.E., Grand Rapids MI 49503, 451-8972.

Omaha NE

Business systems, programming, and maintenance. Hobbyists welcomed. Satisfied customers our goal. Open seven days/nights. Byte Shop of Omaha, 8523 Park Dr., Omaha NE 68127, 339-7350.

Nashua NH

Small business computer systems: Imsai VDP-80, PolyMorphic Systems 8813, Seals PUP-1, Algorithmics Word Processing System. General ledger, A/R, A/P, invoicing, payroll. Specialized microprocessor applications. Microcomputers, Inc., 36 Otterson St., Nashua NH 03060, 889-1646.

Syracuse NY

We stock: Apple, Commodore PET, KIM, North Star, Cromemco, Imsai, TDL, Vector Graphic, Heuristics, Lear Siegler, Netronics ELF, books, magazines, parts and supplies. Computer Shop of Syracuse, Inc., 3470 Erie Blvd. East, DeWitt NY 13214, 446-1284.

Newton NC

Turnkey microcomputer systems for professional, business and industrial applications, featuring Imsai (and the fabulous VDP-80). Custom software, expert service and sound advice from DP specialists. Microcomputer Services, Rte. 1, Box 337, Newton NC 28658, 462-1401.

York PA

Personal and small-business systems. Components and peripherals. Books, magazines, information. Hobbyists Welcome. ½ Block from Business 83 at Iron Bridge. G.Y.C. Co., 51 Hamilton Ave., York PA 17404, 854-0481.

Houston TX

Bare boards, kits, small systems, multiuser systems, custom hardware design, software for business or hobby, nationwide consulting available. Please call. Houston Computer Mart, 8029 Gulf Freeway, Houston TX 77017, 649-4188.

Houston TX

Supplier of microcomputer components and systems for business and pleasure. Business systems delivered ready to run, hardware and software. Also design computerized machine logic controllers. Musgrove Engineering, 9547 Kindletree Dr., Houston TX 77040, 466-3486.

Dealers: Listings are \$15 per month in prepaid *quarterly* payments, or one *yearly* payment of \$150 also prepaid. Call Heidi at 603-924-3873 or write *Kilobaud*, Ad Dept., Peterborough NH 03458.

Richland WA

田田

Apple, North Star, Ohio Scientific. All products listed in Byte Shopper, classes, literature, electronic parts, repair services. Custom design/consulting in both hardware and software. Ye Olde Computer Shoppe, inc., 1301 George Washington Way, Richland WA 99352, 946-3330.

Spokane WA

Clearance sale on Imsai. Discounts to 60%; to 33% on mainframes. One V DP-80 with IM-DOS, CBASIC \$1400 below retail. Distributor for ADDS terminals. The Computer Shop, S. 107 Wall St., Spokane WA 99204, 456-0311.

Madison WI

Mainframes by Commodore, Processor Tech., Cromemco, Imsai, TDL. Printers by Teletype, NEC, Texas Instruments, Diablo. Terminals by Microterm, Intertube. Micropolis disk drives. Service and software. The Madison Computer Store, 1863 Monroe St., Madison WI 53711, 255-5552.

Milwaukee WI

We carry the following manufacturers' products: Byte, Imsai, Cromemco, Hazeltine, Centronics, Sanyo, Dynabyte, North Star, Micropolis. We are also a PET dealer. Excellent service. Byte Shop of Milwaukee, 6019 West Layton Ave., Greenfield WI 53220, 281-7004.

Is your city listed?

FLEXIBLE DISK SYSTEM FOR KIM-1 HDE Model DM 816-DI-1



- 0 Line numbered text entry and editing
- 0 Powerful command structure
- 0 Capability for user defined commands
- O Completely compatible with KIM input/output routines
- 0 Multiple resident files
- 0 Indexed storage and scratch pad

INCLUDES:

- O Sykes 7000 single drive disk and controller (expandable)
- O Power supply rated for 4 drives
- 0 KIM-4 motherboard interface card
- 0 All interconnecting cables
- 0 File oriented disk system (FODS)
- 0 User manual
- 0 90 day parts and labor warranty

THE FILE ORIENTED DISK SYSTEM:

- O Single or dual drive versions
- 0 Requires less than 4K bytes (F100 to FFF7)
- 0 Compatible with Microsoft KIM-1 BASIC and Aresco ASSEMBLER
- 0 Text editor functions/commands include:
 - APPEND, END, EDIT(line), FILE(designation),

 - LIST, SIZE, LOCATE, MOVE,PRINT, RESEQUENCE, SUBSTITUTE, NUMBERS
- 0 Disk functions/commands include:
 - DELETE, DIRECTORY, LOAD,
 - SCRATCH PAD(A and B), SAVE
- 0 Support functions/commands include:
 - ADDRESS(line number), ASSEMBLE, CONTINUE ASSEMBLY,

 - JOB, RUN, I/O SELECTION,JUMP(to monitor), PROMPT(change), etc.
- 0 Limited software warranty



\$1,995.00 F.O.B. Medina, Ohio PRICE: ORDER THE HDE DISK SYSTEM FROM

P.O. BOX 523 MEDINA, OHIO 44256 (216) 725-4560

Error-Correcting Techniques

Reliability has been a goal in data transmission ever since the earliest telegraph lines were stretched across the country. The following discusses some applications a little more up-to-date than that.

ext to speed, the most common complaint about the cassette interfaces available to the hobbyist today is their error rate. Nothing is more frustrating than losing a favorite program or an important piece of data simply because one bit out of several hundred thousand on the tape was lost to a wrinkle or chip in the oxide coating of the tape.

The most obvious solution is to keep several backup copies of important tapes on hand. A simpler, and often more satisfactory, solution is to make three or four copies of the program, one after another, on the same tape. This safeguard is all but standard in the world of

commercial data processing and is the surest protection against hard errors due to physical damage to the tape, such as breakage, chipping or spilled coffee.

But there is another kind of error which, though less serious, is more annoying because it happens more often. This is the so-called soft error—the tape reads perfectly eight times in a row, but then fails to read when you try to show off your system to a friend. This prompts remarks such as, "Do you always have to try it three times before it works?"

This type of error is caused by some fleeting and unknown gremlin in the system that, now and then, likes to waylay a bit at random. You can be reasonably sure that it is, indeed, a soft error if a second or third try produces a clean, error-free load.

Most cassette save/load software recognizes the possibility of error, and provides what is called the checksum to verify that the data has, in fact, been loaded correctly. Basically, the checksum is the binary sum of every byte, ignoring all carry bits, on the tape. If the checksum computed during a load operation agrees with the checksum read off the tape, the odds are 256 to 1 that the load is correct.

Error Correction Is the Answer

If we want completely trouble-free operation, however, it is not enough that the computer tell us that some error has occurred; the system should go beyond that and actually correct the error. If this were possible, there would be no need for the program to even tell us that an error had happened. It could simply straighten out the problem, fix up the bad data and keep right on going without ever missing a beat! From the user's point of view, a tape-cassette system that could repair its own errors "on the fly" would look the same as a cassette that never made any errors in the first place.

The tape transports used on large-scale computers are many times more reliable than the cassette deck used by the average hobbyist, but even these have elaborate errordetection and correction circuitry built into them. You may consider it a personal tragedy when you lose your favorite version of Star Trek, but consider the consequences if that tape contained the entire company's payroll or a few thousand checking-account balances. The large-scale tape transports simply must work. There is very little margin for error.

Does this mean that in order to achieve a high level of reliability we must reengineer our cassette interface boards? Not at all. What every large-scale commercial system accomplishes with exotic hardware, we can do quite effectively in software. That's right, your existing cassette interface can be made 10, or 100, or even 1000 times more reliable with appropriate error-correcting software.

"But hold on!" you say. "You can't get something for nothing. What exactly must we give up to get that kind of reliability?" The answer is speed. The system of error correction we will explore here produces




Fig. 1. A block of eight bytes showing vertical and horizontal parity.




Fig. 2. Two-way parity allows us to zero in on the bit in error.

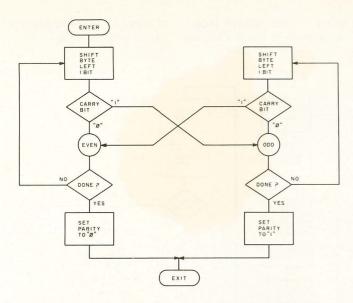


Fig. 4. A software flip-flop computes vertical parity bits.

about 16 times the reliability at a cost of about 20 percent reduction in speed. Other systems that can boost reliability by many hundreds of times may reduce speed by as much as two-thirds.

Parity-What Is It?

Before getting down to specifics, let's consider the concept of parity. In its simplest sense, parity is a single-bit checksum computed for a single byte. In other words, it takes the binary sum of all the ones and zeros in the byte, and discards all but the rightmost bit.

In some systems, parity is the complement of this sum; such buzzwords as "odd parity" or "even parity" are used to describe these differences. But the parity bit, like the checksum, only tells us that an error has occurred; it does not provide any clue as to which bit was in error.




Fig. 3. The vertical parity can be written as a separate byte at the end of the data block.

Consider, for example, the byte 0110 0011. The single-bit sum of all the bits is 0. Now suppose that an error occurred while this byte was being read off the tape, and it was received as 0111 0011. The computed parity would be 1, but the parity we were told to expect was 0. We know that one of the bits we read in was in error, but which one? It might even be the parity bit itself.

Clearly, parity, by itself, will never give the computer all the information it needs to *correct* a bit in error. In order to correct errors, we might use a system similar to that used in most large-scale systems. In these systems we usually find two kinds of parity—vertical and horizontal parity, or row and column parity.

Imagine that we have a block of eight bytes written on tape, as in Fig. 1. If we think of the bytes as occupying vertical columns, set side by side, we can easily see how these two different kinds of parity would be computed.

The so-called vertical parity bit, the single-bit checksum for each bit in the byte, is the parity we have been discussing. The horizontal parity, on the other hand, is the same computation made horizontally—on a single-bit position in each of the eight bytes in the block. Although the data is not actually arranged in this manner on the tape (except in large-scale nine-

track recording systems), the data can be effectively treated as if it were.

Now suppose that after we read in the entire block, the computed parity for byte 6 disagrees with the input parity. Some error has occurred in byte number 6, but in which bit? Now we must examine the horizontal bits. If any bit of byte 6 were changed, a parity error would show up in the horizontal row corresponding to the position of that bit. The presence of two simultaneous parity errors, row and column, allows us to zero in on the exact bit that was received incorrectly, as illustrated in Fig. 2.

If we know that a bit read in as 1 is in error, then, since the only possible values are 1 and 0, the only possible error is that the 1 should be a 0. By the same reasoning, if the bit in error had been a 0, then it should be changed to a 1 to correct the error. In other words, once the bit in error has been located, the correction is simply to complement that bit.

What about Hobby Systems?

This all sounds great in theory, but the cassette interface is usually set up to transmit and receive data in eight-bit bytes. How do we coax such a device to write the ninth bit we need for parity? The simplest solution is to save all the parity bits for a given block and put them out as a single extra parity byte.

Fig. 3 illustrates how this arrangement works. A block of eight data bytes now becomes a block of ten bytes—eight data bytes, one horizontal parity byte, and one vertical parity byte. Now we see why increased reliability means lowered speed; the extra bytes require extra time to read and write.

The actual coding required to implement this method of error correction depends, of course, on which processor and which cassette interface is being used. Rather than try to provide examples of every possible combination, we will consider a detailed description of the logic required. I hope this will be sufficient information for

the average assembly-language programmer who wishes to implement the software on his own system.

The horizontal parity is most easily formed by using the exclusive OR instruction. Each byte to be written is XORd into the byte that will become the horizontal parity byte. This has the effect of placing a zero wherever an even number of bits were ones, and a one wherever an odd number of bits were ones. The vertical parity byte requires a little more logic to

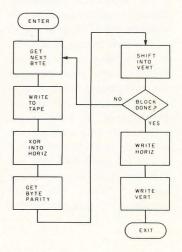


Fig. 5. The procedure for writing a self-correcting data block.

generate.

The most significant bit in the parity byte is the parity for the most significant byte of the block, and so on. In order to accomplish this, each parity bit must be generated, and then shifted into the prior intermediate parity byte until all eight bytes have been written and all eight parity bits have been shifted into the parity byte.

The method used to generate the individual parity bits will vary from one processor to another, and, in fact, some machines compute the parity bit automatically. If yours is one that does not, consider the simple program illustrated in Fig. 4 to carry out the necessary computation. The subroutine is essentially a two-state automaton, or software flip-flop, that changes state (from odd to even or vice versa) whenever a one bit is encountered. The

subroutine is entered in the even state and exits from the appropriate state when all eight bits have been processed. The parity bit is determined by the final state of the subroutine.

The procedure for writing a block is diagramed in Fig. 5. The flowchart of Fig. 6 is used to read back the same block with error correction.

It should be noted that certain types of errors cannot be corrected by this method. They include multiple errors in a single block, and single errors in the parity bytes themselves. Greater reliability could be provided by the addition of a third control byte to contain the parity for the two prior parity bytes. In case an error occurs in one of the parity bytes, the third control byte would indicate the presence of an error; if the other parity byte were correct, we would know that the error was in the parity byte only, and that the data is correct and needs no fixing. This would probably eliminate most errors

that would otherwise be flagged as multibit errors.

Wrap-up

Given a piece of equipment with fixed reliability, more dependable operation can be obtained only through increased redundancy. However, as redundancy increases, speed decreases.

One very simple technique with far greater reliability than the scheme discussed above is to write each byte three times in a row and then apply a majority-rules vote among the three incoming bytes to decide which bits should be ones. It is extremely unlikely that three bytes in a row would suffer from the same error; the majority vote of the other two bytes would ignore the oddball if an error does come up.

This simple trick increases reliability by several hundred times, but slows the effective transfer rate to one-third the normal rate for the interface.

In the final analysis, the choice of technique will rest

solely on the relative importance given to the two factors of speed versus reliability. The choice is up to you.■


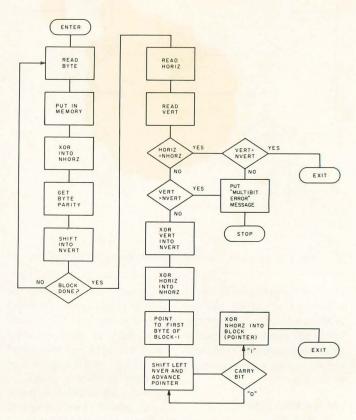


Fig. 6. Retrieving the data block with error correction.


KIM Organ

Short . . . but sweet notes will emanate from your KIM.

Don Ketchum 313 Van Ness Ave. Upland CA 91786




The following program and either of the two simple interface circuits will turn your KIM-1 into a 15-note electronic organ, playable directly from the KIM keyboard.



| KEY | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | В | C | D | E | F | |
|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| NOTE | _ | G | ۸ | D | 0 | D | _ | _ | 0 | ۸ | D | 0 | _ | _ | _ | |

| ADDR | ESS | | PRO | GRA | M | | | |
|------|-----|----|-----|-----|----|----|----|----|
| 100 | D8 | A2 | 04 | 20 | 1D | 01 | A2 | 00 |
| 108 | 20 | 1D | 01 | 20 | 6A | 1F | C9 | 15 |
| 110 | F0 | F9 | A8 | B9 | 35 | 01 | 8D | 2B |
| 118 | 01 | DO | E6 | 00 | 00 | 8E | 03 | 17 |
| 120 | A2 | 41 | 8E | 1B | 01 | CE | 1B | 01 |
| 128 | DO | FB | A2 | 00 | 8E | 1C | 01 | CE |
| 130 | 1C | 01 | DO | FB | 60 | FA | FA | D6 |
| 138 | B6 | 96 | 8.4 | 74 | 5E | 55 | 42 | 33 |
| 140 | 24 | 1C | 10 | 07 | 01 | 01 | 01 | 01 |
| 148 | 01 | 01 | | | | | | |

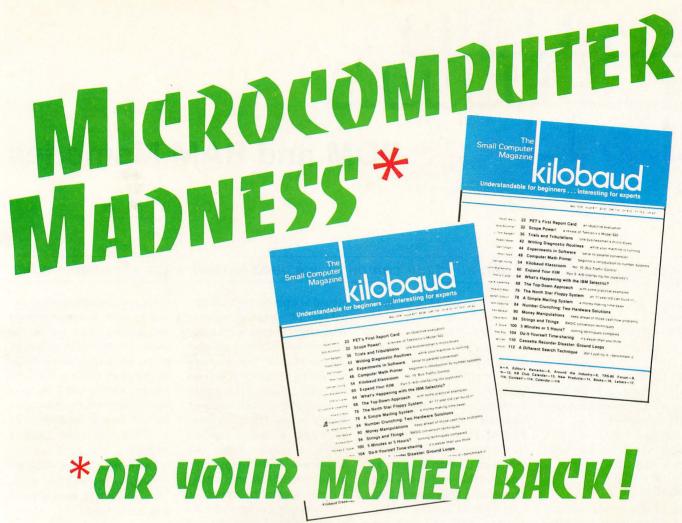

(use coupon below and your enjoyment is guaranteed)

224 ARTICLES

Kilobaud has more articles than any other microcomputer magazine. During 1977, for instance, there were 224 articles in Kilobaud—880 pages of articles—a veritable encyclopedia of microcomputing. There will be even more articles in 1978.

FOR THE BEGINNER

Though Kilobaud covers both the technical and programming sides of microcomputers, each article is written to be understandable for the beginner. No other magazine makes it as easy to learn more about microcomputers.

THE BEST PROGRAMS

Only Kilobaud offers programmers both the publication of their programs in the magazine plus a large royalty for the program if it's issued on cassettes. Is it any wonder all of the really good programs are being published in Kilobaud? You'll find the best in software . . . games, diagnostics, teaching, music, business, etc. We're very heavy on programs.

HOBBY OR BUSINESS?

Both businessmen and hobbyists want the same thing: to understand microcomputers . . . and this is the purpose of Kilobaud. KB also has articles aimed at the businessman to help him know what is available and what it will do.



Understandable for beginners . . . Interesting for experts.

peterborough nh O3458

MONTHLY COLUMNS

Keep up with the latest developments and readers' programs through the letters column. The editorials will keep you up to date on money-making ideas, the progress of the industry and more. The New Products column is particularly useful, including the results of tests of the latest equipment in the Kilobaud microcomputer laboratory—the most complete in the industry.

SUBSCRIBE TO KILOBAUD

Since Kilobaud is the fastest selling microcomputer magazine on the newsstand, it's sometimes hard to find a copy. Why not subscribe today and get the convenience of mail delivery, plus a big cash savings . . . \$6 over newsstand for a 1-year subscription and a \$36 savings when you subscribe for 3 years. If you are in a hurry, call Toll Free 1-800-258-5473, and enter your subscription right away . . . we'll bill you later.

New from Kilobaud: INSTANT SOFTWARE —See page 115

| | KI | LOBAUD | ~ |
|------------------------|--|----------------------------------|---|
| | 100% GUARANTEE | OF EXTREME SATISFACT | ION! |
| egrudgingly (We work 1 | 16 hours a day, seven days a we eat articles and fantastic progra | ek, to put out the best microcol | cription, we'll refund your money mputer magazine the world has eve py about being rejected). Your chec |
| 1 year \$18 🗆 3 | 3 years \$36 🗆 Bill me | ☐ Payment enclosed | YOUR GUARANTEE |
| Ms./Mr. | (please print) | | cancel your subscription within 60 days |
| Address | | | for any reason and you get your money back |
| City | State | Zip | |
| For Instant S | ubscriptions call 1-8 | 00-258-5473 or | |

GUSAUD BOM

ROM and RAM Memories

Before we can go ahead and build our computer, we need to learn more about memories.

Peter A. Stark PO Box 209 Mt. Kisco NY 10549

n the last session, we finished up the data and address buses and covered address decoding for memory.

In this session, we will look at ROM and RAM memories and how they work.

Introduction

The most common memory is called RAM, which stands for random access memory. Readwrite memory, or RWM, might be a better choice, but it doesn't pronounce as well. RAM is memory that can be written into or read out of by the computer at any time, and in any order. The last part is what is meant by the word random. Every computer will need some RAM, and usually the more the better.

ROM, or read only memory, can also be written and read, but the writing is usually done only once or at best a small number of times. ROM comes in several types.

1. Mask-programmed ROM is written into by the manufacturer. Actually, the pattern of 0 and 1 data is permanently stored into it by the IC manufacturer during the time that the chip itself is being made. Mask-programmed ROMs are cheap in large quantities, but the setup charge of \$1000 and up makes it impractical to have just one or two made...defi-

nitely only for the big spenders.

2. PROM is programmable ROM. The PROM is manufactured containing either all 0s or all 1s, depending on the IC, and it can be changed at a later time by applying higher voltage or current pulses to the pins in a specified sequence. Most PROMs use fusible links, very thin interconnecting links on the IC chip which burn up and open-like a fuse-when zapped by a high-current pulse. If the PROM initially contains all 1s, then "burning" the PROM opens the links and changes them to 0s. Once programmed, additional 1s can still be changed to 0s, but the 0s cannot be changed back

3. EPROM is also a programmable ROM, but it is erasable. Rather than burning up fusible links, the EPROM stores its data as electron charges in isolated regions on the semiconductor. Once a charge is placed in a particular bit, it cannot leak off since the region in which it is located is insulated from the rest of the IC. IC manufacturers claim that the memory will be retained for at least ten years, though occasionally an EPROM does seem to have a short memory. The EPROM can be erased by placing it in very strong ultraviolet light. This shortwave high-energy light makes the EPROM chip act like a photodetector by increasing the leakage currents in the silicon material. Given enough time, this can discharge the stored charges and erase the EPROM.

4. EAROM is an electrically alterable ROM. It is actually quite similar to an EPROM, except that the erasing is done with an applied voltage rather than applied light. Thus, the erasing can be done while the IC is still plugged into the computer, and the computer can write back into it. Typical read

times are around one microsecond or less, whereas erasing and writing times are on the order of one millisecond or more; so writing takes much longer than reading. For this reason, writing would be done very seldom; another name you sometimes hear for the EAROM is RMM, or read mostly memory.

The ROM makes a good beginning to the study of memories, since it is easy to build and understand.

Experiment #56 A Simple Diode ROM

Problem: What is the simplest kind of a ROM?

Solution: Diode ROMs have been used in a variety of circuits for many years, even before the coming of integrated circuits. We will build one on the console breadboard.

Procedure: Fig. 1 shows the ROM. In this case, we have 16 diodes arranged in a neat matrix of four across and four down. This kind of a circuit could be built fairly neatly on a two-sided printed circuit board, with the vertical input lines running on one side of the board and the horizontal output lines on the other. On the breadboarding socket of your console, however, it is much harder to wire up in an orderly manner. Any way you try to do it, you will wind up with a rat's nest of wires.

For this experiment, use the junkiest diodes you can find. Use small signal diodes—

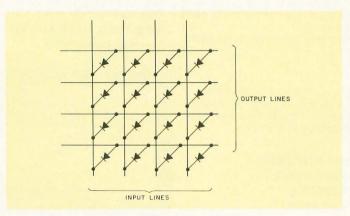


Fig. 1. Simple diode ROM.

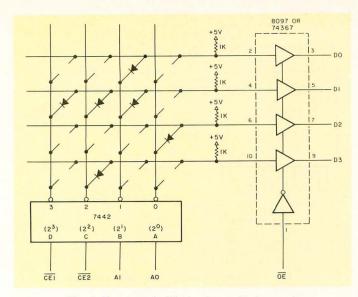


Fig. 2. Homemade ROM using a diode matrix.

either germanium or silicon will do—the smaller the better. Do not use big power rectifier diodes.

Next, you will need a way of monitoring the output of the ROM. To each output line hook up an LED and a 150 Ohm resistor in series to +5 volts; make sure that the anode of the diode goes up toward the +5 volt line. At this point, the LEDs will not light yet.

Now take a short wire jumper and ground any one of the four input lines. Grounding any one of these lines should turn on all four output LEDs. Ground each input line in turn to make sure that each one turns on all the LEDs. If any one of the LEDs does not light when one of the input lines is grounded, then probably the diode at the intersection of the grounded input line and the line to the dark LED is defective or wired wrong or backward.

Theory: When none of the input lines are grounded, the output lines are floating, and all four output LEDs are off. This is equivalent to a 1 output. If we ground one of the input lines, we complete the circuit to ground, and each of the output lines is pulled to ground through a diode.

This would be called a 4 x 4 ROM, meaning that it has four memory locations, each having four bits. Each of the vertical input lines corresponds to one memory location, while the four horizontal output lines carry

one bit each. At this point, each of the four locations is programmed with all 0s, since all outputs go to a 0 or low voltage when one of the locations is selected by grounding an input line; but if the output were connected to inverters then it would look as though all locations were programmed to high voltages or 1s.

Experiment #57 Programming the Diode ROM

Problem: How do we program such a ROM?

Solution: By burning out diodes or by unplugging them from the socket. Actually, it depends on your mood...you may decide to simply unplug them. On the other hand, if you want a thrill, and hang the cost, then proceed with the rest of this experiment.

Procedure: Assuming that you used really cheap diodes, and that your +5 volt power supply has enough current capacity, you should have no problem burning out a diode at a time. Simply ground an input line with a short jumper and then connect an output line to +5 volts with another jumper. ZAP... with luck you'll see a slight flash inside the diode...

and there it is. You have just changed a 0 into a 1.

But watch out. It is possible for a glass diode to shatter, so keep it far enough away from your face. Also, do not try this if you have used rectifier diodes in the diode ROM. You might find that you are blowing out your power supply instead of just a ROM diode.

After you have burned—or unplugged—a few diodes, remove the jumper to +5 volts and again ground each of the four input lines, one at a time. This time only those LEDs connected to good diodes will light. In other words, good diodes still provide 0 outputs, but burned-out diodes give 1 outputs.

A very similar procedure is used in PROMs, except that each diode has in series with it a thin fusible link, often made of nichrome, which is blown rather than the diode itself. The diode is there strictly to prevent sneak current paths, which might steer the programming current through a different path and blow out more than one bit.

Experiment #58 Completing the ROM

Problem: That's all very nice, but how do you use a ROM like this on the address and data buses of a computer?

Solution: You can't connect it directly, because so far you have only wired the matrix. What we need next is some decoding circuitry for the input lines and Tri-state buffers for the outputs.

Procedure: Fig. 2 shows the complete circuit of a practical ROM. First of all, we can use a 7442 decoder as an address decoder. Since we have only four locations, we need only two address lines. We can use the A and B inputs to the decoder for address bits A0 and A1; this leaves two more inputs to the decoder, both of which must be

low to permit the IC to ground one of the four outputs we are using. Hence these two inputs can be treated as active-low chip enables and labeled $\overline{\text{CE1}}$ and $\overline{\text{CE2}}$. The overbars imply that both inputs must be low for the circuit to be operational.

We put pull-up resistors on each of the output lines and connect them to a three-state output buffer such as an 8097, 8T97 or 74367. In order to enable the buffer, we have an output enable line labeled $\overline{\text{OE}}$; here again, the overbar implies that this line must go to ground for the outputs to be enabled.

To observe the outputs of the buffer, connect your diodes and resistors as before. Now ground the two chip enable inputs and the output enable; then put various combinations of 0 and 1 on the two address inputs A0 and A1, and watch the outputs change as you address different locations. Each burned-out diode should provide a 1 output, while the remaining diodes should provide a 0 output.

Theory: The circuit of Fig. 2 is fairly straightforward, with the 7442 grounding an input line selected by the two-bit address, and the 8097 outputting the selected four bits.

The existence of so many chip enables and output enables is a little confusing, though. Actually, when you think about it, the two chip enables to the 7442 are not needed; we might as well ground them permanently. If the output isn't enabled, it doesn't matter what the rest of the ROM does. We can rely on the \overline{OE} to do the chip selecting.

In this way, the ROM memory will decode all addresses and provide data to the output buffers for all memory operations, even those not intended for this particular memory. But the output buffers will provide an output only when this one ROM is




Fig. 3. An impractical way of building a 16 x 1 memory.

selected.

This is really the best way of going anyway. One of the things to worry about in any fast system is glitches. A glitch is a very short, unwanted pulse on some line, present either because of noise or because not all parts work at the same speed. If we were to combine the chip select circuit with the addressing circuit (by using the extra inputs to the address decoder for enabling), then we would always be selecting the memory at the same time as we would be providing it with an address. There would be a short time when the memory is already enabled but not yet settled down to the correct address. Its output would be nonsense briefly, until it had a chance to stabilize. The best procedure is to give the memory an address, get it started looking for the contents of that address, and then, just before we want the data, give it the enable and be reasonably sure that the output has settled down to the correct value.

There are some memory ICs that do provide separate chip enables and output enables. In some, this is because there may be latches in either the address decoders or in the output buffers; in others this may be done to conserve power by only operating the memory matrix when the IC is being used.

Experiment #59 Building a 16 x 1 ROM

Problem: The ROM we just

built had four locations with four bits each; that is, it was a 4 x 4 memory. What does the matrix look like if we need a 16 x 1 memory instead?

Solution: One solution might be to use a long, stringy matrix like that of Fig. 3, but this is not a good approach. In this case it isn't too bad, but can you imagine what a 4096 x 1 memory would look like?

This is a bad approach for several reasons. First of all, it is not an efficient use of semiconductor real estate. If you built the IC chip like this, it would be so long and narrow that it would tend to break. If you tried to fold the design into a Z shape, then the connections on the IC chip would become very messy. Finally, the address decoder would be a horror.

A better approach is to keep the matrix as close to a square as possible and add a multiplexer at the output.

Procedure: In Experiment #44 you used a 74150 multiplexer; now it's time to dust it off and put it back to work in the circuit of Fig. 4. Keeping in mind that the 74150 inverts its output so that a burned-out or missing diode generates a 0, use four lengths of wire to connect various combinations of 0s and 1s to the four address inputs. Note that each different address provides a different output.

Theory: What we are doing here is splitting the four-bit address needed to select one of the 16 locations into two parts. Two bits, A0 and A1, select one

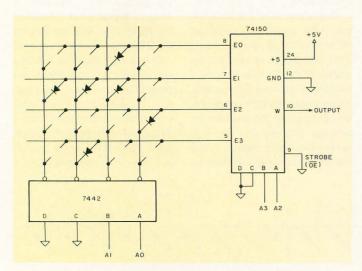


Fig. 4. A 16 x 1 ROM using a square matrix.

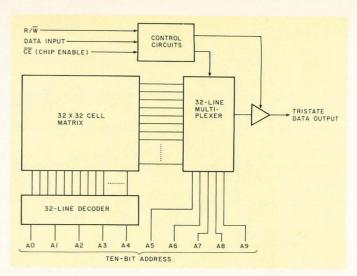


Fig. 5. Block diagram of 2102 1024 x 1 RAM.

of the four vertical input wires; the other two, A2 and A3, select one of the four horizontal output wires and feed its output to the 74150 output on pin 10.

The 7442 could select up to eight input wires, and the 74150 up to 16 outputs; so with these two ICs we could actually expand the matrix to an 8 x 16, for a total of 128 bits. It's obviously not a practical thing to do on the console breadboard, but it could be done. The 74150 even has a strobe input on pin 9, which could be used as an output enable.

Now we are on the right track—by building the matrix in a square shape, we can provide many bits of memory with relatively few vertical and horizontal interconnections. For instance, a 4096 x 1 memory could be built with a 64 x 64 matrix, having a total of only 128 wires. Doubling the size of the matrix to 128 x 128 would give us four times the number of bits, a total of 16K.

This explains why almost all popular memory integrated circuits use a square matrix; it is by far the most economical. In fact, the construction of a static RAM is not much different from the diode ROM; there is still a matrix of memory elements, with some addressing circuitry to select a vertical wire or column, and a multiplexer to select a horizontal wire or row. The only difference is in the type of circuit used to store one bit and in the precise way it is addressed.

The actual storage element for one bit is called a cell. In the diode ROM, the cell was a single diode; in an IC ROM, the cell would be a diode in series with a fusible link; in a static RAM memory, the cell is a flipflop; in a dynamic RAM the cell is a capacitor.

Fig. 5 shows the block diagram of a popular memory IC, the 2102 1K x 1 static RAM. This IC in all its various forms has been the workhorse of small computers for the past several years, and is only just now being replaced by larger ICs.

A matrix of 32 x 32 cells stores 1024 bits. A 32-line decoder at the bottom and a 32-line multiplexer at the right select one row and one column of the matrix. Since this is a RAM, it has both a data input and a data output-in this case on two separate pins (some memory ICs use the same pin for both input and output to a bidirectional bus.) Two additional inputs are a R/W or Read/ not Write control pin and a CE chip enable that enables both writing and reading. The output is a three-state output buffer.

MOS Handling Procedures

Before going on with the next experiment, let's talk about the correct way of handling MOS ICs

MOS stands for metal oxide semiconductor; it essentially applies to any device that uses insulated gate field-effect transistors. In such a transistor, we have a silicon device that has a control electrode called a gate; the gate may be silicon, but most often is metal. The gate is then separated from the silicon body of the transistor by a thin layer of silicon oxide, which is an insulator. Hence the name: Metal gate, Oxide insulator, Silicon transistor.

The oxide layer is extremely thin—just a few layers of atoms. If the voltage between the gate and the rest of the transistor exceeds even a moderate level, the insulator will break down, and a tiny spark will jump through it, punching a hole. Once that happens, the transistor is useless. Since the insulator layer is thin, not much voltage is required to damage it. Furthermore, not much current is needed either.

As it happens, each input to a MOS IC is connected directly to the gate of a MOS transistor. Thus it is easy to ruin an entire IC by exceeding the voltage limit on an input pin.

In particular, even static electricity is enough to damage the IC. If you rub your feet on a carpet you may generate thousands of volts and get a real shock as you touch a light switch. But just walking normally, rubbing your hands on your polyester slacks or sitting down in a plastic chair may generate enough voltage to zap an IC without your even feeling a slight tingle. In other words, just touching a MOS IC may damage it without your even knowing about it.

IC manufacturers try to minimize damage by including a protection circuit on each input. This consists of a resistordiode network whose purpose is to limit the applied voltage to a safe level. But since static electricity zaps are extremely rapid, the IC may be damaged even before the diode has a chance to conduct and eliminate the danger. Hence, these protection circuits help some, but are not 100 percent effective.

So the only safe way to prevent damage to such an IC is not to touch it. Since that's not possible, the next best precaution to take is, "Never let a static electricity voltage build up between you and the IC."

Since static electricity always involves small currents (at least, most forms do unless you talk about lightning), even a very high resistance between two objects is enough to prevent a voltage from developing. So vou can never develop a dangerous voltage between two things already connected. For instance, if a MOS IC is connected to a circuit and you rest your bare elbow on the box the circuit is mounted in (assuming that the circuit is in some way grounded to the box), then there cannot be a voltage between your hand and the IC. If




Fig. 6. 2102 RAM pin-out.

at this point you touch the IC pins, it is safe. (If, though, the box is connected to one side of the power line and you simultaneously touch a radiator, then the IC might be safe while you get fried.)

The point is that we have to apply a little common sense to MOS IC handling. Perhaps the best way to explain it is to describe some of the procedures I follow in my own lab.

When installing a MOS IC, I pick it up by the foam carrier it comes packed in before touching the pins themselves. When removing it from its carrier, I hold the carrier in one hand and the IC in the other and pull them apart. Then I place my fingers over as many of the IC pins as I can comfortably hold. Before installing it in a device, I reach for a convenient ground point on the device with my other hand and hold on while installing the IC. Obviously, I do this with the power turned off and the line cord unplugged.

If working on a printed circuit board, I raid my wife's kitchen for a two-foot piece of alumi-

the Computer Store ™

the store for the professional

The Computer Store is pleased to have off-the-shelf availability of

Apple II, the personal computer.



and Apple/Dow Jones Dow Jones I/II

On-line access to the Dow Jones data base of stock quotes and news stories for:

- Portfolio Analysis
- Financial Planning
- Financial AnalysisNOW! On YourPersonal Computer!

OFF-THE-SHELF DELIVERY — NEW OPENING: —

the Computer Store 1689 Massachusetts Ave. Cambridge MA 02138 617-354-4599

the Computer Store™

120 Cambridge St. Burlington MA 01803 617-272-8770

63 S. Main St. Windsor Locks CT 06096 203-627-0188

C34

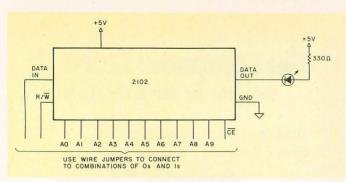


Fig. 7. 2102 RAM Experiment #60 wiring.

num foil, which I then spread out on my workbench. I keep the board on the foil and keep the ICs on it, too. I also try to keep my tools on it, as well as my elbow; I wear a short-sleeved shirt, so this makes a good connection. If my workbench had a metal top, then this precaution would not be necessary.

I use a soldering iron with a three-wire cord, so that the tip is grounded; but before using it I make sure to touch the tip to the foil worktop just in case. Some people suggest grounding the worktop, but this always makes me a bit worried, since it is possible to get a severe shock if you touch a grounded object at the same time as a hot one. An alternative would be to ground the worktop through a high-value resistor of 100k to 1 megohm. I may also use a cordless rechargeable soldering iron, when convenient, making sure to touch the aluminum foil just before soldering.

The purpose of the aluminum foil in all of this is to constantly keep shorting everything together—equipment, tools, ICs and me. That way there is never a chance to develop any damaging voltages between things that might touch the MOS IC.

Now, how to protect the 2102 IC we are going to use next? Follow the simple, commonsense rules above. Start with a blank prototyping socket on your breadboard and put in the ground wire from a ground point on your console to what will eventually be the ground pin of the IC, pin 9. Watch out: Unlike many of the 16-pin ICs you have used so far, this one does not use pins 8 and 16 for ground and power. Then get

another wire, connect one end to ground on the breadboard console and hold the other end in your hand at all times. Now take the IC out of the package, plug it into the socket and hook up all the other leads while still holding onto the ground wire with your other hand.

At any point, you can quit, leave the unit and come back later. Just make sure to grab the ground wire before touching any other part of the unit.

Experiment #60 The 2102 Static RAM Memory

Problem: How can we test a 2102 RAM to get a quick idea of whether it works or not?

Solution: We can hook it up in a simple circuit, store a few bits and see whether they stay stored.

Procedure: Fig. 6 shows the pin-out of the 2102. Make the ground, power and LED connections shown in Fig. 7. Then use short wire jumpers to make the remaining connections to the data input, read/write, address and chip enable pins.

Although these MOS ICs are TTL compatible, their input and output terminals do not behave like normal TTL inputs and outputs. For example, TTL inputs assume a high input level (or 1) if no connection is made to them. This was convenient in a number of prior experiments, where we could simply leave an input disconnected to save time. MOS ICs do not like that -they may assume either a high or a low voltage level, or some level between; they may possibly even oscillate. You must make all the jumper connections to either ground (0) or +5 volts (1).

Likewise, TTL outputs can

provide fairly sizable output currents; "TTL-compatible" MOS outputs cannot. That is why we changed the resistor in series with the LED from the 150 Ohms used earlier to 330 Ohms. In fact, if your LED will provide enough light, it might be better to go to even higher resistances, such as 470 Ohms or more.

Writing or reading from a RAM requires a specific sequence of carefully timed steps. Each of the inputs must be applied for a required time in order for the IC to properly accept the information and provide the right output. Read the following theory to see how this is done.

Theory: The sequence of steps required to use the RAM is shown in the manufacturer's data in the form of switching time waveforms as shown in Fig. 8 for a write and Fig. 9 for a read.

To store a bit in a certain address, follow this procedure; the number of each of the following steps is shown circled in Fig. 8:

- 1. Start with the chip enable and read/not write lines both high or +5 volts.
- 2. Place an appropriate address on the ten address lines. As shown in Fig. 8, to the left of the 2 dotted line, we have shown the address line dotted as well. This means that it doesn't matter what is on these lines at that time. But from time 2, all the way to time 10, the address lines must all be stable at either 0 or 1. This is why there are two curves drawn for the address lines, one high and the

other at ground. Some of the lines may be 0 and the others 1, but all must stay steady during the entire write cycle.

- 3. Now ground the chip enable line.
- 4. Next, place the data to be written on the data-in line. The data must again be stable until after writing is done, up until time 8.
- 5. Then switch the R/\overline{W} line low for a write.
- Now keep all the lines steady for a while.
- 7. Switch the R/ \overline{W} line back high to stop writing.
- 8. Leave the data applied for just a while longer; then you can disconnect it at time 8.
 - 9. Disable the chip.
- Any time after that, remove the address.

The total time for a write, from time 2 to 10, is called the write cycle time. For a standard 2102 this may be one microsecond, although there are faster versions.

A manufacturer's specification sheet will give various minimum times for the sequence shown in Fig. 8. For instance, the sheet may say that at least 200 ns must pass from the time that the address is applied to the time the read/write line goes low, or that the data must remain stable for at least 100 ns after the read/write line goes back high. In your experiment you do not have to worry about these minimum times since you will be working in seconds rather than billionths of seconds, but if you were designing a computer system you would have to read the spec sheets very carefully.

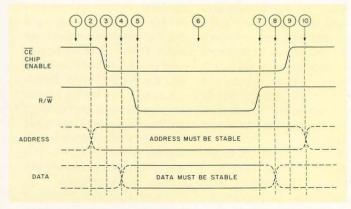


Fig. 8. Switching time waveforms for a 2102 write cycle.

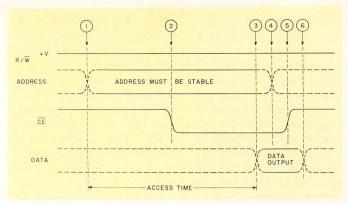


Fig. 9. Switching time waveforms for a 2102 read cycle.

Fig. 9 shows the switching times for a read cycle. To read, we would have to follow this sequence of steps:

- 1. Starting with the read/ write and chip enables both high, apply an address.
- 2. Wait for the address decoders in the IC to work, and then make the chip enable low.
- 3. Wait for the data to come out.
- 4. and 5. Remove the address and chip enable. These could be removed together, or the address could be disconnected slightly earlier as shown. In your experiment, though, disable the IC first.
- 6. The data will still come out for a short time after the chip enable goes back high, but don't count on it.

The total time for the entire cycle is called the read cycle time, but another time is often quoted and that is the read access time shown in Fig. 9. This is the time from when the address is first applied to the time data first starts to come out. Typical access times for small home computers range from 600 ns down to as low as 250 ns. Much faster RAM memories are available, but not yet used to any great extent in small computers since they are faster than the microprocessors used with them. Very fast memory ICs would be used in large computers that use TTL or ECL ICs in the processor.

Comment: Although this experiment does a quick check of how a 2102 memory operates, it is really not a thorough check. To do a complete test, we would have to store a variety of

bits into different locations, make sure each bit gets read out correctly and also check that writing into one location does not affect any other location. In general, it is a fairly lengthy test and, although we could design a special purpose tester to test 2102 chips, it would be easier to just do a quick check, install it in the computer and then write a computer program that would exhaustively test memory under program control.

More Theory: Static and Dynamic RAMs

It's not practical to do an experiment with dynamic memories, so let's just talk about them.

As mentioned earlier, the major difference between different memories is the type of memory cell used in their memory matrix. We mentioned that a static RAM uses a flip-flop as the basic cell, whereas a dynamic RAM uses a capacitor. Fig. 10 shows the circuits of two typical cells.

The static cell has five gates, using at least five transistors. There is one vertical input line, but two horizontal lines for each row of cells; one of these is used to write in a 0 and the other to write a 1.

Gates 3 and 4 make up the flip-flop that acts as the main memory element. Gates 1 and 2 are used to gate 0 and 1 inputs into the flip-flop, while gate 5 lets the output get from the cell back to the horizontal output wire.


Now compare this with the cell for the dynamic flip-flop. Here the cell consists of just



PUT THIS IN YOUR PIPE AND "SMOKE" IT: \$150 less for the best!

SMOKE SIGNAL BROADCASTING'S M-16A STATIC MEMORY SYSTEM

IS NOW BEING OFFERED AT A NEW LOW PRICE OF \$379.00 - \$150.00 LOWER THAN EVER BEFORE!

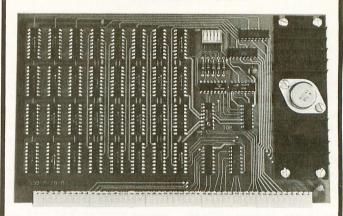

FEATURES:

- SWTPC 6800 Plug Compatible
- •STATIC No refresh required
- Allows SWTPC 6800 expansion to 48K
- •Low Power
- Uses Single +8 Volt Supply

The M-16A STATIC random access memory system, with a total storage capacity of 16834 words of 8 bits each, is switch selectable to any 4K starting address, and a hardware write protect switch is also included. The system's storage elements are 4K by 1 STATIC memory chips which store 4 times as much in only 12% more space than the low power 2102's. Typical access time is fast enough to work with a 6800 based computer operating at 2 MHz and all systems are factory tested at 2 MHz.

Send for FREE NEW Computer Products Catalog includes our complete line of 6800 Super Software products.

SMOKE SIGNAL BROADCASTING



6304 Yucca/Hollywood, CA 90028 (213) 462-5652

S46

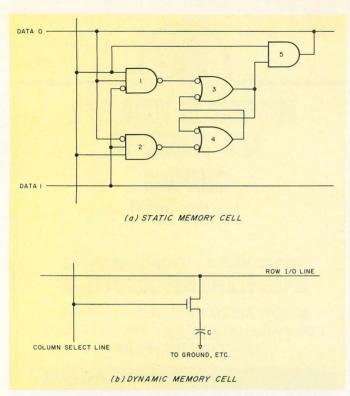


Fig. 10. Two types of RAM memory cells.

one transistor and a capacitor, with the capacitor actually a part of the IC structure and not a separate component at all. Seeing how much simpler the dynamic cell is, we can understand why dynamic memory ICs are cheaper and smaller.

In normal operation, the transistor in the dynamic cell is off or nonconducting, and the capacitor is disconnected. If it were a perfect capacitor, then whatever voltage it is charged to would stay there forever. In practice, though, there is some leakage, so the capacitor will stay charged for only a little more than two milliseconds.

Whenever a vertical input line—called a column select line—is turned on, the transistor turns on and connects the capacitor to the horizontal or row input/output line.

For a write to memory, the capacitor can be charged or discharged by placing either a high or low voltage on the row I/O line and then turning on the column select line. Once this is done, the capacitor will remember the bit for about two milliseconds.

For a readout of a bit, the column select line is again turned on. The voltage on the capacitor is connected to the row I/O line and detected by a sense amplifier. If the voltage is low, the sense amplifier will detect this as a 0 and force the voltage even lower. If the voltage is high, then the sense amplifier will detect this as a 1 and force the voltage even higher. This has the effect of reading the bit out of memory and also recharging the capacitor back to its original voltage. As long as a read is done at least once every two milliseconds, the capacitor will keep being recharged and

will continue to hold the original bit. This is called refreshing.

In practice, each row I/O line has its own sense amplifier. So whenever any column select line is turned on, all the cells on that column get refreshed at the same time. Thus, it is only necessary to cycle through all the columns once every two milliseconds. This is what is done by the refreshing circuits on dynamic memory boards.

Since dynamic memory ICs can use smaller chips than static ICs of the same capacity, it makes sense to use smaller IC packages as well. Thus, there are many fairly large dynamic chips that use only 16or 18-pin packages. To save on pins, many of these use multiplexing on the address pins. For example, Fig. 11 shows the block diagram of an Intel 2117 16K dynamic RAM, Although 14 bits are needed just to address 16K bits, this IC needs a total of only 16 pins altogether. This is done by breaking up the 14-bit address into two 7-bit chunks. One group of seven bits is called the column address and selects one of 128 columns in the matrix; the other seven bits are the row address and select one of 128 rows. The two 7-bit chunks are sent into the IC separately, one after the other, over the same seven address

Instead of one large 128 x 128 matrix, this IC has two 64 x 128

arrays (array is another word for matrix) with the sense amplifiers connected in the middle between them.

There are several new signals shown here: RAS and CAS are row address strobe and column address strobe signals, which tell the IC which of the two address halves is on the address inputs. WE is a write enable.

The second advantage of breaking up the address bits as shown here is that the entire memory can be refreshed once every two milliseconds simply by sending in a whole batch of different column addresses.

Cycling through all the 128 column addresses can be done either by circuits on the memory board or by the processor itself. For instance, the Z-80 has the capability of refreshing dynamic memory automatically.

Preview

We have now finished looking at memory circuits and ICs. Before we can go on to look at a complete computer design, we now have several more things to look at: various ways of connecting input and output devices, the control signals used by microprocessors and how to control them, and the internal organization of a microprocessor.

Next time we will tackle the input/output problem. Stay tuned!■

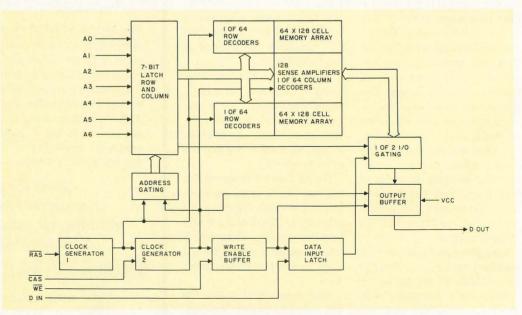


Fig. 11. Block diagram of an Intel 2117 16K dynamic RAM.

We've gathered the family to show you why PERCOM's™ Number 1

in cassette data systems for microcomputers.

Pardon us for doing a little boasting, but we're proud of our family. Proud of each member's reputation for performance and reliability. And pleased that we can offer the best in cassette data systems and data terminal interfacing at low, home-computing prices.

It took more than guts and a little luck to forge a position of leadership. We're number 1 because you get more when you buy PERCOM™. The reason, simply, is experience. Every product described in this ad is based on nearly 10 years of crucial involvement in the design and manufacture of computer peripherals that use cassettes for mass storage.

Experience. It's why we developed a more reliable data cassette for home computing. Why our interfacing units provide **both** cassette and data terminal interfacing. Why you get the fastest, most reliable cassette data rates from PERCOMTM. Experience. It's *the* reason for PERCOMTM.




For your SS-50 bus computer — the CIS-30 \pm

- Interface to data terminal and two cassette recorders with a unit only 1/10 the size of SWTP's AC-30.
- Select 30, 60, or 120 bytes per second cassette interfacing, 300, 600 or 1200 baud data terminal interfacing.
- Optional mod kits make CIS-30+ work with any microcomputer. (For MITS 680b, ask for Tech Memo TM-CIS-30+—09.)
- KC-Standard/Bi-Phase-M (double frequency) cassette data encoding. Dependable self-clocking operation.
- Ordinary functions may be accomplished with 6800 Mikbug™ monitor.
- Prices: Kit, \$79.95; Assembled, \$99.95.

Prices include a comprehensive instruction manual. Also available: Test Cassette, Remote Control Kit (for program control of recorders), IC Socket Kit, MITS 680b mod documentation, Universal Adaptor Kit (converts CIS-30+ for use with any computer).

MIKBUG® Motorola, inc.



For your S-100 computer — the CI-812

- Both cassette and data terminal interfacing on one S-100 bus PC board.
- Interfaces two recorders. Record and playback circuits are independent.
- Select 30, 60, 120, or 240 bytes per second cassette interfacing, 110 to 9600 baud data terminal interfacing.
- KC-Standard/Bi-Phase-M (double frequency) encoded cassette data. Dependable self-clocking operation.
- Optional firmware (2708 EPROM) Operating System available.
- Prices: kit, \$99.95; assembled, \$129.95.

Prices include a comprehensive instruction manual. In addition to the EPROM Operating System, a Test Cassette, Remote Control Kit (for program control of recorders), and an IC Socket Kit are also available.



For your data storage — Pilon-30™ data cassettes

- Orders-of-magnitude improvement in data integrity over ordinary audio cassettes
- Pilon-coated pressure pad eliminates lint-producing felt pad of standard audio cassettes.
- Smooth pilon coating minimizes erratic tape motion.
- Foam pad spring is energy absorbing. Superior to leaf spring mounted pad which tends to oscillate and cause flutter.
- Five-screw case design virtually precludes deformation during assembly.
- · Price: \$2.49.

PERCOM™ products may be purchased from home computer dealers nationwide, or may be ordered direct from the factory.*

*Texas residents must include an additional 5% for factory orders. MC & Visa cards honored.

PERCOM™ 'peripherals for personal computing'



PERCOM DATA COMPANY, INC.
DEPT. K
318 BARNES • GARLAND, TEXAS 75042
Phone: (214) 272-3421

Motorola's Latest: The MC6802

The author really likes the 6800 microprocessor—but he likes the 6802 even better.

Tim Ahrens 7405 Ladybug St. Austin TX 78744

Py now, most of you have heard about the 6800 microprocessor and some of its capabilities. I think that it is the number one MPU device, but since all don't share my opinion, let's just say that it is one of the four most popular chips. Several different manufacturers have based their systems on the 6800, and software for it has been growing by leaps and bounds.

I'm not going to say much more about the 6800 itself, since much documentation has already been printed. Even though I am a strong 6800 supporter, I have found a device that surpasses it in many ways. It's a family member—the 6802, which combines all of the features of the 6800 plus the following:

- 1. On-chip clock circuit.
- 2. 128 x 8 bit on-chip RAM (0000-007F).
- 3. 32 retainable bytes of RAM (low-power standby).
- 4. Software compatibility with the 6800.

The on-chip clock circuit is just what it says; add an external crystal and capacitor to provide all the necessary clocks to the MPU (2-phase clocks, etc.). The specifications rate this crystal frequency at 4 MHz, but I have been running my circuit with a 5 MHz crystal.

Now, don't get your hopes up, Z-80 fiends; the CPU has a divide-by-four circuit in it to work with! Still, 1.25 MHz is nothing to sneeze at. When you consider the various problems of the "faster" CPUs, with the necessary wait states, etc., the extra speed doesn't really mean much—especially when used in the hobbyist mode.

The on-chip RAM is located from 0000 to 007F hex, with the first 32 bytes having the capability of being retained in a low-power mode by utilizing the Vcc standby, thus allowing memory retention during a power-down situation. This RAM can, of course, be turned off so it won't interfere with any external memory boards.

The 6802's Evolution

As you can see from the pinout diagram in Fig. 1, there are really only subtle differences in the two relatives; however, they are definitely not pin-for-pin compatible. Rather than repeat data of the entire device, and risk boring you, I will give only a brief description of the signals that are different than those on the 6800.

RAM Enable (RE). A TTL-compatible RAM enable input controls the on-chip RAM of the 6802. When placed high, the memory is enabled to respond to the 6802 controls; when low, the RAM is disabled. This pin may also be utilized to disable reading and writing the on-chip RAM during a power-down situation. The RE must be low 3 cycles before Vcc goes below 4.75 during power down.

EXtal and Xtal. These connections are for a series resonant fundamental crystal (at cut). A divide-by-four circuit has been added to the 6802 so that a 4 MHz crystal may be used in lieu of a 1 MHz crystal for a more cost effective system... maybe even try an inexpensive 3.579 MHz TV color burst crystal!

Enable (E). This pin supplies the clock for the MPU and the

rest of the system. This is a single phase, TTL-compatible clock, and may be conditioned by a memory ready signal. It is equivalent to the @2 on the 6800.

Vcc Standby. This pin supplies the dc voltage to the first 32 bytes of RAM as well as the RAM enable (RE) control logic. Thus, retention of data in this portion of the RAM of a power

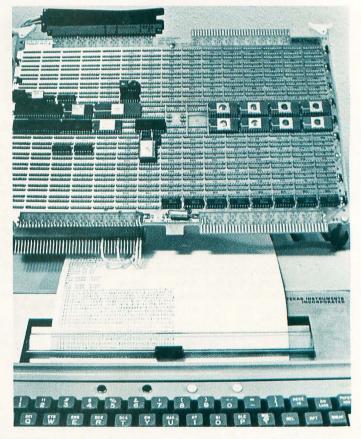


Photo 1. The basic system, shown here on a wire-wrap card, is the beginning of a portable computer system in a typewriter case with keyboard and MITE printer. To demonstrate the processor's capabilities, the system was connected to an RS-232 printer (a TI Silent 700).

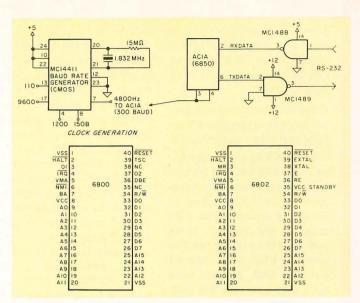


Fig. 1. 6800 vs 6802 pin-outs, RS-232 transmitter/receiver and MC 14411 baud rate generator. The 6800 and 6802, although not pin-for-pin compatible, are 100 percent software interchangeable.

up, power down or standby mode is guaranteed.

OK, so now we have a really nice processor. What can it do? First, a little history. . . .

Since the advent of the MC6800, the easiest monitor ROM to use was MIKBUG. It was taken by SWTP, and the first Motorola Evaluation Board was supplied with it. Designated the MC6830L7 ROM, it was designed to talk to a peripheral interface adapter (PIA), the MC6820. Although it worked quite well with this device, it was a bit difficult to change clock speeds, and was rather inefficient. Why use a parallel port for serial data?

Motorola soon realized these problems and developed the Minibug II and III. With these, the asynchronous communications interface adapter (ACIA) was utilized, and some other software development features were implemented.

Enter the 6846

The 6846, in conjunction with the MC6802, or even the 6800, makes a very cost effective microprocessor system. Here's why: The 6846 contains ROM, I/O and a timer all in the same package. It contains 2048 bytes of mask-programmable ROM, an 8-bit bidirectional data port with control lines, and a 16-bit programmable timer-counter.

At the present time, the ROM

contains MIKBUG 2.0 with a high-speed audio cassette interface program, and is fantastic (more on that later).

General Description

Programmed storage. The mask-programmed ROM section is similar to other ROM products of the 6800 family. It is organized in a 2048 x 8 bit array to provide read only storage for a minimum microcomputer system. Two mask-programmable chip selects are available for user definition.

Address inputs A0-A10 allow any of the 2048 bytes of ROM to be uniquely addressed. Internal registers associated with the I/O functions may be selected with A0, A1 and A2, and the mask-programmed chip selects. The bidirectional data lines (D0-D7) allow the transfer of data between the MPU and the 6846.

Timer-counter functions. Under software control, this 16-bit binary counter may be programmed to count events, measure frequencies and time intervals, or similar tasks. It may also be used for square-wave generation, single pulses of control duration and gated delayed signals. Interrupts may be generated from a number of conditions selectable by software programming.

The timer-counter control register allows control of the in-

terrupt enables, output enables and selection of an internal or external clock source. Input pin CTC (counter-timer clock) will accept an asynchronous pulse to be used as a clock to decrement the internal register for the counter timer.

If the divide-by-eight prescaler is used, the maximum clock rate can be four times the master clock frequency with an absolute maximum of 4 MHz. The gate input CTG accepts an asynchronous TTL-compatible signal that may be used as a trigger or gating function to the counter-timer.

A counter timer output (CTO) is also available and is under

the software control via selected bits in the timer-counter control register. This mode of operation is dependent on the counter-register, the gate input and the external clock.

Parallel I/O port. The parallel bidirectional I/O port has functional operational characteristics similar to the B port on the MC6820 PIA. This includes eight data lines and two handshake control signals.

The control and operation of these lines are completely software programmable. This interrupt input (CP1) will set the interrupt flags of the peripheral control register. The peripheral control (CP2) may be pro-

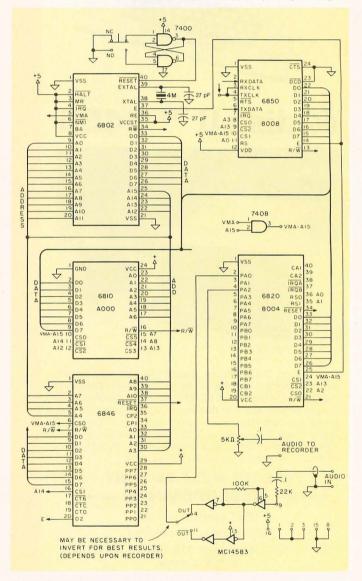


Fig. 2. This diagram is a very basic system layout using the 6802 and 6800 family of parts. It contains 256 bytes of RAM at 0000 (hex) and another 256 at A000 hex. This configuration can provide both serial and parallel data ports, as well as an audio cassette interface with file-searching capabilities. The system can be expanded (with appropriate buffers) to its full memory capability and 6800 software compatibility.

the Computer Store ™

The Computer Store is pleased to have off-the-shelf availability of

Apple II, the personal computer.



& disk II ™ \$495



The highest performance, easiest to use, and lowest priced floppy yet offered by a personal computer maker, Apple Computer's Disk II makes possible a wide variety of new applications including personal finance, small business systems, home record keeping, and many more. Equipped as shown with controller card, cable and drive, Disk II is priced at an introductory offer of \$495. Introductory offer expires July 31, 1978.

OFF-THE-SHELF DELIVERY — NEW OPENING: —

the Computer Store 1689 Massachusetts Ave. Cambridge MA 02138 617-354-4599

the Computer Store™

120 Cambridge St. Burlington MA 01803 617-272-8770

63 S. Main St. Windsor Locks CT 06096 203-627-0188

C34

grammed to act as an interrupt input or as a peripheral control output. As an input or output, CP2 is compatible with standard TTL logic.

The only portion of the 6846 I will be using in this article is the ROM that contains MIKBUG 2.

The MIKBUG 2 is implemented in the MC6846 as a 2K byte firmware program for the development and debugging of 68XX/6846 systems. The ROM occupies the address space from F800 hex to FFFF hex. It is primarily intended to operate with the 6802, but will work quite well with even the plain vanilla 6800.

For MIKBUG 2 to execute, it assumes that there is RAM in address space A000 to A07F. It also assumes an MC6850 ACIA (serial port) at address 8008 hex. This ACIA interface allows MIKBUG 2 to operate with a Teletype or an RS-232 terminal, depending on the type of interface drivers provided.

An audio tape interface called Texortape is also provid-

BUG 2.

The Texortape Cassette Interface works great, and because of the fast speed, compared to KC standard, for example, I have discarded the idea of using other types of fast memory access, such as a disk system . . . at least for a while! It will also search through voice recordings for a file number. In over 3.5 million bits recovered at 2000 baud, I have had no failures using Memorex MRX2 and an inexpensive J.C. Penney audio recorder (cat. #851-0018).

The system that my 6802/ 6846 is configured in will eventually be a small terminal with a MITE printer (see Kilobaud, Nov. 1977, "Consider a MITE Printer," p. 38), with about 15K of memory, and 8K BASIC in EPROM. The board (see Photo 1) is of the wire-wrap variety, and is the only way to go. All that's connected are the basic MPU, ROM, ACIA, PIA and other external accessories (1K 2102 memory and the 8K BASIC EPROMS). The MC6802 and 6846 with MIKBUG 2 are avail-

| 1 | Loads formatted object taped into memory |
|--------|---|
| M NNNN | Memory change at location NNNN |
| P | Print/punch ASCII formatted object tapes |
| R | Display contents of MPU user's registers |
| | |
| S1 | Stop bit selection for ACIA (two stops) |
| S3 | Stop bit selection for ACIA (one stop) |
| В | Print all breakpoints |
| C | Continue execution from current location |
| N | Execute next instruction |
| TNNNN | Trace NNNN instructions |
| G NNNN | Go to user program at location NNNN |
| D | Delete all breakpoints |
| U NNNN | Reset breakpoint at location NNNN |
| V NNNN | Set a breakpoint at location NNNN |
| E | Texortape Cassette Interface |
| | C—Check tape |
| | L—Load memory to tape |
| | D—Dump from memory to tape |
| | S-Set baud rate (400, 800, 1200, 1600, 2000 |
| | baud) (1200 baud data rate equals 1650 baud |
| | two-stop bit async!!!) |
| | two-stop bit asyllotti) |

Table 1. MIKBUG 2 features.

ed in the ROM. This interface assumes a PIA at 8004 hex to implement this interface and uses one MC14583 for the receiver buffer from the audio cassette. It uses the A side of the PIA.

Table 1 is a summary of the features provided with MIK-

able at any Motorola Semiconductor distributor.

My thanks go to Gary Poss for his photographic work.■


Reference

MC6802 and MC6846 Advance Information Data Sheets. Motorola, Inc., 1977.

TARBELL SETS STANDARDS

For Hobbyists and Systems Developers

Sales to thousands of hobbyists over the past two years have proven the Tarbell Cassette Interface to be a microcomputer industry standard. Tarbell Electronics continues research and development to produce new and efficient components to fill hobbyists' changing needs.

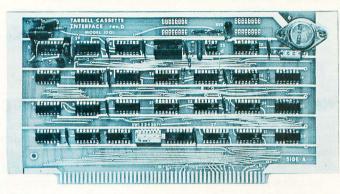

TARBELL FLOPPY DISC INTERFACE

- Plugs directly into your IMSAI or ALTAIR* and handles up to 4 standard single drives in daisychain.
- Operates at standard 250K bits per second on normal disc format capacity of 256K bytes.
- Works with modified CP/M* Operating System and BASIC-E Compiler.
- Hardware includes 4 extra IC slots, built-in phantom bootstrap and on-board crystal clock. Uses WD 1771 LSI Chip.
- Full 6-month warranty and extensive documentation.
- PRICE: Kit \$190 Assembled \$265

TARBELL CASSETTE INTERFACE

- Plugs directly into your IMSAI or ALTAIR*
- Fastest transfer rate: 187 (standard) to 540 bytes/second
- Extremely Reliable—Phase encoded (self-clocking)
- 4 Extra Status Lines, 4 Extra Control Lines
- 37-page manual included
- Device Code Selectable by DIP-switch
- Capable of Generating Kansas City tapes also
- No modification required on audio cassette recorder
- Complete kit \$120, Assembled \$175, Manual \$4
- Full 6 month warranty on kit and assembled units




CP/M with BASIC-E and manuals: \$100

Compatible Disc Drives

Ask about our disc drives priced as low as \$525.

TARBELL PROTOTYPE BOARD Model 1010

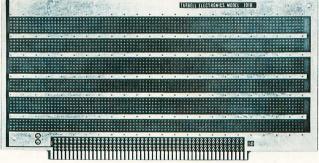

- Gold plated edge pins
- Takes 33 14-pin ICs or
- Mix 40-pin, 18-pin, 16-pin and 14-pin ICs
- Location for 5 volt regulator
- Suitable for solder and wire wrap
- ALTAIR/IMSAI compatible **Price:** \$28.00

For fast, off the shelf delivery, all Tarbell Electronics products may be purchased from computer store dealers across the country. Or write Tarbell Electronics direct for complete information.

 * ALTAIR is a trademark/tradename of MITS, Inc. CP/M is a trademark/tradename of Digital Research



20620 South Leapwood Avenue, Suite P Carson, California 90746

(213) 538-4251

T11

TRS-80 Update: Level II BASIC

Here are the answers to questions asked most often about Radio Shack's new Level II BASIC.

rom a user's point of view, the usefulness of any microcomputer is directly proportional to the "power" of the language it supports. Since many hobbyists are not professional programmers, BASIC will be their primary language. Although you might plan to learn machine or assembly language—and I say, "More power to you!"—the bulk of your programming will probably be in BASIC.

Radio Shack had you in mind when they built the TRS-80 with BASIC permanently stored in ROM, rather than read in from paper or magnetic tape. Your primary language is always there, yet you may program in machine or assembly language when you wish by CLOADing Radio Shack's T-BUG (monitor) or their Editor/Assembler from magnetic tape.

Radio Shack's Level I BASIC language is the ideal language to learn on, and is supported by an excellent tutorial user's manual. It will teach BASIC to anyone, even those with no prior experience. At some time, however, you'll find yourself ready to advance beyond the capabilities of Level I. At that point, Radio Shack's exchange of your Level I ROMs for Level II ROMs for only \$99 is a tremendous microcomputer language buy. What does it buy you? Read on ...

Level II is a 12K extended BASIC, as opposed to Level I's 4K, yet those who are using it will tell you it is much more than "three times the language." For starters, it increases the cassette baud rate from 250 to 500 baud. Identical programs store in less memory space, even though the numerous command abbreviations allowed in Level I are not supported in Level II. Execution times are significantly improved in Level II. Benchmark test no. 7 (see *Kilobaud* No. 10, p. 23) time improved from 110.1 seconds to 78.3 seconds in Level II.

Variables

Remember that one A(n) array allowed in Level I? Well, you can now have arrays named A through Z, A1 through Z9 and AA through ZZ. That's more than 900 arrays (limited, of course, by memory size)! In Level I you could have only one dimension, such as A(16), but you could not have a twodimension array such as B(23,12). In Level II you can have multidimension arrays, of more than two dimensions . . . D5(23,4,12,5). Arrays may be designated as single-precision (six significant digits), doubleprecision (16 digits), integer (no decimal points) or string variable arrays (alphanumeric).

Yes, that also means that numeric variables can be double-precision to 16 significant digits. (Those of you making over 100 billion dollars per year can compute your income tax to the penny with a digit left over.) Integer variables from - 32768 to 32767 are allowed.

Numeric variables can also be designated as integer, single or double-precision.

In Level II you can now raise numbers to any desired power. for example, 1432.75, using the 1 key. Trigonometric functions such as COS, ATN, TAN are included along with SQR, EXP, SIN and other more advanced mathematical functions not found in Level I. Numeric variable names allowed are the same as for arrays: A-Z, A1-Z9 and AA-ZZ. Integer, singleprecision, double-precision and string variables are specified as A%, A!, A# and A\$, respectively; and all of those just listed are distinct variables (i.e., they may exist in the same program at the same time, even though the variable names are all "A").

If you add them all up, Radio Shack Level II allows somewhere in the neighborhood of 3600-plus variables! But there's one more thing: Variables may have multi-letter names such as "PROFIT" or "LOSS." The only restriction is that you cannot have a "reserve word" (BASIC statement, command, etc.) nested inside one of your variable names, and you must remember that the TRS-80 recognizes only the first two letters of the name, so no two can start with the same first two letters.

String Variables

In Level I the TRS-80 could ask your name and mine, then call us by name while playing a game, but it could not compare our names. It could not tell which came first alphabetically, or even if your name and mine were the same. String variables were limited to 16 characters, and only two, A\$ and B\$, were allowed.

As indicated above, string variables under Level II may have the same names as other variables, and the length of each string may be up to 255 characters. (Remember those limits imposed by the amount of memory your TRS-80 has.) On "power-up," a total of 50 bytes of memory are allocated to strings. You may allocate more (or less) by the command CLEAR (n), with "n" being the number of bytes desired. This may be used as a program or command (keyboard) state-

Full string handling-comparisons, concatenation, etc. -is allowed under Level II BASIC. Commands include: ASC(X\$), which returns the ASCII code for the first letter of the string; FRE(X\$), which returns the number of free bytes of memory allocated to strings; LEN(X\$), which returns the number of characters in a string; LEFT\$(A\$,4), which returns the leftmost portion of A\$, up to the fourth character; MID\$, which returns a specified portion of the center of a string; RIGHT\$, which returns the specified number of characters in the right side of the string; VAL(X\$), which converts X\$ to a numeric variable; STR\$(x),

which converts the numeric variable X to a numeric string variable; and INKEY\$, a neat little item that permits input of information while the program is executing (the program does not have to stop and wait for your input as with INPUT!). CHR\$(x) returns the ACSII character function or graphic code for the number "X."

Cassette Operation

As stated, Level II raises the cassette baud rate from 250 to 500 baud. Level II cassette files are named; for example, you may specify CLOAD"STAR TREK." The recorder will bypass all files until it locates "STAR TREK," then that file will be loaded. After you've CSAVEd a program, you can rewind, type CLOAD?, and the TRS-80 will compare your SAVEd file with the one still in memory, byte for byte, verifying that it SAVEd properly. The SYSTEM command allows loading of machine-language cassette tapes.

Editing

Radio Shack's Level II BASIC allows you to edit program lines. Remember typing all of those lines over from scratch when a change within the line was required? No more! Simply type in EDIT n (n being the line number), and a dozen or so oneletter edit commands allow deletion, insertion or changing of a character or characters in the line without retyping the entire line . . . only that part to be changed. When a syntax error occurs, the offending line automatically enters the "edit" mode. Error codes in Level II, by the way, are much more comprehensive and include about 23 separate codes that are displayed when the error occurs.

Speaking of errors, you can "trap" them with Level II. An ON ERROR GOTO command sends the program to a specified line when any error occurs. The command is written into an early program line. When the subroutine is completed, a RETURN, RETURN NEXT (return to the line following the one where the error occurred) or RETURN n (return to



line No. n) continues execution.

But, you say, "My program doesn't work; how do I know the error trapping will work?" Well, there is also a command ERROR n, which generates a specified type of error (n), to test it with. Your subroutine may include instructions to print ERR and ERL, which print the type of error, and the line in which it occurred, respectively.

DIM

What about those pesky "DIM" statements I find in programs in magazines and books? Well, DIMension simply sets aside memory space for arrays. It is used in Level II when the dimension of any array exceeds the number 10. In case your array is used in the first part of the program, and later on you need that memory but you're through with the array, simply insert a program line that says ERASE. That cancels the reserved space.

You might wish to permanently specify certain letters as specific names for a definite kind of variable, so you won't have to specify A! or K# each time you use them. DEFINT A,B,K-M specifies all variable names beginning with A, B and

K through M as INTEGER variables. Likewise, you can use DEFSNG (single precision), DEFDBL (double precision) and DEFSTR (string variables). Variables can be converted from one type to another with CDBL, CINT and CSNG. All variables are set to "0" or "null" when CLEAR, RUN or NEW is executed.

Automatic Line Numbering

The command AUTO produces automatic line numbering. If that's all you type, it numbers lines beginning with line 10 and continuing in increments of ten. Typing AUTO 150 produces lines beginning with 150, in steps of ten, and AUTO 200,50 starts with line 200 and produces lines 200, 250, 300, 350, etc. Although Radio Shack didn't have enough space left in the 12K ROM to offer line renumbering, they are planning to offer that feature as a machine-language program on cassette. The USR(0) command allows access to machinelanguage subroutines.

Trace

How many times have you written a program that ended up in a never-ending loop, and

you couldn't find out where it was hanging up... or one that seemed to be skipping a part of the program? Your only choice in Level I was to write in STOP commands at various places. Take heart! Level II allows you to tell your TRS-80, TRON (trace on)

As each line is executed, the number of that line appears on the video monitor, in brackets, so you can see exactly how the program is executing. When you've found the problem, type TROFF and return to normal operation. Between TRACE, editing, error codes and error-trapping routines, your debugging time should be reduced to almost nothing!

IF ... THEN

Remember those extra lines when you wanted to say, "If something is true do this, but if not, then do that"? Well, now you can say "IF...THEN... ELSE..." and even "IF NOT...THEN...ELSE." Quite an improvement, wouldn't you say?

Formatted Print

The same PRINT AT (but now it's PRINT@) and PRINT TAB statements are used in Level II as in Level I. You can line up in-

formation on the screen with them, but remember those pesky decimal places that took a subroutine to "round off" so they'd look right? Well, with the command PRINT USING, and some format specifiers, you can round off to the desired number of decimal characters, insert commas to separate every three digits - instead of \$25232.2367, you can have \$25,232.24—specify a floating dollar sign, floating + or signs preceding or following the numbers, and fill all number fields with preceding asterisks if you wish. Decimal points will line up, and you can deal in whole dollars or pennies, without fractions of a cent.

Other Features

By no means will this article cover all of the features of Radio Shack's Level II BASIC. The intention is to bring out those features which are not in Level I, and which hobbyists will find of greatest interest. All of the "standard" BASIC features found in Level I are included in Level II, except abbreviation of commands, and will not be dealt with again here. (By the way, I lied a little; two abbreviations are used in Level II: "?" for PRINT and "" for REMarks.)

Level I-type TRS-80 graphics remain unchanged, except that they execute somewhat faster. Larger letters (32-character lines) are available by keyboard or program command in Level II, as is the nice "keyboard rollover" feature (you don't miss a letter if your finger hasn't released the previously typed key).

You advanced-programmer types will appreciate PEEK and POKE (allows looking at or placing a specified value in a specified RAM location); USR(0), which allows access to a machine-language subroutine (more USR calls will be allowed in Disk BASIC); and VARPTR(C), which gives you the address in memory where the variable "C" is stored. Userdefined functions are not supported in Level II, although they should be in Radio Shack's Disk BASIC, which comes with their mini-disk drive. (Details of the DOS and Disk BASIC were not available at time of writing.)

Powering up a Radio Shack Level II TRS-80 immediately produces the question, "MEMORY SIZE?" The answer is *not* the number of RAM bytes in your machine. Unless you're using a machine-language subroutine, the answer is simply to press the ENTER key. The procedure for a machine-language subroutine is explained in the Level II manual, but the question is actually asking you to specify the upper limit of memory address available to BASIC. A

complete memory map is included in the manual. Radio Shack's Level II manual is a user's manual rather than a teaching aid, as was Level I. It is well written and understandable, if you are already conversant with the Level I manual's contents.

Of course, Level II includes the necessary commands for input and output for printers, two cassettes, disk, etc., which are available with the use of Radio Shack's Expansion Interface. Although a number of disk commands are in the ROM, they are only the "hooks" that link Level II with Disk BASIC, and an attempt to use them will cause an error to occur.

In Level II program lines, logical lines and string variables all may be up to 255 characters long, although a maximum of 64 characters is recommended because of the limitation of the line length on video monitor. (It makes for easier reading.) Logical comparisons use the words AND and OR, rather than Level I's * and +.

It is likely that some of this information has excited some of you engineering types, so I'll answer your next question... even though it doesn't really have anything to do with Level II BASIC, the subject of this article. Radio Shack will have for sale later this year a TRS-80 ser-

vice manual, including schematics and logic diagrams.

A list of statements, commands, etc., can be obtained by writing to: TRS-80 Computer Marketing, 1600 One Tandy Center, Fort Worth TX 76102. That list will include a brief description of all commands, more extensive than has been included here.


The bottom line is that Radio Shack's Level II BASIC seems to be a very powerful and very complete microcomputer language. I have used several excellent languages on both hobby and business microcomputers, and although your evaluation may vary depending on what you "grew up with," I think you'll find Level II to be one of the best micro languages on the market. If your primary interest is programming in BASIC, then having it in ROM is a definite plus.

One last point: Obviously, your Level I (250 baud) tapes won't run on a Level II machine. Radio Shack includes on cassette with each Level II kit an ingenious machine-language program that converts your Level I programs to Level II format. You load the conversion tape in the SYSTEM mode, load your Level I tape, press ENTER, then CSAVE the result on tape as a Level II program! What more could you ask for?

M9900 CPU-16 BIT MINI for the S-100 BUS with PASCAL

The M9900 CPU brings the most powerful single-chip processor available today—the TI TMS9900—to the S-100 bus and supports it with powerful software. Included with the CPU board are Disc Operating System, BASIC, Assembler, Linking Loader, Text Editor, and Interactive Debug. The powerful Pascal compiler is only \$150 more.

Move up to a 16 bit machine and the power of Pascal without losing the economy and selection of the S-100 bus — move up to the M9900 CPU.

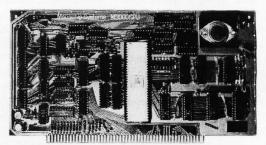


Marinchip Systems

16 Saint Jude Road Mill Valley, Ca. 94941 (415) 383-1545

Kit \$550 Assembled \$700 Documentation \$20

Supellam

16K STATIC FOR \$299

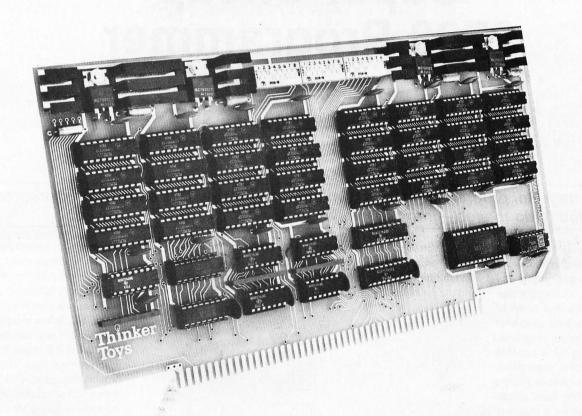

Introducing SuperRam™ 16K static memory, the one that's leaping tall price barriers at a single bound. It saves you about \$100 on the usual cost of a big 16K memory for your S-100 system.

SuperRam™ 16K is the latest in cost-efficient memory designs by George Morrow, designer of the best-selling ECONORAM* memories.

SuperRam™ 16K is configured as four independent 4K blocks, each separately addressable and write-protectable. Designed to meet the proposed IEEE Standard for the S-100 bus (see IEEE Computer, 5/78), all signals are fully buffered—including address and data lines. And Morrow's design uses just 11 chips to keep the board uncrowded and trouble-free.

SuperRam[™] 16K comes as an easily assembled kit, with solder mask and parts legend.

Ask for the SuperRam™ 16K memory kit at your local computer shop. Or if unavailable locally, call your BankAmericard/Visa or Master Charge order to 415-547-7548, 10-4 Pacific Time. Or send check or money order to Thinker Toys™, 1201 10th St., Berkeley, CA 94710. Add \$3 for handling; Cal. res. add tax.

*ECONORAM is a trademark of Godbout Electronics

A product of Morrow's Micro-Stuff for



Super Cheap 2708 Programmer

The advantages of programming your own 2708s are many. This easy to build programmer enables you to do the job—inexpensively.

s a KIM owner, I have spent many enjoyable hours running and programming my micro. But as I wrote more programs, I noticed that some of the subroutines were used over and over in different programs. I began looking for a suitable PROM on which to store them. The price and availability of the Intel 2708 PROM were attractive, so I looked for a programmer. Since there were no 2708 programmers compatible with KIM, I sat down, equipped with the Intel Memory Design Handbook, a prototyping board and some components, and made one.

Software

In theory, the 2708 PROM has a few simple requirements for entering data. A blank or erased 2708 has all bits in the high, or 1, state. Information is entered by selectively programming 0s into the desired locations. To enter data, the $\overline{\text{CS}}/\text{WE}$ pin is raised to + 12 volts to put the chip into the programming mode, the address of the word is selected and the data word is presented to the data pins.

After the data has settled (10⁻⁵ sec.), a programming pulse

of +26 volts at 20 mA is applied to the programming pin. The next address is then selected and the process continued until all addresses have been programmed. This is defined as one programming loop.

To determine the number of

SET I/O
PORT A,
PORT B,
CVCLE COUNT

CLEAR
COUNTERS,
LOAD DATA
POINTER WITH
LOW ADDRESS

LOAD DATA
POINTERS
PROCRAM
POINTERS
LOAD DATA
POINTERS
LOAD DATA
POINTERS
LOAD DATA
POINTERS
LOAD DATA
POINTERS
LOAD POINTERS
PROCRAM
POINTERS
LOAD POINTER

POINTERS
LOAD POINTER
PROCRAM
POINTERS
LOAD POINTER

NO
CYCLE
PYES

DECREMENT
CYCLE COUNT
LOAD PORT A,
POINTERS
PROCRAM
POINTERS
PROCRAM
POINTERS
PYES

DECREMENT
CYCLE COUNT
PYES

COMPLETE
PYES

DECREMENT
CYCLE COUNT
PYES

OF THE POINTERS
PYES

DECREMENT
CYCLE COUNT
PYES

DECREMENT
CYCLE COUNT
PYES

DECREMENT
CYCLE COUNT
PYES

PYES

DECREMENT
PYES

PYES

DECREMENT
PYES

PYES

DECREMENT
PYES

PYES

PYES

DECREMENT
PYES

P

Fig. 1. Flowchart of main program.

programming loops required to ensure valid data entry, use the following formula: N x t_{PW} greater than 100 msec, where N is the number of programming loops, t_{PW} is the programming pulse width and can be varied from 0.1 to 1.0 msec. For rapid programming, t_{PW} should approach one msec. This then requires 100 programming loops; the time required for complete

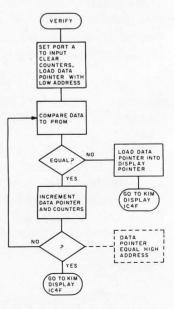


Fig. 2. Flowchart of verify program.

programming of 1K bytes is 1024 addresses times 1.0 msec times 100 programming loops, or about 103 seconds.

For KIM to perform the programming, it must control ten address lines, eight data lines, CS/WE and programming pins. To do this directly KIM would have to be able to latch 20 I/O lines, but since the addresses are stepped through sequentially and completely, counters can be used to provide the address. Then KIM can use two lines to control the counters and a third to sense the end of the programming loop.

Since KIM has 15 I/O lines, this is perfectly adequate. The counters selected were 74193s because their pin-out gives a simple PC board layout; but any binary counter could be used.

The I/O port is connected to the up-count, the clear and the output of the 11th counting stage. The program pulses the clear, then toggles the up-

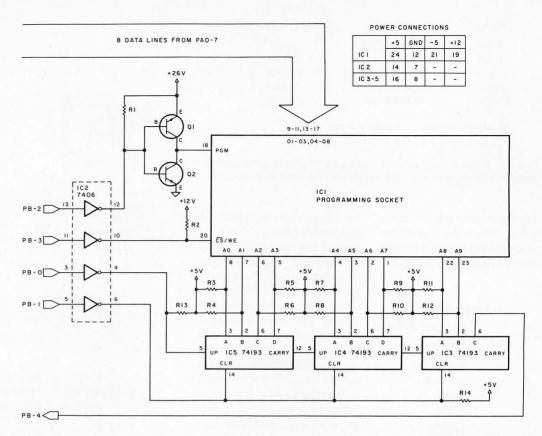


Fig. 3. Schematic diagram of programmer.

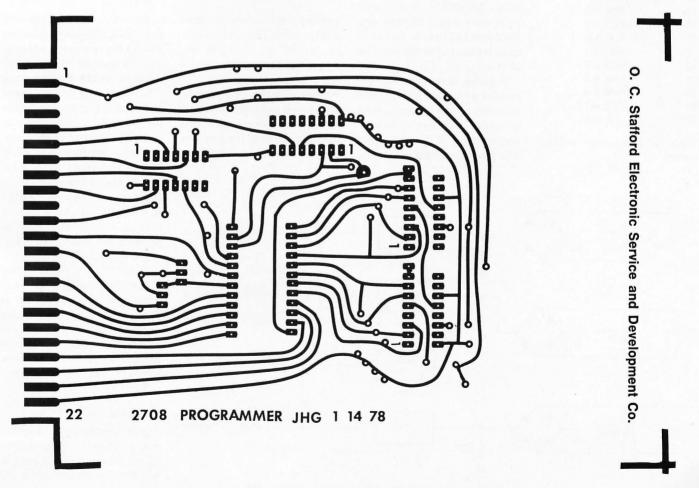


Fig. 4. Foil pattern for the PC board.

| Model | Power Rating | Time of Exposure |
|--------|-------------------------|------------------|
| S-68 | 12000uW/cm ² | 10 min. |
| S-52 | 12000uW/cm ² | 10 min. |
| UVS-54 | 5700uW/cm ² | 30 min. |
| R-52 | 13000uW/cm ² | 10 min. |
| UVS-11 | 5500uW/cm ² | 30 min. |

All exposures are at a distance of one inch with the filter removed.

Table 1. Exposure guide for Ultra-Violet Products lamp. (Ultra-Violet Products, Inc., 5114 Walnut Grove Ave., San Gabriel CA.)

count and tests the 11th stage output. When the end of the programming loop is detected, the counters are cleared and

| | Programmer |
|----|-----------------|
| 1 | GND and KIM A-1 |
| 2 | N.C. |
| 3 | N.C. |
| 4 | KIM A-13 |
| 5 | KIM A-9 |
| 6 | KIM A-10 |
| 7 | KIM A-12 |
| 8 | KIM A-11 |
| 9 | N.C. |
| 10 | -5 volts |
| 11 | + 12 volts |
| 12 | + 26 volts |
| 13 | N.C. |
| 14 | KIM A-8 |
| 15 | KIM A-7 |
| 16 | KIM A-6 |
| 17 | KIM A-5 |
| 18 | KIM A-2 |
| 19 | KIM A-3 |
| 20 | KIM A-4 |
| 21 | KIM A-14 |
| 22 | +5 volts |

Table 2. Connector assignments.

the cycle register, 00EE, is decremented (Fig. 1 is a flowchart of this main program).

To control the CS/WE and programming pins, the lines are buffered with a 7406 (hex inverter with 30 volt open collectors). The programming pin requires a source of 26 volts at 20 mA and a sink of 1 to 2 mA, so push-pull transistors were used to control the actual input to the programming pin.

The program (listed in Program A) uses 00E7 through 00EE as address and counting registers on page zero and it occupies an additional 184 bytes of memory—either RAM or ROM. As written, it occupies page zero, which permits any RAM over 0200 as the source of data. It exits to the KIM monitor at 1C4F.

The body of the program consists of: an initialization routine that sets up the I/O ports, data pointer and cycle count; presentation of the data word and programming pulse; incre-

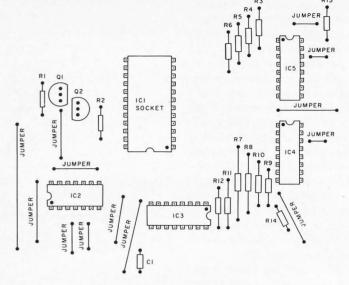


Fig. 5. Component placement.

| IC1 | 2708 socket |
|---------|--------------------------|
| IC2 | 7406 hex inverter (O.C.) |
| IC3-IC5 | 74193 binary counter |
| R1-R14 | 4.7k Ohm 1/4W resistor |
| C1 | 0.1 uF capacitor |
| Q1 | 2N222 or 2N3904 |
| Q2 | 2N3906 |

Table 3. Parts list.

menting the counters and data pointer; testing for last data entry; testing for complete programming loop; and testing for end of programming.

When programming is completed, the routine jumps to a verify loop that compares the PROM contents to the data (see flowchart in Fig. 2). When the

number of data words is less than 1024, the program enters FF into the remaining addresses. This permits additional entries to be made at a later date.

During verification, if an error is detected, the program jumps to the KIM monitor and displays the address of the error. Complete programming takes just under two minutes. Additional data can be entered into addresses containing FF, but all previous data must also be entered. All addresses must be programmed during each programming cycle.

The 2708 PROM can be erased by exposure to ultraviolet light at a wavelength of 2537 Å. The recommended dosage is 10 Watt-seconds per square centimeter. This can be determined by a UV meter or by following the exposures given in Table 1.

Hardware

A schematic of the programmer is shown in Fig. 3. The layout shown in Figs. 4 and 5 is a minimum hardware layout using a single-sided PC board

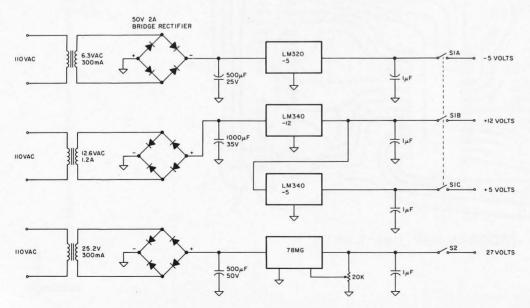


Fig. 6. Power-supply diagram. Adjust the output of the 78MG to give 26 volts after the drop across Q1.

with jumpers. It connects to the application connector supplied with KIM and the power supply. KIM's peripheral port A supplies the data to be entered; port B is used to control the counters and programming lines.

PB-0 is used to increment the counters, while PB-1 clears them. PB-2 controls the programming pulse and PB-3 controls CS/WE. PB-4 is used to sense the completion of the programming loop by detecting a high on the C output of the high-order 74193. PB-5 and PB-7 are not used. The interface connections are shown in Table 2. Pull-up resistors are used on the TTL outputs to ensure that the logic levels required by the 2708 inputs (3.0 volts, VIH) are met.

The programmer requires four voltages, in addition to the 5 volt supply for KIM; the 2708 requires a -5 volt supply at 45 mA, +12 volts at 65 mA and +26 volts at 20 mA. The diagram in Fig. 6 illustrates a suitable supply. The power for the programmer should be controlled separately so the programmer can be turned off when the PROM is being inserted or removed.

Programming Procedure

- 1. Turn off all power. Then plug the programming board into the application connector on the KIM. Insert the PROM to be programmed into the 24-pin programming socket. Check the orientation to make sure that the number one pin is in the proper alignment.
- 2. Turn on the power to KIM, enter the PROM programming routine and the appropriate data. Make sure that the programming routine and the data have been entered correctly.
- 3. Enter the low address of the data into 00EA, 00EB, and the high address into 00EC, 00ED. The program will enter the cycle count into 00EE and use 00E8, 00E9 as the data-byte pointer. (00E7 is used as a false address during the program, so the contents will be lost.)
- 4. Turn on power to the programmer and examine the contents of peripheral port A

(1700). With a blank PROM in the programming socket the data byte should be FF. Go to 0000 and hit GO. The programming will take just under two minutes. When the programming finishes the display will be 0000-A0.

If there was an error detected during the verification routine, the display will light up with the address of the error. To verify

A kit for building Jim's EPROM Programmer is available from: O.C. Stafford Electronic Service & Development Co. 427 South Benbow Road Greensboro NC 27401

> Drilled Undrilled

> > \$5.80

PC Board (Part number KB/JHG 11478) Parts kit (no board) Negative or positive

\$ 7.50 43.00

3.50

Add \$1 for shipping.

Zero page registers:

OOEE cycle count OOEC, OOED high data address: HDAL, HDAH OOEA, OOEB low data address: LDAL, LDAH OOE8, OOE9 data pointer: DPL, DPH OOE7 Dummy counting address

0089

0080

0080 nn FD

60

DELAY

LDX

DEX

BNF

RTS

F8

C.1

| | Program: | | | | | | | | |
|--|--|--|--|--------------|---|--|--------------------|--|---|
| 0000 0002 0004 0006 0008 000E 0010 0013 0015 0018 001B 001D 0023 | A0 A9 85 A9 8D A9 8D A9 8D 20 B1 20 20 90 | 00 64 EE FF 02 01 EF 03 F5 02 6E E8 77 90 F6 F4 | 17 17 17 17 17 00 00 | A1 A2 | LDY LDA STA LDA STA LDA STA LDA STA LDA(Y) JSR LDA(Y) JSR BCC BEQ | #00 #64 EE #FF DRB DDRA #EF DDRB #F5 DRB MOV Data PRGM INCA A2 A2 | | | Clear Y Load cycle count and store OOEE. Set I/O Port B reg. to high state and I/O port A to output. Set I/O Port B to output except pin PB-4. Clear programming counters. Go Sub MOV. load data using data pointer. Go Sub PRGM. Go Sub INCA. If less than or equal to high Data Pointer continue entering data. |
| 0027 0029 002C 002E 0030 0032 0035 0037 003A 003D 003F 0042 0044 0047 | A9 2C F0 C6 D0 4C A9 20 4C A9 8D A9 8D 20 AD D1 | 10 02 07 EE E1 3D FF 77 27 00 01 FD 02 6E 00 E8 | 17 00 00 00 17 17 00 17 | A3 A4 VRFY | LDA BIT BEQ DEC BNE JMP LDA JSR JMP LDA STA LDA STA LDA CMP(Y) | #10 DRA A4 EE A1 VRFY #FF PRGM A3 #00 DDRA #FD DRA MOV DRA data | | | Bit test for end of cycle. if done go to A4. decrement cycle count and if not zero go to A1. Go to VRFY. Program FF into remainder of PROM. Go to end of cycle test. Set I/O Port A as input. Clear programming counters with cs low. Go Sub MOV. Load data word from PROM. compare to data word in RAM. |
| 004F 0051 0053 0056 005E 0060 0063 0065 0067 0069 | DO A9 8D CE FO 4C A5 85 A5 4C | 12 FF 02 02 EA 4F E8 FA E9 FB 4F | 17 17 10 | B2 | BNE LDA STA DEC BEG JMP LDA STA LDA STA JMP | B2 #FF DRA DRA B1 KIM DPL KIM DPH KIM KIM | pointer pointer | | On error go to B2. Toggle the programming counter. go to B1. Return to KIM program on error set KIM pointer to error address and return to KIM program |
| | | | ines: | | | | | | |
| 006E 0070 0072 0074 0076 | A5 A5 A5 85 60 | EA EB E9 | | MOV | LDA STA LDA STA RTS | LDAL DPL LDAH DPH | | | Move low data address into the data pointer and return. |
| 0077 007A 007C 007E 0081 0084 | 8D E6 A9 8D 20 A9 8D | 00 E7 03 02 8A 06 02 | 17 17 00 17 | PRGM | STA INC LDA STA JSR LDA STA | DRA Dummy #03 DRB DELAY #06 DRB | Add. | | Output data to PROM. Delay for data setup. Raise PGM pin to 26 volts. Go Sub DELAY. PGM pin returned to GND and counter incremented. |

Return.

and

return

Delay for .99 msec. (992 clock cycles)

| 0090 0092 0094 0096 0098 009A 009C 009E 00A0 | E6 D0 E6 A5 C5 90 A5 C5 | E8 02 E9 E9 ED 04 E8 EC | | INCA D1 D2 | INC BNE INC LDA CMP BCC LDA CMP RTS | DPL D1 DPH DPH HDAH D2 DPL HDAL | | Increment data pointer and compare to High Data address and return |
|--|--|--|----------------|------------|--|--|-----------------------------|---|
| | PE | EK r | outir | ne: | | | | |
| 00A1 00A3 00A6 00A8 00AB 00AE 00B1 00B2 00B4 00B6 | A9 8D A9 8D CE A9 85 A9 | 00 01 FF 02 02 00 FA 17 FB 4F | 17 17 17 | PEEK | LDA STA LDA STA DEC LDA STA LDA STA JMP | #00 DDRA #FF DRB DRB #00 KIM #17 KIM | pointer low pointer high | Set I/O Port A as an input. then toggle the programming counters. Set KIM pointer to I/O Port A and jump to KIM program to display PROM data. |

Program A. The programming program. The PEEK routine is used by entering A1 into 17FA and 00 into 17FB. Go to address 1703, hit the data key and enter C,F,F. This will clear the programming counters. Then go to address 1700. The data word displayed should be the first data byte in the PROM. By hitting the stop key, the PROM address can be incremented, and the data displayed will be the contents of the PROM.

the error load A1 into 17FA and 00 into 17FB. Then go to 1700.

The data should be the first byte in the PROM. To increment the PROM address, hit STOP. The data should now be the second byte in the PROM. Step the PROM to the location of the error.

If the error is a high bit in the PROM (e.g., a 1 in place of a 0), the programming can be attempted again. If it is a 0 in place of a 1, turn off the power and erase the PROM. Then verify that the erasure has returned the problem bit to a 1 and repeat the programming. Always be sure to turn off the power before inserting or removing the PROM.

THE COMPUTER CORNER C28

White Plains Mall, Upper Level 200 Hamilton Ave. White Plains NY 10601 Phone: (914) WH9-DATA

Near Bronx River Parkway & Cross Westchester Expressway. Plenty of parking.

"The S100 Bus stops at White Plains" with one of the largest collections of boards compatible with the Altair Bus (also IMSAI) in the greater NY area.

You've read about the Sol-20, now come up and see it. We carry Processor Tech, Polymorphic, IMSAI, North Star, TDL, Blast Master and Pickles and Trout.

GOOD PRICE AND SERVICE 10-6 Mon.-Sat. Thurs. till 9 C-28

THE COMPUTER CORNER



Some common, some favorite, some new Most will run on 4K

Mix: 30 Games (inc. S_T_)

25 Business & finance

15 Home use 15 Graphics 15 Education

100 Keyboardless beauties!!

Medium: Cassettes, ready to load

Price: All for \$49.50 + \$2.00 p & h +

4% tax GA res.

Bonus: Tiny PILOT if ordered before

Sept. 1, 1978

The Bottom Shelf, Inc.
P.O. Box 49104

Atlanta, Georgia 30359

Superior Quality

Audio Cassettes

For Tarbell, DGS, KC and other systems requiring excellence.

- Baud rates in excess of 1200
- Super high density Low noise
- High frequency response
- Signal to noise ratio 54 DB
 Tensilized polyester base .69 mil
- Tape mfg. by Agfa-Gevaert
- Plastic case included
- 30 minute tapes

Can you really afford anything less?

3/\$5.50 10/\$15.50 25/\$35.00

OEM prices available on request

Pitts Enterprises 1516K Bowen Street Longmont, CO 80501 **P24**

postage paid

ph.303-772-2489

16K

\$-100 STATIC RAM \$ 319

- FULLY STATIC (Not Pseudo Static)
- PHANTOM DISABLE (A16)
- MWRT OR PWR
- FULLY BUFFERED
- 128-2102L1PC'S
- 400NS GUARANTEED (250NS TYP.)
- ASSEMBLED/BURNT-IN
- 90-DAY GUARANTEE

Also:

8K STATIC RAM 2102L1PC ⁵155 ⁵1.40

Calif. Residents add 6%. • Master Charge & Visa welcome



P.O. BOX 17296 IRVINE, CA. 92713

ANNOUNCING THE BYTE BOARD A Better EPROM Board

Better because . . .

etter because ...

It holds 16 2708s ● Each 2708 is individually addressable on any 1K boundary ● Unused EPROM do not take up memory space ● Power On Jump available for front panel-less operation ● S-100 bus compatible ● Comes with a 20 + page assembly & user's manual ● It's gold fingered, solder masked, and silk screened, and comes complete with sockets and all parts except EPROMs.

Compare. You can pay more, but you can't buy a better, more versatile EPROM board.

\$69 kit \$99 assembled Want EPROMs? We've got 2708s for \$10 ea, 8/\$76, or 16/\$145. Prime, 450ns of course. Need an EPROM eraser? Ours is \$30 2704/2708/2716 programming? Contact us. Immediate delivery from stock for M.O. or COD. 20% deposit on COD. Calif. res. add 6%. Dealer Inquires invited.

Data Vector Cotton P.O. Box 3141
Burbank, CA 91504
213-842-2866
D32

A NEW SOUND A NEW MUSIC BITS.AND.BYTES*(BACH,BINARY + BOOLEAN)

12 INCH STEREO RECORD 25 MINUTES PLAYING TIME

BACH TRUESCALES JOPLIN

JOHN PRATT 3-VOICE COMPUTER-CONTROLLED MUSIC SYNTHESIZER 25 SCALES, 25 PARAMETERS PER NOTE PER VOICE INSTANTANEOUS VOICE, TEMPO AND SCALE CHANGES HARDWARE/SOFTWARE ABSTRACT ON BACK OF RECORD COVER

Features one of the more difficult of the Bach Three-Part Inventions for the piano played in true scales, also played on vibs & 3 guitars. "Entry of the Gladiators" is used to demonstrate accelerando and rallentando with many voice chances.

Music consists of the above two full-length selections; with the remaining 11 numbers being shorter selections using various voicings and tempos, which were created to debug subroutines and as exploratory music to de

The present-day even-tempered scale and 24 true scales are defined by software, although not all of the true scales are used in this record.



THE AVANT-GARDE MUSIC OF THE FUTURE DO IT IN A COMPUTER, TO MUSIC IN NATURAL SCALES

dealers desired

\$6.00 postpaid (ck/M.O.) (Calif res include 6% sales tax)




modem / 'mo • dəm / [**mod**ulator + **dem**odulator] n - s: a device for transmission of digital information via an analog channel such as a telephone circuit.

USES •

• Intelligent Terminal • Timesharing • Distributed Processing • Automatic Data Collection

• Access to Remote Data Base • Line Concentrator • Telecommuting

• Electronic Mail • Remote Access to Process Control Systems

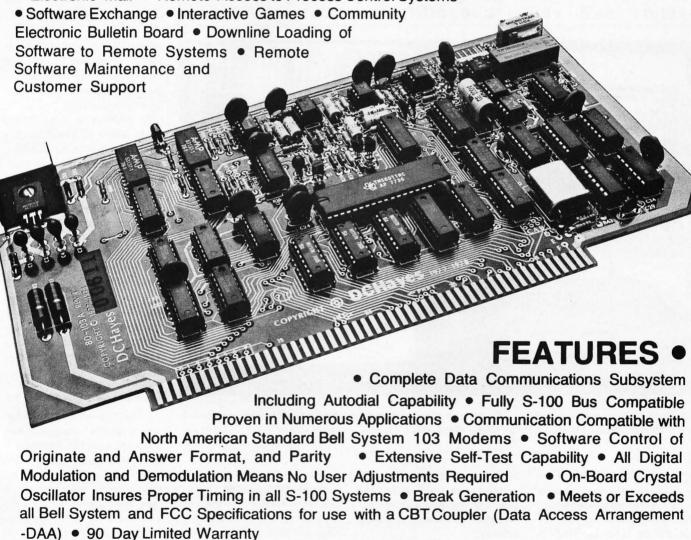


D.C. Hayes Associates, Inc. H20

16 PERIMETER PARK DR. SUITE 101 P.O. BOX 9884 ATLANTA, GEORGIA, 30319 (404) 455-7663

DISTRIBUTED IN CANADA BY TRINTRONICS, LTD., TORONTO

Something Extra in Mass Storage

The speed and capacity of a dual phi-deck system should be considered when you decide on the mass storage for many serious applications. Meca's operating system and voice capability could constitute a deciding factor.

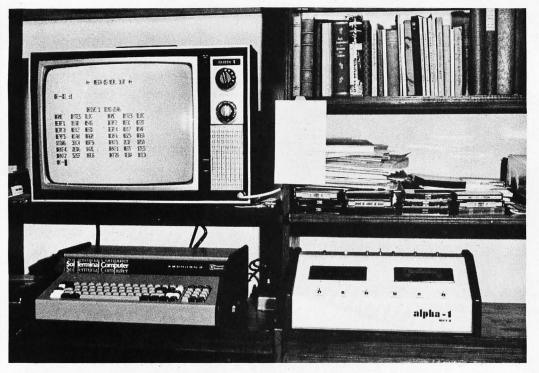

The author's system consisting of a SOL-20 with 32K of memory, the Alpha-1/2 with dual tape drives and a 19-inch Zenith TV, modified for direct video input.

rinding a highly reliable, efficient and low-cost massstorage system has been a high priority with me since I got my SOL-20 up and running in March 1977. Let me define that last statement. By highly reliable I mean the ability to save a program with the assurance that you will be able to recover it. Even double saves on audio tape with the CUTS tape interface is not always a guarantee of program recovery. Speaking with owners of other similar systems, like the Tarbell tape interface, corroborates my observation concerning these devices.

Even though 1.2 kilobaud (or 150 characters per second) seems fast compared to typing or to some of the audio tape interfaces used by many microcomputer users, it is definitely too slow for anything but pure, and limited, hobby applications. A single-spaced typewrit-

ten page (8.5×11 inch format) contains 2700 to 3000 characters. This means that the simple transfer of one typewritten page will take between 18 and 20 seconds, which I consider unacceptably long.

Finally, from a cost point of view, the audio recorder storage is hard to beat, particularly if you already have the tape recorder. However, as stated above, for small business application an audio recorder is in-

adequate. Floppy disks appear to be the obvious answer, but that solution has drawbacks the biggest of which (to most of us, anyway) is cost.

At present a dual floppy costs \$2000 to \$2500; a little more than half that much for a single. The micro or minifloppies have an almost 2 to 1 cost advantage over that, but only 1/3 the capacity. I'll get back to some more comparisons later.

Given the above, the ideal solution would appear to be some type of tape system that would allow the use of easily and inexpensively obtained audio tapes, but with datastorage capability and reliability now most commonly associated with floppy-disk storage.

The Rainbow's End

I checked with manufacturers of digital tape-recording units and systems. Some quoted delivery dates four months into the future; others told me how some of their customers were developing software for their systems, which they (the manufacturers) hoped to be able to offer soon; others not only let you worry about your own software, but even expected you to do some hardware modifications.

Frankly, I was seriously considering home brewing something, even though I had seen some efforts along that direc-

tion by other micro owners that had left me less than enthusiastic, considering the amount of effort it had involved for the individuals and the total result achieved.

I had already made quite a few phone calls in collecting the information I considered necessary to make an intelligent decision when I finally contacted Meca, the manufacturers of the Alpha-1. Now, thinking back about why I waited to check with Meca, I have to state that the picture Meca used for their advertisements for the Alpha-1 does not do justice to the unit, not to mention its capabilities. I placed the order for the Meca Alpha-1/2 (the second number stands for the number of drives) on Thursday, and received the kit by UPS the following Monday.

The assembly of the unit was straightforward; the assembly of the drive cards, one of which works with and is mounted on each drive, gave me the most problem. Not only are the drive cards not soldermasked, but also one of the drive cards had not been etched to Meca's specifications by the PC board manufacturer. Since I assembled my unit, Meca has started to offer their kits with the drive cards assembled and tested for an extra \$20 per card. For my money, particularly knowing how much work went into my drive cards, I would gladly pay that amount if I had to do it all over again.

Assembling the Meca Alpha-1

The total assembly time came to just over 30 hours (including the Meca drive cards, which represented 8 to 10 hours). However, there were some minor difficulties I would have run into even with the assembled cards. Most of my problems occurred with the drive card installed on drive 1, which has one mounting screw that is most inconveniently blocked by the power transformer. After most of the problems had been fixed, I finally switched it to the 0 drive.

The S-100 bus interface card, fully soldermasked, could only have been improved by silk-

screening the information in white, rather than black, for better legibility. One of the 7805 voltage regulators, lacking any printed information on the body, turned out to be a 2.5 V regulator instead, which caused some rather interesting voltage readings until the problem was corrected. In getting my system ready to run, I called Meca and found them both eager to help and friendly at all times. They urged me several times to return the poorly etched drive card to them for repair or replacement.


Meca, who advertise that their Alpha-1 mass-storage system is ready to use with Mits, Imsai, Poly 88, Z-2 and ZPU, finished the software for the SOL-20 with SOLOS just as I was completing my assembly, so there was no delay in my being able to bring the system up (and which, in all probability, made me the first SOL owner to operate with the Meca).

Included in the price of the unit is the relocatable Meca cassette operating system (MCOS), complete with an assembler, an editor, debugging program, a directory reconstruction program and a patch to allow the MCOS to operate and cooperate with the 4.0 Altair extended as well as with one of their 8K versions of BASIC. (Meca has since become distributor for the Microsoft 4.4 extended and 8K versions of BASIC, which are the same as Altair BASIC, and will sell them to their customers for \$150 and \$75, respectively.)

The Software

The following two weeks comprised a fascinating voyage of discovery. Never having had an assembler to play ... excuse me, to work with before, I loaded some of the source codes Meca supplies with their software and let the assembler assemble it on screen. The assembler is a modified version of the one supplied free of charge by Processor Technology. It is patched to display 15 lines on the screen at a time, with 'Return' bringing successive 15-line pages on screen.

When using the Meca Editor,

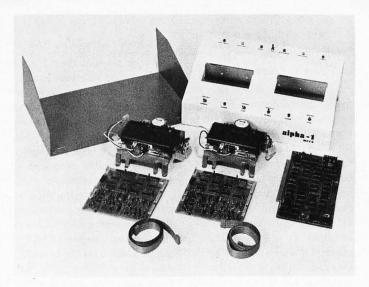

The Alpha-1 shown after assembly of the drive cards, the interface card and the LED and toggle-switch harness installed in the cabinet top. (Photo by Milt Hyman)

first load it into memory. When you then load in a program to be edited, the MCOS keeps track of where that program was loaded, and upon giving the "edit" command, the editor will automatically go to the start of the program to be edited.

The editor allows you to delete one or any number of lines simply by quoting the beginning and ending line numbers of the block to be deleted. There is an insert mode, a replace mode and an add mode. When adding lines, the editor will number consecutive lines automatically.

One problem I ran into when experimenting with the editor and assembler was (and I am certain that this is applicable to any other editor-assembler combination) that when I put my own test programs together and attempted to assemble them they crashed every time. It took me a day to find out that the assembler, which requires an end statement to know when it has reached the end of the assembly-language source listing, wanted that end statement, not in the label field, where I had innocently placed it, but in the op-code field.

I make specific mention of this here because I just got a call from another computer owner who bought an Alpha-1 on my recommendation and was stumped by the identical problem. I am sure that most computer professionals would get a chuckle out of such an episode; however, to me, it typifies the kind of frustration the novice computer owner/operator can fall victim to. Simultaneously, it is the type of problem a professional couldn't solve because more often than not he takes for granted that anyone involved with computers possesses such "elementary" information.

The debugging program will allow you to initiate a hex dump from any place in memory. It also allows you to enter new data directly in hex, and, in one of its phases, will automatically display the contents of the CPU's registers.

As you lose interest in certain programs within a tape, you may delete them from the directory. On its way to the beginning of programs requested from the drive, the unit will skip over these vacant spots at up to 120 inches per second (ips). It is possible, however, to recover any deleted files via the Directory Reconstruction program. In that mode the unit will go through the tape at read speed (5 ips), displaying the name of the program, the number of bytes in it, the starting address on the tape, the starting address of the program as recorded when the program was first written (sometimes these two addresses may be different by

several counts), and announce if it happens to be a duplicate file name.

Still More to Come

As I was still attempting to take in all the goodies that had been supplied with the Alpha-1, I was informed by Meca that they had just completed an updated and improved MCOS, designated version 3.0, which they would initially offer to owners of Alpha-1 and individuals buying units for \$10 (\$15, if acquired at a later date). I couldn't imagine how, or what, they could have improved on a system which at this point had already by far surpassed what I had expected. But they did it!

Previously, after loading MCOS you had to rewind the tape, read the directory and list the directory to determine the contents of a tape. Version 3 automatically mounts the home drive, which simplifies start-up. Version 3 defaults to the last drive used when not specified. Everything has been made even more forgiving than it was: the equipment virtually does all the housekeeping for you. When you really think about it, equipment like this really should. After all, why do you have a computer if you have to do all its thinking?

The Alpha-1 with Altair BASIC

If your present BASIC does not let you do whatever you can think of (with a computer!), and make it easy to do, you owe it to yourself to look at the Altair BASIC; and I mean before you spend a lot of time writing potentially valuable programs in something less versatile.

What has made the Alpha-1 valuable to me over and beyond all I have mentioned before is that the new version 3.0 MCOS can be grafted on top of BASIC (Altair) in a fashion that lets BASIC look through it at all the free available memory. This means not only that you have all of the BASIC functions at your beck and call, with program CSAVE and CLOAD working directly with the Alpha-1, as do the array CSAVE and CLOAD features; you can also use the five-character name acceptable to the Alpha-1 as a reference and file name (as opposed to the single character the BASIC requires). You are further able, either by direct command or in a BASIC program, to use all of the pure Meca Alpha-1 commands by placing them after a REM*.

Furthermore, the new MCOS

allows overlays of existing programs so that you can make desired changes to a program and then save the altered program into the same slot that was previously occupied by the original version. If the altered program is less than one kilobyte larger, it will be stored in the same slot; otherwise, the Alpha-1 will automatically add the altered file at the end of all the existing files and delete the old file. Thus, you can call in data, update it, change it, then write it back in place . . . similar to a disk operation.

Some Alpha-1to-Disk Comparisons

Just one week ago I was informed by the local Byte Shop in San Rafael CA that a 300K byte disk (a Processor Tech Helios II) can be copied in about six minutes. Frankly, I was amazed. I had always been under the impression that it would take a half to one minute, at most!

Now, comparing that to the Alpha-1, I calculated the following: The Alpha-1 has a data transfer rate (read or write) of 781 plus a fraction bytes per second (6250 baud). In the copying mode, it reads a file into memory, writes the file, re-

winds and reads the file back, checking for errors.

When the read-back check is completed, the unit is ready to load the next file to be copied. In effect, for each file copied, the Alpha-1 makes three passes-two read and one write. Since this reduces its effective copying speed to a "mere" 260 + bytes per second (still think your audio cassette is fast?), it would take 1000 seconds to copy 0.26 megabytes. Allowing for some extra time for the search runs, you can copy the same amount of information it takes the disk six minutes to complete, in 18 to 20 minutes with the Alpha-1. Therefore, the disk is three times as fast as the Alpha-1! (Just remember, it also costs three times as much.)

Now, I don't want to convey a sour-grapes attitude . . . if you need the speed, I am quite willing to concede that a disk is, presently, a viable, if expensive, solution. But let's get back to the Alpha-1. Here, with a dual drive unit you get over 50 percent more data on line than with the full-size dual floppy. And if data on line becomes critical, as when you want to run a complex sorting system (possibly with the computer put to the task overnight), you might even prefer 2 megabytes on line. You could manage this with a four-drive Alpha-1/4 for about two thirds the money you would otherwise pay for a dualdisk drive, which only offers one third of the Alpha-1/4 capacity (on line).

Another way to increase online storage without buying a second Alpha-1/2 (dual drive) is to use 90-minute cassettes, although this would increase worst-case access time by 50 percent. With greater difficulties (i.e., with some hardware changes), you could conceivably use the second track, which is reserved for an analog channel (sound), as an additional digital information medium.

Since you operate on larger blocks of data with an Alpha-1 than with a disk system, your requirements for RAM memory will be higher. Of course, with



The fully-assembled Alpha-1/2 (see text) with optional wood side panels.

(Photo by Milt Hyman)

memory prices dropping so rapidly this becomes desirable since RAM is the heart of your

Now let's look at some other important differences. The very speed of the disk can bring about utter disaster in the event of a head crash. I understand that if that situation occurs, you can lose all the information stored on your disk in the blink of an eye. With the wrong type of glitch fouling up your tape-system equipment, you might lose some data if the glitch turns both the tape transport and the write mode on simultaneously and puts the transport into play mode.

The mini or microfloppies have been hailed as a great boon to the microcomputer owner because they go for about half the price of a fullsize floppy. Of course, on-line storage is cut to one-third of a full-size floppy. If the program you want to run has less than 90K bytes data requirements, you better your access speed (for 90K only) from about six seconds for the tape drive to half a second on the microfloppy. But if you need as much as 10K bytes more than you can put on the disk, you're cooked.


Some Potential **Major Side Benefits**

The Meca Alpha-1 was designed with some important performance goals. For reliability the Alpha-1 uses the industry standard phase encoding method and uses a professional type phase-locked loop to smoothly track data over a 2:1 speed range. This allows tapes made on one Alpha-1 to be totally compatible for use on any other Alpha-1, without adjustments of any type. It further means that although you may have an Imsai or Mits and I have a SOL, the programs we write or develop, using Altair BASIC, can be exchanged between us directly and will run without changes on each other's machine, since the different I/O routines of our respective equipment are effectively taken care of by our own versions of BASIC.

It also makes an intercomputer Alpha-1 users group feasible. As a member, you could benefit from efforts expended by individuals in writing programs on computers other than the type you own, yet with whom you'll be able to exchange software as simply as exchanging tapes. Call it another breach in the software bottleneck.

In Conclusion

It is my understanding that Meca will have an excellent text editor working with the Alpha-1 soon, even though, since this is a royalty arrangement with the

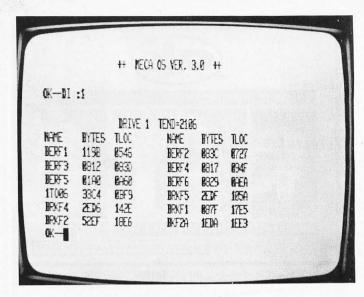

Screen display of a 12-file directory. If the directory is bigger than 28 files (50 or more are possible), the display stops, waits for a C/R to display the next page.

author of the text editor, you will have buy this piece of software. Other than that, Meca appears to be working on a CCD memory buffer between the Alpha-1 and the computer to narrow the gap to the disks in those areas where the disk does have an edge.

At this point, you probably think that I am sold on the Alpha-1. Well, you are right-1 am. And so, incidentally, are a number of individuals who purchased their Alpha-1s based on my recommendation; the software exchange has already started.

The thought that I may soon be able to exchange software with you, who are reading this, adds to my feeling of satisfaction at having acquired this versatile unit.

Finally, if you think that this might be for you, but even \$695 (plus tax and shipping) is a little steep for you, Meca also sells the Alpha-1 as a single-drive unit (under \$500). This robs you of the advantages of the double drive, such as automatic driveto-drive copying, but it will still be at least a couple of orders of magnitude better than the ol' audio cassette.

KIM-1 ™ ACCESSORIES FROM MTU





VISIBLE MEMORY **Graphic Display**

- 320 wide 200 high bit mapped graphics
- 8K byte onboard refresh memory • Use as display, memory expansion, or both!
- Graphics and text display software available
- · Direct KIM interface, no external logic needed
- KIM memory expansion signals provided
 Can use with other 6502/6800 systems @ 1.0MHz
- No wait states, no snow, and no processor
- overhead to refresh display

 75 ohm standard video 1.2V P-P (non-interlace)

 Low power: +8 @ .25A, +16 @ .25A unregulated
- Assembled & tested \$289.00, bare board \$40.00
- Graphics subroutine pack & demo program





CARD FILE WITH MOTHERBOARD

- Expansion boards fit under the KIM
- KIM and 4 expansion boards require no more
- table space than the KIM alone Only the KIM is exposed
- All expansion boards are protected
- KIM and expansion boards rigidly supported
- Unbuffered KIM bus is well shielded
- slots and backplane are preassembled
- KIM application connector also prewired
- Power input via 5 point terminal strip
- Chromated aluminum & glass epoxy con-
- Assembled and tested \$68.00



POWER SUPPLY K-1000

- Meets KIM specifications
- Extra power for accessories
- Black bakelite enclosed
- 5 point terminal strip Fully protected
- Guaranteed ratings 110-125 VAC line voltage
- +5 volts-1.2 amps + 12 volts-100MA
- + 8 volts—750MA unreg.
- + 16 volts—250MA unreg Assembled, tested \$30.00



8 BIT AUDIO SYSTEM K-1002

- 3.5 kHz LP filter, 6 pole
- Audio power amplifier, 100MW
- · Connects to 8 bit port Fantastic music software (KIM)
- 4 Voice harmony Fourier derived waveforms Different wave per voice
- Music compiler & interpreter Speech synthesis possible
- Assembled & tested \$35.00
- Software pack/cassette \$13.00

Micro Technology Unlimited


P.O. Box 4596 29 Mead Street **Manchester NH** 03108

M44



DIP/IC INSERTION TOOL WITH PIN STRAIGHTENER










14-16 Pin Dip IC Inserter | INS-1416 | \$3.49

DIP/IC EXTRACTOR TOOL



The EX-1 Extractor is ideally suited for hobbyist or lab engineer. Featuring one piece spring steel con-struction. It will extract all LSI, MSI and SSI devices of from 8 to 24 pins.

| Extractor Tool | EX-1 | \$1.49 |
|----------------|------|--------|

P.C. BOARD

The 4 x 4.5 x 1/16 inch board is made of glass coated EPOXY Laminate and features solder coated 1 oz. copper pads, The board has provision for a 22/44 two sided edge connector, with contacts on standard .156 spacing. Edge contacts are non-dedicated for maximum flexibility.




spacing. Edge contacts are non-dedicated for maximum flexibility. The board contains a matrix of .040 in. diameter holes on .100 inch centers. The component side contains 76 two-hole pads that can accommodate any DIP size from 640 pins, as well as discrete components. Typical density is 18 of 14-Pin or 16-Pin DIP's. Components may be soldered directly to the board or intermediate sockets may be used for soldering or wire-wrapping.

Two independent bus systems are provided for voltage and ground on both sides of the board. In addition, the component side contains 14 individual busses running the full length of the board for complete wirring flexibility. These busses enable access from edge contacts to distant components. These busses can also serve to augment the voltage or ground busses, and may be cut to length for particular applications.

| | Hobby | Board | |
|--|-------|-------|--|
|--|-------|-------|--|

H-PCB-1 \$4.99

PC CARD GUIDES



TR-I consists of 2 guides precision molded with unique spring finger action that dampens shock and vibration, yet permits smooth insertion or extraction. Guides accommodate any card thickness from .040- 100 inches

QUANTITY - ONE PAIR (2 pcs.)

Card Guides TR-1 \$1.89

QUANTITY - ONE SET (4 pcs.)

PC CARD GUIDES & BRACKETS

TRS-2 kit includes 2 TR-1 guides plus 2 mounting brackets. Support brackets feature unique stabilizing post that permits secure mounting with only 1 screw.

| | | - |
|---|----------|----|
| 0 | & Bracke | 4. |


TRS-2 \$3.79

QUANTITY - ONE SET (4 pcs.)

PC EDGE CONNECTOR

44 Pin, dual read out, .156" (3,96 mm) Contact Spacing, .025" (0,63 mm) square wire-wrapping pins.

| П | P.C., Edge Connector | CON-1 | \$3.49 |
|---|----------------------|-------|--------|
| | | | |



P.C.B. TERMINAL STRIPS

The TS strips provide positive screw activated clamping action, accommodate wire sizes 14-30 AWG (1, 8-0, 25mm). Pins are solder plated copper. .042 inch (1mm) disputes p. 200 inch (5mm) centers.

| diameter, on .200 inch (5m | m) centers. | |
|----------------------------|-------------|--------|
| 4-Pole | TS- 4 | \$1.39 |
| 8-Pole | TS- 8 | \$1.89 |
| 12-Pole | TS-12 | \$2.59 |

DIP SOCKET




Dual-in-line package, 3 level wirewrapping, phosphor bronze contact, gold plated pins .025 (0,63mm) sq., .100 (2,54mm) center spacing.

| 14 Pin Dip Socket | 14 Dip | \$0.79 |
|-------------------|--------|--------|
| 16 Pin Dip Socket | 16 Dip | \$0.89 |

RIBBON CABLE ASSEMBLY SINGLE ENDED


| With 14 Pin Dip Plug 24" Long (609mm) | SE14-24 | \$3.55 |
|--|---------|--------|
| With 16 Pin Dip Plug 24" Long (609mm) | SE16-24 | \$3.75 |



DIP PLUG WITH COVER FOR USE WITH RIBBON CABLE


| 14 Pin Plug & Cover | 14-PLG | \$1.45 |
|---------------------|--------|--------|
| 16 Pin Plug & Cover | 16-PLG | \$1.59 |

QUANTITY: 2 PLUGS, 2 COVERS



RIBBON CABLE ASSEMBLY DOUBLE ENDED

| With 14 Pin Dip Plug - 2" Long | | |
|--------------------------------|---------|--------|
| With 14 Pin Dip Plug - 4" Long | DE 14-4 | \$3.85 |
| With 14 Pin Dip Plug -8" Long | DE 14-8 | \$3.95 |
| With 16 Pin Dip Plug -2" Long | | |
| With 16 Pin Dip Plug -4" Long | | |
| With 16 Pin Dip Plug -8" Long | DE 16-8 | \$4.35 |




TERMINALS

- .025 (0,63mm) Square Post
- 3 Level Wire-Wrapping
- Gold Plated

| Slotted Terminal | WWT-1 | \$2.98 |
|--------------------------|-------|--------|
| Single Sided Terminal | WWT-2 | \$2.98 |
| IC Socket Terminal | WWT-3 | \$3.98 |
| Double Sided Terminal | WWT-4 | \$1.98 |

25 PER PACKAGE



TERMINAL INSERTING TOOL

For inserting WWT-1, WWT-2, WWT-3. and WWT-4 Terminals into .040 (1,01mm) Dia. Holes.

INS-1 \$2.49



WIRE CUT AND STRIP TOOL

Easy to operate . . . place wires (up to 4) in stripping slot with ends extending beyond cutter blades . . . press tool and pull . . . wire is cut and stripped to proper "wire-wrapping" length. The hardened steel cutting blades and sturdy construction of the bool survey length. the tool insure long life


Strip length easily adjustable for your applications

| MODEL Number | ADJUSTABLE "SHINER" LENGTH OF STRIPPED WIRE INCHES TO INCHES | Price |
|-----------------|--|--|
| ST-100-24 | 1%," 1%," | \$ 8.75 |
| ST-100-26 | 1%," - 11%," | \$ 8.75 |
| ST-100-26-875 | 7/8" 11/8" | \$ 8.75 |
| ST-100-28 | 7/8" — 11/8" | \$11.50 |
| ST-100-30 | 7/8" — 11/8" | \$11.50 |
| | ST-100-24 ST-100-26 ST-100-26-875 ST-100-28 | MODEL WINDER WINDER WINDER ST-100-24 1½" |

MINIMUM ORDER \$25.00, SHIPPING CHARGE \$1.00, N.Y. CITY AND STATE RESIDENTS ADD TAX OK MACHINE & TOOL CORPORATION
3455 Conner St., Bronx, NY 10475 (212) 994-6600 Telex 125091



wire wrapping center

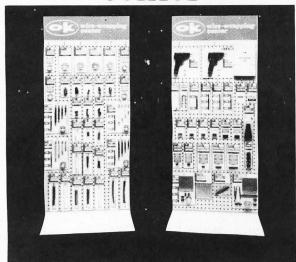


for quality electronic parts and tools.



WIRE-WRAPPING KITS

Contains: Hobby Wrap Tool WSU-30, (50 ft.) Roll of wire Prestripped wire 1" to 4" lengths (50 wires per package) stripped 1" both ends.


| Wire Wrapping Kit. (Blue) | WK-2-B | \$12.95 |
|-----------------------------|--------|---------|
| Wire Wrapping Kit. (Yellow) | WK-2-Y | \$12.95 |
| Wire Wrapping Kit. (White) | WK-2-W | \$12.95 |
| Wire Wrapping Kit (Red) | WK-2-R | \$12.95 |



WIRE-WRAPPING KIT

Contains: Hobby Wrap Tool WSU-30, Roll of wire R-30B-0050, (2) 14 DIP's, (2) 16 DIP's and Hobby Board H-PCB-1.


| Wire-Wrapping Kit | WK-3B (Blue) | \$16 05 |
|---------------------|--------------|---------|
| Will Wildbhill Itil | WW-2D (Dine) | 410.55 |



WIRE-WRAPPING KIT

Contains: Hobby Wrap Tool WSU-30 M, Wire Dispenser WD-30·B, (2) 14 DIP's, (2) 16 DIP's, Hobby Board H-PCB-1, DIP/IC Insertion Tool INS-1416 and DIP/IC Extractor Tool EX-1

| Wire-Wrapping Kit WK-4E | (Blue) | \$25.99 |
|-------------------------|--------|---------|
|-------------------------|--------|---------|

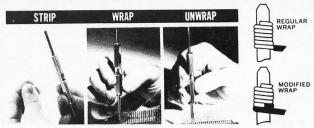

HOBBY WRAP

| Wire-wrapping, | stripping, | unwrapping tool | for |
|----------------|------------|-----------------|-----|
| AWG 30 on.025 | (0,63mm |) Square Post. | |

| Regular Wrap | WSU-30 | \$6.95 |
|---------------|---------|--------|
| Modified Wrap | WSU-30M | \$7.95 |



WIRE-WRAPPING TOOL

For .025" (0,63mm) sq. post "MODIFIED" wrap, positive indexing, anti-overwrapping device.

| For AWG 30 | BW-630 | \$34.95* |
|---------------|---------|----------|
| For AWG 26-28 | BW-2628 | \$39.95* |

| Bit for AWG 30 | BT-30 | \$3.95 |
|-------------------|---------|--------|
| Bit for AWG 26-28 | BT-2628 | \$7.95 |

"USE "C" SIZE NI-CAD BATTERIES

(NOT INCLUDED)



ROLLS OF WIRE

Wire for wire-wrapping AWG-30 (0.25mm) KYNAR* wire, 50 ft. roll, silver plated, solid conductor, easy stripping.

| 30 AWG Blue Wire, 50ft, Roll | R 30B-0050 | \$1.98 |
|-------------------------------|------------|--------|
| 30-AWG Yellow Wire 50ft Roll | R 30Y-0050 | \$1.98 |
| 30-AWG White Wire, 50ft, Roll | R 30W 0050 | \$1.98 |
| 30-AWG Red Wire, 50ft, Roll | R-30R-0050 | \$1.98 |




WIRE DISPENSER

- With 50 ft. Roll of AWG 30 KYNAR* wire-wrapping wire.
- Cuts the wire to length.
- Strips 1" of insulation.
- Refillable (For refills, see above)

| Blue Wire | WD-30-B | \$3.95 |
|-------------|---------|--------|
| Yellow Wire | WD-30-Y | \$3.95 |
| White Wire | WD-30-W | \$3.95 |
| Red Wire | WD-30-R | \$3.95 |

PRE CUT PRE STRIPPED WIRE

Wire for wirewrapping,AWG-30 (0.25mm) KYNAR* wire, 50 wires per package stripped 1" both ends.



| 30-AWG blue Wire, 1" Long | 30-B-50-010 | \$.99 |
|-----------------------------|-------------|--------|
| 30-AWG Yellow Wire, 1" Long | 30 Y 50-010 | \$.99 |
| 30-AWG White Wire, 1" Long | 30-W-50-010 | \$.99 |
| 30-AWG Red Wire, 1" Long | 30-R-50-010 | \$.99 |
| 30-AWG Blue Wire, 2" Long | 30-B-50-020 | \$1.07 |
| 30-AWG Yellow Wire, 2" Long | 30 Y-50 020 | \$1.07 |
| 30-AWG White Wire, 2" Long | 30-W-50-020 | \$1.07 |
| 30-AWG Red Wire, 2" Long | 30 R-50-020 | \$1.07 |
| 30-AWG Blue Wire, 3" Long | 30-B-50-030 | \$1.16 |
| 30-AWG Yellow Wire. 3" Long | 30 Y-50 030 | \$1.16 |
| 30-AWG White Wire, 3" Long | 30-W-50-030 | \$1.16 |
| 30 AWG Red Wire, 3" Long | 30 R 50 030 | \$1.16 |
| 30-AWG Blue Wire, 4" Long | 30-B 50-040 | \$1.23 |
| 30 AWG Yellow Wire, 4" Long | 30 Y 50 040 | \$1.23 |
| 30-AWG White Wire, 4" Long | 30-W-50-040 | \$1.23 |
| 30-AWG Red Wire, 4" Long | 30-R-50-040 | \$1.23 |
| 30-AWG Blue Wire, 5" Long | 30 B-50-050 | \$1.30 |
| 30-AWG Yellow Wire, 5" Long | 30-Y-50-050 | \$1.30 |
| 30-AWG White Wire, 5" Long | 30 W 50 050 | \$1.30 |
| 30-AWG Red Wire. 5" Long | 30-R-50-050 | \$1.30 |
| 30-AWG Blue Wire, 6" Long | 30-B-50-060 | \$1.38 |
| 30-AWG Yellow Wire, 6" Long | 30-Y-50-060 | \$1.38 |
| 30-AWG White Wire, 6" Long | 30-W-50-060 | \$1.38 |
| 30-AWG Red Wire, 6" Long | 30-R-50-060 | \$1.38 |

" KYNAR-PENNWALT

MINIMUM ORDER \$25.00, SHIPPING CHARGE \$1.00, N.Y. CITY AND STATE RESIDENTS ADD TAX

From Big BASIC to Tiny BASIC

Don't tear out your hair if your BASIC seems lacking; tear into this article.

If you've been operating your system for any length of time, you've probably run up against the following situation. While perusing game programs in a book or magazine, you see one that really blows you away; you just have to have it on your system. A closer look results in disappointment: Your version of BASIC lacks a feature essential for the program. You sigh and wonder if you'll ever get a better version of BASIC and curse the authors of your present BASIC.

It's not nice to swear; if your mother heard you, she'd probably faint. So take heart, there are ways around some of those problems; this article takes a look at a few of these solutions.

The Array Problem

There are quite a few programs that make use of two-dimensional arrays; Klingon Capture, Star Trek, Go Maku, Ticktacktoe and Wumpus are just a few. Some programs, like Depth Charge and Qubic, use three-dimensional arrays. These are some of the neatest games around. How will you tell

those neighborhood kids who have been begging to see your system that they can't play Wumpus because you can't program it? What to do? The following discussion is guaranteed to keep you, and the kids, happy.

Let's assume you wish to use a program that makes use of a two-dimensional array. Somehow, you must turn it into a onedimensional array that your version of BASIC can handle (this also applies to changing threedimensional to two-dimensional arrays). First, let's see how an array appears to BASIC. When the BASIC interpreter receives a DIM statement, it looks at the expressions in parentheses that accompany the variable names. Based on those expressions, it then reserves storage for the array elements.

Fig. 1 shows a DIM statement for a ten-by-ten array (called A). Clearly, this array has 100 (10 * 10) elements, so a one-dimensional array of 100 elements should be its exact equivalent. The only problem is

how to index into it. We can't just multiply the two subscripts (M and N) since the product wouldn't be unique. For example, element A(1,2) and element A(2,1) in the old array would both occupy the same location in the new, one-dimensional array.

If we think of an array DIMen-

sioned M by N, we can imagine it as being M groups of N locations. When we use a pair of subscripts, we are actually specifying which group and which member of that group we want. In order to save space (you'll see why we do this shortly), let's start numbering the groups with zero. Thus, we'll

10 DIM A(10,10)

M = 10, N = 10

90 LET A(X,Y) = A(X,Y) + 176

To convert two-dimensional subscripts to one-dimensional, use this formula -((X-1)*N + Y), where -X and Y are the subscripts and N is the second number in the DIM statement.

The program segment becomes: 10 DIM A(100)

90 LET A((X-1)*10 + Y) = A((X-1)*10 + Y) + 176 If, in the above example, X = 7, and Y = 3, we would have: A(7,3) equivalent to A((7-1)*10 + 3) A(63)

Fig. 1.

100 LET R = RN 110 LET T = R 120 LET R = R/N 130 LET R = R*N 140 LET R = T-R + 1 RN is a BASIC random-number function

N is the modulus of the random # we want

Gives random # R where 1 ≤ R ≤ N

Fig. 2a.

ORIGINAL CODE: 150 LET R = RND(0)

160 IF R < .1 THEN GOTO 500

TINY BASIC EQUIVALENT: 150 GOSUB 1000 * Get a mod 100 random # R

160 IF R< 10 GOTO 500

*Assume that line 1000 starts a subroutine like 2a with N=100.

Fig. 2b.

have group 0, members 1 through N, and so on, all the way up to group M-1, members 1 through N.

Suppose that the subscripts for array A in our original program were X and Y and that the array has been DIMensioned M by N. Now, since we want to start with group 0, we'll need to subtract 1 from the X subscript wherever it appears to specify the group. Since the groups have N members each, we'll also need to include that factor (the N) as well as the Y subscript to tell with which member of the group we're dealing.

Fig. 1 lists, and provides an example of, the formula for converting two-dimensional array subscripts to one-dimensional if you take all those factors discussed above into account.

Modulus Number

Random numbers, a big part of computer games, generally

have to be in a particular range. If you have an eight-by-eight grid, you don't want to come up with numbers like 163 and 59; you want numbers between 1 and 8. The range of a random number is called its *modulus*. So, for an eight-by-eight grid, we need a modulo-8 random number.

Many BASICs generate random numbers in the range of zero to one $(0 \le R \le 1)$. Getting that into a range you can use in a game is quite simple... just multiply by the modulus number (8 in the example we've been using). Some BASICs, though, generate random numbers in a different range, 0 to 32767, for example. Obviously, that doesn't do us much good if we want a number between 1 and 8.

In division the remainder is always in the range of 0 to D-1 (where D is the divisor). This should give you a clue as to how we're going to get our random number. Fig. 2a shows how to get to that remainder in BASIC. This particular example is with a version of BASIC that only has integer arithmetic; so if yours uses floating point, you'll have to make use of the INT function in all the calculations.

Many times programs use random numbers to determine if something good or (more likely) bad will happen to a player. Since they are using numbers between zero and one, and want a ten percent chance that a given thing will happen, some code such as that in Fig. 2b should be provided.

Replacing ON-GOTO

Programs, particularly games (of course), often use the ON-GOTO feature of BASIC. However, this extension is not available with many versions. The obvious way to get around this problem is to replace the ON-GOTO with several IF statements. This lacks elegance and also uses an incredible amount of storage; but with a little judicious line numbering, it is

of most versions of BASIC will choke on it and foul everything up. Here's what generally will happen. A number starting the expression will be changed to correspond to whatever it should be, and the rest of the expression will be left alone. The relationship between the sections of code that this technique depends on will be destroyed in any case. If you enclose the entire expression in parentheses, it will be unchanged, but once again, the relationships down in the program will be fouled up. This will also happen if a variable, instead of a number, begins the expression. The answer to this problem is not to use the renumbering function.

One of the most aggravating occurrences in a program is to come across two-character variables (i.e., alpha characters followed by numbers) if your version of BASIC doesn't allow them. The answer to this problem is incredibly simple: DIMension an array with the alpha character as its name and use the numeric portion of the orig-

ORIGINAL CODE: 100 LET B1 = ((B2*C3 + B3)/C5) + B4NEW CODE: 1 DIM B(4),C(5) ...

100 LET B(1) = ((B(2)*C(3) + B(3))/C(5)) + B(4)Fig. 4.

ORIGINAL CODE: 100 ON X GOTO 1000,1100,1200,1300,1400
TINY BASIC CODE: 100 GOTO 900 + (X*100)

The GOTOs Technique

100 GOTO 5000 + X-1

. 5000 GOTO 126 5001 GOTO 713 5002 GOTO 2010 5003 GOTO 1075

This is the equivalent of: 100 ON X GOTO 126,713,2010,1075

Fig. 3.

possible to form a very short replacement for the ON-GOTO.

This technique requires that the various segments of code must all be numbered in some way to be calculated more easily and uniformly. For example, they might start on hundreds (see Fig. 3). If you can't renumber the program to match a pattern, you can place several GOTOs in the program to get to the required location. This is not as elegant, but it is better than several IF statements, and it makes it easy to add new commands.

There is one major problem with using an expression in a GOTO or GOSUB statement: The line renumbering function inal name as a subscript. If your BASIC doesn't allow zero as a subscript and it is used in the original program, just add one to all the subscripts.

Fig. 4 illustrates this technique. You may waste some space in unused array locations, but if you want to run the program...

You'll also find that building an array will be useful in programs that use a lot of variables. When it appears you'll run out of letters and you can't use those two-character names, just DIMension an array to whatever size you need and you have that many more variables to use (T for Temporary is a good choice for the name).

MICRODESK



The perfect home for a personal or business computer

MICRODESK \$139.50

48" x 24" x 26", Shelves 23" x 23", One adjustable. See it at your computer store or order it from:


COMPUTER SYSTEMS DESIGN

906 N. Main

Wichita, Kansas 67214

DEALER INQUIRIES INVITED

KIMSI



The KIM to S-100 bus Interface/Motherboard

- Combines the power of the 6502 with the flexibility of the S-100 bus
- Attaches to any unmodified KIM
- Complete interface logic and fully buffered motherboard in one unit
- On-board regulation of power for KIM
 Eight slots of S-100 compatibility for additional RAM, Video and I/O boards, PROM Programmers, Speech processors.
- Includes all parts, sockets for ICs, one 100 pin connector, and full Assembly/Operating documentation
 - Kit \$125, Assembled \$165
 - · All units shipped from stock

FORETHOUGHT PRODUCTS



P.O. Box 8066-H Coburg, OR 97401



KIM-1 FXPANSION

- 0 KIM-4 Motherboard \$119.00 8K Static RAM \$195.00 8K PROM Board \$195.00 64 Character/line Video \$149.00
- 0 KIMSI S-100 Motherboard \$165.00 8K Static RAM \$197.00 32K Static RAM \$599.00 64 Character/line Video \$149.00
- 0 KEM S-100 Motherboard \$155.00 includes sockets for 4K 2708 on board 64 Character/line Video Module \$255.00 8K Static RAM \$197.50 32K Static RAM \$599.00
- 0 HDE Floppy Disk
- 0 PROM Programmers

All items are available from stock.



P.O. BOX 523 MEDINA, OHIO 44256

(216) 725-4560

J4



8K KIM EXPANSION SPECIAL

TWO 4K RAM KITS KIM INTERFACE KIT COMPLETE 8 SLOT MOTHERBOARD SET WITH CABLE

\$ 219.00

\$245.00 If purchased separately

YOUR TICKET TO LOW COST SYSTEM EXPANSION



25 SOUTH 300 EAST · SUITE 215 · SALT LAKE CITY, UTAH 84111 · 714/752-1374

Instant Software

only \$7.95 each

THE FIRST SIX PROGRAMS:

- PERSONAL WEIGHT CONTROL/BIORHYTHMS—SP0105—by Microcosm (for the PETTM) Here's a program that will let you chart any individual's biorhythm cycle, showing physical, emotional, and intellectual highs and lows. If your neighbors find out you've got it, they will never leave you in peace. PERSONAL WEIGHT CONTROL is a must for the dietconscious. Once your ideal weight has been determined, the program will calculate the correct daily caloric intake necessary to reach your goal over a certain time period. \$7.95.
- SPACE TREK II —SP0102—by Ed Juge (for the TRS-80TM) This Space Trek game will challenge the most skillful and careful player. As commander of the Enterprise, you must defend the galaxy against enemy Klingon warships using your arsenal of phasers and photon torpedoes to best advantage. The Enterprise is also equipped with impulse power for moving within the quadrant, and warp power for jumping from quadrant to quadrant. \$7.95.



● BEGINNER BACKGAMMON/KENO—SP0104—by Fred Schild and Ed Juge (for the TRS-80TM) You wll never be in need of a backgammon companion again! Schild's program is designed for the newcomer to the game, but the computer's steady play will challenge the careless expert. KENO is a popular Las Vegas gambling game. As in many games of chance, the odds are against you, but when you win you can win big. \$7.95.

• BASIC LUNAR LANDER/INTERMEDIATE LUNAR LANDER—SP0101—by Ed Juge (for TRS-80TM) Your automatic landing system has malfunctioned and you are forced to make a manual landing. Taking control at 15,000 feet, the pilot's success requires precise manipulation of the lunar lander's retro-rockets. After mastering the basic game, the able commander will be taxed by the difficult intermediate program. \$7.95.

● MORTGAGE WITH PREPAYMENT OPTION/FINANCIER — SP0106 — by Microcosm (for the PETTM) Before you go to the bank, calculate your mortgage payment schedule and find out what you can afford. You will learn how much prepayments save, and can easily compare the true costs of variations in interest. FINANCIER is actually three programs in one and is guaranteed to make you a financial wizard. In part I, you'll learn to tell which investments will pay off. Part II calculates annual depreciation schedules, providing rates, amounts, and salvage values, which is great when tax time rolls around. The final section figures costs of borrowing, payment terms, and remaining balances on loans of all sizes. ₹705

THE KILOBAUD PACKAGE—CASSETTE PLUS BOOK Each Kilobaud software package includes an informational booklet as well as a cassette. The book provides a hard-copy version of the program as well as information about the program's operation, design, and intended use.

KILOBAUD QUALITY CONTROL Kilobaud cassettes are produced in the same audio lab that has been turning out thousands of ham radio code tapes each month, with an enviable record of quality control. To make sure that Kilobaud's cassettes establish a high level of quality in the field, each tape is individually tested, and the best tapes available are used.

MORE TO COME... As of this printing, over 100 different programs have been tested in the Kilobaud lab, and are being readied for publication. Use the coupon below to order our FREE software catalog. You'll be able to get prerecorded programs in business, electronics, hobby games, self-study including: small business, accounting, checking account/general ledger, the slot machine game, home checkbook handler, a simple mailing system, home weatherman, personal stockbroker, the missle game, and many others.

| Please rush me | Qty. | Catalog # | Description | Unit Price | Tota |
|--|--------|---------------|---|---------------|------|
| he following cas- | | | | | |
| ettes: | | | | | |
| Send me your | | | | | |
| REE software | | | | | |
| talog | | | | | |
| | | | Add \$1.00 shipping & handling for orders | under \$10.00 | |
| · Toll Free Ordering e Your Credit Card | Coupo | on expires in | 60 days. | Total: | |
| And Call | Enclos | sed \$ | □ Check □ Money order □ Bill me | (subs only) | |
| 1(800) 258-5473 | Bill m | y: Americ | an Express 🗆 BankAmericard/Visa | ☐ Master Ch | arge |
| | Credit | card # | | | |
| | Expira | ation date | Signature | | |
| obaud) | Name | e | | | |
| | Addr | ess | | | |
| orough nh O3458 | City | | State | Zip | |

KB 9 / 78

TROUBLE-SHOOTERS' ______CORNER

(from page 11)

practically identical. The VIM drives (successfully) the same VIA we've been discussing.

Now let's take a closer look at Steve Wozniak's use of Ø1. There are two Ø1s, and they're not the same. The real Ø1 comes out of pin 3 on the 6502, goes through gate C14, and gates the buffer amplifiers for the data bus—a critical timing function. This is a good straightforward design.

The other (bogus) line labeled \emptyset 1 comes out of the \overline{Q} (B1, pin 6) of the same flip-flop that drives the bogus \emptyset 2 (really \emptyset 0 and the gate delay of B11). This is the bogus \emptyset 1 which appears on the interface bus at pin 38. It is really the inverse of the bogus \emptyset 2 (pin 40) and is closer to being $\overline{\emptyset}$ 0 than the real \emptyset 1.

I haven't checked all the places where this bogus Ø1 is used, but it is operating successfully on the main board and video, so it's probably OK. Since we have no intention of using it with the VIAs or PIAs, we'll let it off with a warning: It has been determined that the use of Ø1 on the user bus may be dangerous to the health of any I/O design. Since gate C14 is an LS device, the real Ø1 should be able to drive one or more additional buffers, if a new design should prove critical in this area. For now, we'll leave it—as is.

Some Troubleshooting Fundamentals

I said earlier that I had been looking for something like this with which to illustrate some of the theory of troubleshooting. Let's get into the fundamentals of "defining the problem." There are probably as many ways of defining a problem as there are problems—but the majority of techniques for troubleshooting hardware bugs fall into three methods and the combinations formed thereof.

The fastest and usually most practical is *substitution*. The next is *signal tracing*. These two are indigenous to nearly all electronic devices. A third (peculiar to computers) is hardware/software trade-off. Eventually, I expect to dedicate a whole column to each, but for now we'll take a little

"preview of coming attractions."

Substitution. Substituting is even more effective in trouble-shooting than on the playing field. It requires a minimum of knowledge and training, and can usually isolate a problem faster than any other method. It's my first choice whenever practical.

Substitution has two major drawbacks. The most common is that there is often no spare available to substitute. The second is best illustrated by the example of replacing a fuse. If the fault is still present, the "substitute" fuse is destroyed. This is a sobering thought when expensive or hard-to-get devices may become "fuses."

If I intend to swap chips or boards, I try always to check the supply voltages as close to the suspected fault as possible, before swapping. A solder bridge or loose bit of metal lodged between two device leads can zap a \$50 IC in a split second. If the supply voltages are OK and the circuit was OK at some earlier time, then burnouts due to swapping on 5 V TTL/MOS systems are rare. On the other hand, if you've been fooling around with a soldering iron or reconnecting cables, then beware!

Signal Tracing. If substitution isn't practical, then your next best bet is signal tracing. If you've ever tried to follow a carnival con-man with his three-card monte or shell-game movements, then you have some idea of what it was like trying to trace out the results of substituting the real 02 for the 00 in the foregoing example.

Signal tracing usually falls into one of three general categories: signal detection (using scopes, pulse catchers, voltmeters, etc.), signal injection (using pulse injectors, oscillators, waveform gen-

erators, etc.), and a relatively new system of signature analysis. Signature analysis is too new (and expensive) for me to use, but as devices become more complex it may become the best practical way to accomplish in-field signal tracing. The other two techniques were used extensively in the example at hand.

The most powerful tool is the Hewlett-Packard #1615A logic analyzer used by EDN. I doubt whether many personal computing fans can afford one, or even have access to one (certainly I don't). On the other hand, a dualtrace oscilloscope is usually available in a metropolitan area if you have enough friends. A few years ago a voltmeter, VTVM (vacuum tube voltmeter) or DVM (digital voltmeter) was an absolute necessity for any kind of electronic troubleshooting, and when it comes to power supply and analog problems, they're still a must

The advent of TTL and CMOS technology produced some new devices: the pulse-probes. They are rapidly becoming a must, and I hope we'll be doing a special article on them in the near future. If you have access to a good dc scope, it can usually duplicate the functions of a meter and/or a pulse probe.

The most common method of signal tracing is to put a normal signal into an input and follow (or trace) it from one device to the next using one of these tracers, until you find a place where it misbehaves. This can get rather complex, as the *EDN* article testifies. A not-so-often-used method is to inject a signal into the system and watch what comes out. We did this in testing the VIAs by building up a counter circuit that would provide a known pattern on the VIA input bus.

Hardware or Software?

Many troubleshooting aids can be implemented in either hardware or software. Most large corporate-development efforts (EDN included) are polarized into hardware- and software-type personnel.

Personal computing is breaking down this barrier, and one of the advantages of mixing these two disciplines is that the tradeoffs between them can be used for troubleshooting. On the one hand, I mentioned the hardware counter we used to provide a known digital input. On the software side, we wrote loop programs that generated an alternate AA (1010 1010) and 55 (0101 0101) pattern so that we could trace through hardware with the scope.

The diagnostic system built into the PET is a giant step in the direction of using software to troubleshoot hardware. When people get tired of writing programs for games, maybe they'll put some effort into writing diagnostic programs directed towards isolating faults. Of course, the basic fallacy occurs when you try to use a faulty system to troubleshoot a faulty system.

Let me point out the spots where we used some of the specific, fundamental troubleshooting methods I've just described. By substituting Dave's PR-40 printer interface with its PIA, we were able to identify the problem of using POKEs from BASIC (more on that later). By generating test patterns with software loops, we were able to trace the bogus 02 waveforms and compare them using an oscilloscope. By swapping back and forth between the VIA and PIA and signal tracing, we established that, with a marginal

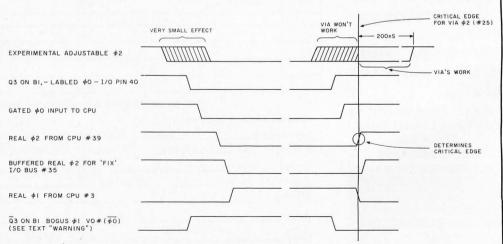


Fig. 3. One MHz clock timing diagram for Apple II illustrating errors uncovered by EDN and the Inmarco "fix."

system:

- 1. It's easier to write than read.
- 2. The PIA was less critical than the VIA.
- 3. Both worked if the rising edge of the driving pulse was delayed with respect to the real Ø2.
- 4. The 2708 memory would function on the same card as the PIA, even when the card was driven by different Ø2s.
- 5. The chances are very good that any other member of the 68XX or 65XX I/O devices can be expected to work on a modified Apple II, but we have no intention of proving it.
- 6. The "fix" for our Apple II consists of one TTL gate delay costing less than 25¢ (remember what I said about the defining being tough and the fix being easy?).

Things That Go Bump in the Night

Haunted houses, cemeteries and strange noises late at night are all part of a basic fear in mankind-the fear of the unknownthe what-if syndrome. Last weekend I was plagued with many fears. This weekend they're (nearly) all gone. There was still the problem of why we couldn't POKE into the PIA or VIA from BASIC.

After modifying the board for the real Ø2 buffer, we tried the BASIC program experiment again, with the same negative result. The VIA would work with machine code but not with BASIC, and the same double pulse showed up where there should only have been one. It really wasn't a problem for us because we expected to program in machine code, but it bothered me.

Synergistic Synectics

You may recall that I rated the synectic relationship of Dave Gordon as a top priority "asset." As it worked out, we didn't need this "tool" until Friday, but it was there and probably cut a full day off the debugging. As I said, Dave is neither an engineer nor a programmer, but he has assets that make these two skills redundant.

Dave is a gregarious, naturalborn "horse trader" in the best American tradition. Personal computing is a fertile field for bartering, and Dave revels in it. His collection of programs and

accessories for the Apple II is probably the largest in existence, but he "collects" something else with even more vigor: friends. He's up half the night with them, running new programs, expanding horizons, swapping "things" and information-all with an infectious, unbridled enthusiasm. If he doesn't meet enough people through the various computer clubs he belongs to, he'll have a barbecue at his home with the top brains in the Apple Corps.

This is what synergistic synec-

tics is all about, and when an article like the EDN piece threatens their rock-solid belief that the Apple II is the best-thing-thatever-happened-to-humanity, things happen.

The day after we started debugging, I found myself on the phone being introduced to Dave's friends, who were eager to help out. It turns out that Craig Vaughn and Sandy Tiedman had encountered the same problem and "fixed" it by using CMOS delays on the PIA boards just as

we had done the first day-but they had fixed the bug long before the EDN article was published.

While discussing with Sandy what we'd found on Friday afternoon, I described the bug we'd observed in using the BASIC POKE command. He called back later to report that his Apple II worked fine with BASIC. On Saturday I had a long talk with Craig, and he agreed to try the same experiment. When we got back to software, we found our

P.O. Box 4430M Santa Clara, CA 95054

For will call only: (408) 988-1640 Same day shipment. First line parts only. Factory 2322 Walsh Ave. tested. Guaranteed money back. Quality IC's and 03 other components at factory prices. . INTEGRATED CIRCUITS 8 50 24 95 6 30 1 49 40 3 00 9 95 5 94 4 00 5 99 13 95 1 75 6 95 4 50 9 95 3 50 ELECTRONICS CD4528 CD4586 CD4586 CD4586 CD4586 CD4586 CD4586 CD4588 CD458 39 30 35 47 51 1 89 35 35 35 67 67 67 91 91 95 1 06 67 89 506 21 1 1 22 1 3 6 6 8 6 6 6 6 9 9 4 1 2 2 1 8 6 6 8 6 6 6 9 9 4 1 1 1 2 2 2 1 8 6 6 7 7 9 2 1 1 1 2 2 2 1 7 5 6 3 6 6 7 7 9 2 1 1 1 2 2 2 1 7 5 6 3 6 6 7 7 9 2 1 1 2 2 1 7 6 7 9 1 1 7 6 7 9 1 7 9 CLOCK MODULES Comp ready to hook up with switches. Very compact CLOCKS MM5309 MM5311 MM5312 MM5313 MM5316 MM5316 MM5316 MM5369 MM5841 MM5865 CT7001 2.95 \$229.00 green flour, display Fair MCS 6300 .63" 15.95 9.95 \$369.00 300 ma Volt 300 ma tran 6V CT 600 ma KEYBOARDS Hex keyboard \$10.95. Fully encoded w/ PC board, parts and instructs. \$24.95 53 key ASCII keyboard kit 55.00 LINEAR DISPLAY LEDS MAN1 MAN3 MAN72/74 Steen, Urlinge, Yellow Jumbo

Jumbo Reg.

Lymbo Reg.

Cliptile LED Mounting Dips 831.025

Cliptile LED Mounting Dips 831.025

Complete len of breadboard test equip.

MAX-100 8 digit Free, Cr. \$122.85

CN WIRE WIRPAT TOOLS in 190.000

DIGITAL THEMPAT TOOLS in 190.000

Batt oper General purpose or medical control of the c MM53104 IC SOCKETS Solder Tin Low F PIN 1 UP PIN 8 .15 .22 14 .18 .24 16 .20 .28 18 .27 .36 20 .29 40 3 level wise wrap go S Profile 1UP .30 .35 .42 .58 1.75 1.75 1.00 60 39 9.50 MOS/ RAM 2101-2102-1 2102AL 21F02 1104A-4

Sinclair 31/2 Digit Multimeter Batt./AC oper. 1mV and .1NA resolution. Resistance to 20 meg. 1% accuracy. Small, portable, completely assem. in case. 1 yr. \$59.95 quarantee. Best value ever!

Not a Cheap Clock Kit \$14.95 Includes everything except case. 2-PC boards. 6-.50" LED Displays. 5314 clock chip, transformer, all components and full instrucs. Green and orange displays also avail. Same kit w/.80" displays. \$21.95

Digital Temperature Meter Kit Indoor and outdoor. Switches back and forth, Beautiful, 50" LED readouts, Nothing like it available. Needs no additional parts for complete, full operation. Will measure – 100° to +200°F, tenths of a degree, air or liquid. Very accurate. \$39.95 Beautiful hardwood case w/bezel \$11.75

NiCad Batt. Fixer/Charger Kit Opens shorted cells that won't hold a charge and then charges them up, all in one kit w/full parts & instruc. \$7.25

RCA Cosmac VIP Kit 275.00 Video computer with games and graphics.

78 IC Update Master Manual 1978 IC Update Master Manual \$30.00 Complete IC data selector 2175 pg. Mas-ter reference guide. Over 42,000 cross references. Free update service through 1978. Domestic postage \$3.50. Foreign \$6.00. Final 1977 Master closeout **\$15.00**

New Cosmac Super "ELF" RCA CMOS expandable to 64K microcomputer w/HEX keypad input and video output for graphics. Just turn on and start loading your program using the resident monitor on ROM. Pushbutton selection of all four CPU modes. LED indicators of current CPU mode and four CPU states. Single step op. for program debug. Built in pwr. supply, 256 Bytes of RAM, audio amp. & spkr. Detailed assy man. w/PC board & all parts fully socketed. Comp. Kit \$106.95. High address display option 8.95; Low address display option Custom hardwood cab.: drilled front panel 19.75; Nicad Battery Backup Kit w/all parts 4.95; Fully wired & tested in cabinet 151.70; 1802 software club. 10-12 pg. monthly publication 12.00 per yr.

4K Elf Expansion Board Kit with Cassette I/F \$79.95 Available on board options: 1K super ROM monitor \$19.95 Parallel I/O port \$7.95 RS232 I/F \$3.50 TTY 20 ma I/F \$1.95 S-100 Memory I/F \$4.50

Tiny Basic for ANY 1802 System Cassette \$10.00. On ROM Monitor \$38.00. Super Elf owners, 30% off. Object code listing or paper tape with manual \$5.50.

Original Cosmac "ELF" kit \$89.50 All parts and instructs 14.95 Board only

Video Modulator Kit Convert your TV set into a high quality monitor without affecting normal usage. Complete kit with full instructions.

60 Hz Crystal Time Base Kit \$4.40 Converts digital clocks AC line frequency to crystal time base. Outstanding accuracy. Kit includes: PC board, MM5369, crystal, resistors, capacitors and trimmer.

Clock Calendar Kit CT7015 direct drive chip displays date and time on .6" LEDS with AM-PM indicator. Alarm/doze feature includes buzzer. Complete with all parts, power supply and instructions, less case

2.5 MHz Frequency Counter Kit Complete kit less case \$37.50 30 MHz Frequency Counter Kit Complete kit less case Prescaler Kit to 350 MHz \$47.75 \$19.95

Stopwatch Kit \$26 95 Full six digit battery operated. 2--5 volts. 3.2768 MHz crystal accuracy. Times to 59 min., 59 sec., 99 1/100 sec. Times std., split and Taylor, 7205 chip, all compo nents minus case. Full instruc. Mold plastic case with hezel \$5.00

Auto Clock Kit DC clock with 4-.50" displays. Uses National MA-1012 module with alarm option. Includes light dimmer, crystal timebase PC boards. Fully regulated, comp. instructs. Add \$3.95 for beautiful dark gray case. Best value anywhere

TERMS: \$5.00 min. order U.S. Funds. Calif residents add 6% tax. BankAmericard and Master Charge accepted. Shipping charges will be added on charge cards.

FREE: Send for your copy of our NEW 1978 QUEST CATALOG. Include 28¢ stamp.

own bug, and now our BASIC is home free. The point to be made is, how would you tackle a problem like this—without friends? How long would it take to solve it? How much manpower? How much equipment?

A Rebuttal

A "box" in the EDN article recounted all the shortcomings of the 6502 programming language. At the end, Mr. Jack Hemenway asked the rhetorical question, "Of course programmers can get around all of the above problems, but why should they have to?" Now let's be fair! He obviously preferred to program the 6800—so do I, but there are reasons why the 6502 is designed into so many computers.

Since I have eleven 6800 micros, an excellent 6800 program development system and a personal preference for 6800 language, why did I buy an Apple (6502) . . . even after reading the EDN article? Probably the most important reason is speed. A single byte register is faster than a double byte; it's a trade-off between hardware and software. If

you want the speed, you write more code.

Hemenway made no mention of some of the 6502's pluses, such as the three-way branch capability after a bit test, the decimalbinary shift and the indirect address capabilities. No mention was made of the "sweet sixteen" ROM interpreter, which gives the Apple more double-byte power than any 6800 system I'm aware of. If you want to prove the speed difference to yourself, try benchmarking a program in BASIC (such as a bubble sort) on a PET (6502) and then on an SWTP, Altair 680 or Sphere (6800s).

I personally bought all of these machines. For my money, the 6502 can outperform the 6800 when it comes to speed, but it's not as easy to program. Do you design a microcomputer to please the end user or the programmer? I've been reading *EDN* ever since its inception, and I can't recall its ever being as editorially unfair as it was in this article.

Fan-atical Behaviors

If you've ever witnessed the spectacular behavior of a Dodger

fan at World Series time, you've seen histrionics and heard exaggerations (from otherwise "normal" people) that make a used-car salesman look like a saint. In Europe, soccer matches can lead to bloodshed. If you've ever watched a PET lover battle it out toe-to-toe with a TRS-80 devotee, you've seen elements of the same phenomenon—but when the shouting's over, even the most dedicated fan knows that in Mudville even the mighty Casey can strike out.

I enjoy observing Dave and the members of the Apple Corps. I know that Dave realizes that the Apple has a design error in it. Even if it can be fixed for 25¢, any bug that requires the amount of troubleshooting effort that this one did is *serious*. He may verbally refer to it as a "little one," but he knows better, and (in private) admits it.

Rationality through Diversity

If *EDN* were to scrap the Apple-Indecomp project because of a "two-bit" defect, I, for one, would consider it grounds for serious criticism. *EDN* might well

examine the factors that have made the Apple one of the largest selling micros in history! Can all those people be *that* wrong?

In delineating the shortcomings of the 6502, Jack Hemenway cries out to "move on" to a different microprocessor (probably 6800). I agree that EDN should move on, but not yet! The 6809 and 8086 double-byte CPUs are just around the corner, and I know of at least two houses that intend to put them into computers as soon as they're commercially possible. I heartily agree with EDN's original choice of CPUs. In my opinion the Apple II was, and is, the best one for the Indecomp project (until the doubles appear).

Personal bias is one thing; responsible editorial bias in a major publication is something else. I repeat Bob Jones's statement: "If we all work together on this thing—we can all be successful, together." Synergism!

If you have interesting problems, solutions, comments, or indeed, anything you believe can help others, or that we can help you with in this area, drop a line to: Troubleshooters' Corner, Kilobaud Magazine, Peterborough NH 03458.

UBLISHER'S REMARKS

(from page 21)

price, which for programs retailing for \$7.95 will come to around \$1 per cassette. On a sale of 50,000 this would amount to about \$50,000 in royalties.

When you submit your program, be sure to check and recheck the cassette to make sure what version of using, what or recording, etc.

it loads properly on your own system. Send us a cassette, a listing of the program (if you have one), a write-up on how to use the program, who you think would be interested in it, what it does for the user, etc. The more complete the documentation, the better. If there are any variables that users might want to change, indicate them and the line numbers that should be changed.

If you are using other than an 80 or a PET, be sure to tell us what version of BASIC you are using, what cassette system of recording, etc.

Contest!

The voting for the best article in the June issue was very heavy, and a preponderance of ballots were cast in favor of "8080, Z-80 or 8085" by Michael Slater.

Winner of a book from the KB Book Nook is Robert Herbold of the nation's capital.

To Michael and Robert we offer congratulations; to our readers, we say: Keep voting!

Our Job

As mentioned, we'll check out your program with a panel of experts and try to come up with the best and most useful program possible. You'll be consulted on any changes. We will need a signed statement of original work from you to protect us in any copyright problems. If your work is not entirely original, you should get in touch with the programmer who did the original work and strike a deal with that person for the rights. Obviously, we prefer wholly original material . . . it is simpler to protect.

Once we are ready to go we'll duplicate your program and put it out on cassette . . . into the approximately 1000 computer stores, and, if it is for the 80, it could go into some 7500 or more Radio Shack stores. If it only sells an average of ten copies per store, you'll have 86,000 programs sold! Royalty checks will be coming every month.


Wiped Out!

One whole week down the

drain! Well, it could have been worse, of course...it could have been a month. But perhaps you can imagine the shock when the *Kilobaud* Lab group discovered that the entire stack of software master cassettes had been zapped by accident.

With three of the Radio Shack TRS-80 systems being used to check out programs and make up cassette masters for duplication, the systems take up a good part of one workbench. When a cassette master was finished and checked out it was put in a stack of other masters. The only problem was that the stack of masters was right next to one of the TRS-80 power supplies. And do you know what they have in those power supplies? They have a transformer, complete with the usual magnetic field, and any tape put near it gets wiped out. Try it for yourself and see.

So it was back to the old drawing board . . . and a mad hunt through the many duplicated cassettes to reconstruct the master tapes. It only took a few days to get them back into shape, but with several thousand orders hanging fire even that time loss was painful. You may be sure that the power supplies are now well out of the way.

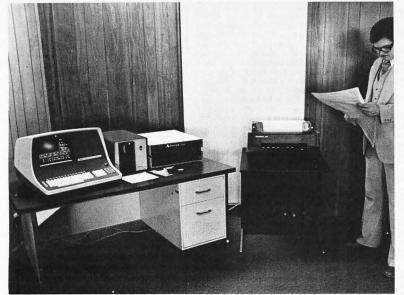

SYSTEM 710

COMPLETE BUSINESS COMPUTER ACCOUNTING SYSTEMS

WITH FULL PROFESSIONALLY DESIGNED SOFTWARE PACKAGES INCLUDING GENERAL LEDGER, ACCOUNTS RECEIVABLE, ACCOUNTS PAYABLE, POINT-OF-SALE INVENTORY, SORTING, MERGING AND MAIL LIST PROGRAMS. ALL PROGRAMS SHARE A COMMON DISK FILE DATA BASE AND THEREFORE, INSTANT, UP-TO-THE-MINUTE BALANCE SHEETS AND PROFIT/LOSS STATEMENTS ARE NO LONGER A DREAM, BUT ARE NOW REALITY.


DELTA SYSTEM 700

Disappointed by many of the "business" systems you've seen?

integrated system (THAT WORKS!) available now which is just right for your needs and budget. Our SYSTEM 700 series of business computers offers completely interactive and self-prompting programs which even your secretary could operate

Nice hardware, but no software, RIGHT? At last there is a totally

after only 2-3 hours of familiarization.

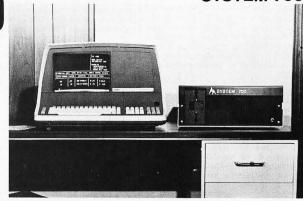

THE SYSTEM ALSO OFFERS:

Multi-User Capability (your parts room can run inventory while bookkeeping does general ledger)

Word Processing (computer generated forms and letters which look individually typed)


Broad Peripheral Base (6.4 Megabyte floppy disks, 29-70 Megabyte hard disks, Multi-Terminal Adapters, Modems, Controller Interfaces and more)

Graphics Capability

User Programmable (Compilers, Assemblers, etc.)

Extensive Software Library including Cash Flow Analysis, Buy/Lease Analysis, Loan Analysis, Production/Man-hour Ratio Analysis programs, and many more Business/Management aids available at a nominal price.

Full Factory and Dealer service and maintenance support nationwide.



6800 CPU

Based on our FAST 6800 Central Processing Unit which utilizes the industry standard S-100 mainframe for full compatability with many other S-100 products. (CPU available separately, call for prices)

STARTING AS LOW AS \$5999*

*INCLUDING SOFTWARE GL, A/R, A/P, INVENTORY PROGRAM PACKAGE AB-1



DATATRONICS, INC.

208 EAST OLIVE · 303/336-7956 LAMAR, COLORADO 81052 Dealer and Distributor inquiries invited.

D30

See us at BizComp'78 Booth 3 Atlanta, Ga. OCT. 27-29

Kilobaud Classified

Kilobaud classified advertisements are intended for use by those individuals desiring to buy, sell, or trade used computer equipment

or software. No commercial ads are accepted.

Two sizes of ads are available. The \$5 box allows five lines of about 22 characters each, including spaces and punctuation. The \$10 box provides ten lines of type — again, each line is about 22 characters. Minimize capital letters, as they use twice the space of small characters. Payment is required in advance with ad copy. We cannot bill, or accept credit. Oversize ads are not accepted. Each subscriber is limited to two (2) identical ads in any given issue.

Advertising text and payment must reach us 60 days in advance of publication. For example, advertising copy for the March issue (mailed in February) must be in our hands on January 1. The publisher reserves the right to refuse a questionable or not applicable advertisement. Mail advertisements to: KILOBAUD CLASSIFIED, Kilobaud, Peterborough, NH 03458. Do not include any other material with your ad, as it may be delayed.

Regulated power supplies, tested working 5 V @ 25 Amp, \$95, freight collect, UPS. A. Khan, 2355 Burch Cir., N.E., Atlanta GA 30319, (404) 325-0089.

TRS-80 Level I 4K—5 pop. games. Orig.—graphics & score—cassette, \$7. C. Zalnerunas, 3034 W. Columbus Ave., Chicago IL 60652

Variety of programs on cassette for Radio Shack TRS-80. Details from Dr. S. Harter, Box 17222. Tampa FL 33682.

TRS-80, 4K min., Level I BASIC. Alpha/numeric graphics. Magnify letter/nums up to 6X. Excellent for displays. Displays more than 80 chars.; up to 16 chars. at a time; A-Z, 0-9 & some spec. chars. \$10 on tape w/doc. To: EMFW, Box 438, Oakhurst NJ 07755

Mod. 35 KSR, sprocket fd, 2 color ribbon, \$500. Harding, 6724 Lynmont Dr., Charlotte NC 28212. (704) 364-4770 or 568-6856.

TRS-80, 4K min., Level I BASIC. Play Keno, Las Vegas style, with same odds & chances as a casino game. Play with 1 to 15 people at a time. Computer keeps track of winnings & nos played for each. Great family fun. \$10 on tape w/odds & inst. To: EMFW. Box 438. Oakhurst NJ 07755.

Heath H8, 16K, H9, cassette, Ext. BASIC. Up & running. \$1250. Also, 10 new DPI 8-in. disks, \$25. 1 pay shipping. A. Thornburg, RR 2, Thompsonville IL 62890. (618) 627-2166.

North Star Software Specials: Investment Analysis Package: \$25. Home/Family Package: \$25. Game Pack: \$15. All these disks are full and just packed with programs! Order now, or write for complete list. Herbert Schildt, 1007 N. Division, Urbana IL 61801.

TRS-80—Several business and accounting programs available on cassette. Depreciation, financial analysis, income tax, interest calculations, real estate selection and evaluation and more. Write: C. Jones, 658 Edinboro Rd., NW, Atlanta GA 30327.

Bally Owners and hopefuls are banding together for our mutual benefit to extract the maximum usefulness from this unit. Anyone interested is invited to write Bob Fabris, 3626. Morrie Dr., San Jose CA 95127 with a SASE.

TRS-80 Software w/doc. Level I BASIC—comes on cassette completely tested & debugged. *Games Package (7 games), \$12. *Education Package, \$12. *Stock or Option Analysis, \$12. *Utility Analysis Pgm. (elec., gas, tel.) Analyze your outlay by month & yr., \$10. All programs easily adapted to other BASICs. 15 yrs. experience assures quality. J. Fox, 27 Prince Wm. Rd., Morganville NJ 07751.

Sell: Computer terminal Hazeltine 2000 series, good condition, with detached keyboard, \$475 plus shipping. Vic Jurkovic, 325 Wilson Ave., Westwood NJ 07675. (201) 664-6833.

TRS-80 Sci-Fi/Fantasy Games (4K, LI): Exciting & sophisticated simulations, which include: Galactic Blockade Runner, a space war game—\$9.95. Magic Isle, a fantasy economic simulation—\$7.95. Sci-Fi sampler, 3 games—\$5.95. Space Colony—\$7.95. TRS-80 Demo Program—\$5.95. All include manuals. 20% off for 3 or more. SASE for game list. Tim Quinlan, 219 Washington Ave., Chelsea MA 02150.

We had replacement panels made for our Altair 8800s. They're blue against a white background and really look nice! We'll sell the extras for \$16 each. D. L. Tibbetts, 520 Schoolhouse Ln., Willow Grove PA 19090.

IMP-16 Owners—Complete floating point package. Arithmetic, long shifts, DP integer and floating compare, I/O and 10 important functions—LN, EXP, X**Y, etc. Diskette or paper tape, operators manual and documentation. \$100. T. Van Sickle, PO Box 556, Brighton MI 48116.

TRS-80 Electronic design software. Active filter design; low, high, and bandpass, Level-1, 4K cassette, \$9.50. Other tapes available, list \$1. J and J Hansen, 6890 50th St., San Diego CA 92120.

For sale: Heath H8, 16K, H9, cassette, up & run, \$1200. David Marcus 430 Wolf Hill Rd., Dix Hills NY 11746. (516) 427-1926.

TRS-80 OWNERS!! Original software including business system for Amway Distributors. Level I & II versions available. All will run in 4K. Also have moving signboard machine-language program. Write for info. Allan E. Sitter, 8 Driftwood Circle, Groton CT 06340.

Amortization for TI 59 with PC100a printer. Good annotation. Includes Pmt. #, interest, principal, new bal. Send \$5 plus magnetic card. George, PO Box 1576, Bakersfield CA

TRS-80, PET & Apple II reference list of software on cassettes. Published in Aug. and every 3 months. Cost is \$1 to North America and \$2 elsewhere. Robert Purser, Box 466, El Dorado CA 95623.

Programs For: SOL, SOL BASIC 8, North Star BASIC, SOL/North Star. Super DOS, Personalized, DOS for SOL, \$5. Bomb, Suspense Game, \$4. Star-Ship Trainer, \$4. Convert, \$2.50. Octal/Hex Loader, \$3. Plus Many More!! Above are listings. For cassette add \$2.50, Mini-disk, \$5.25. Send for complete list to: Pete Pacione, 2952 N. Meade, Chicago IL 60634.

Motorola D2 Users: A manual of assembly-language problems. Step-by-step approach of 6800 instructions, digital input/output, interrupts and many programming techniques, \$5. K. Rao, Department of Physics, Western Michigan University, Kalamazoo MI 49008.

TRS-80 Monthly Newsletter. For information write to: Howard Y. Gosman, Box 149, New City NY 10956.

*Books of computer games in BASIC. ENIGMAS-1 (\$8): Gone Fishing, Concentration, Starship, Craps, Slot-Machine, Sherlock Holmes, Tank Attack. ENIGMAS-2 (\$8): Number Guess, Mortar Battle, In-Between, Shell Game, Safari, Starship-2, Dice Roll, Puzzle. *Catalog and test program Frog Race, \$.50. Available in Standard BASIC. SWTP 8K BASIC or Radio Shack TRS-80 BASIC. Please specify. B. Erickson, PO Box 11099, Chicago IL 60611

TRS-80 Software: Business programs written in 16K Level II. Available for cassette or disk files. Send for list & prices. L. Owens, Rt. 6, Box 336A, Thomasville GA 31792.

For sale: Apple-II Software-cassette: Author-Title Index program for books, records, tapes, super-fast mach. lang. sort, 16K Blackjack, graphic, paddle input, sound, full L. V. rules, auto-play by computer, \$10 each incl. doc. Both for \$15. George W. Lee, 18803 S. Christina Ave., Cerritos CA 90701.

PET Owners: A craps program loaded with features like animated dice, lowercase literals, statistical analysis with bar graph and much more. 265 lines, 5K bytes; on tape and ready to roll. Send \$7.50 to Richard Liebert. PO Box 268, Scarborough Station NY 10510

TRS-80 machine language routines to write cassettes which will load using CLOAD, T-BUG, RSM-1, or other monitors. Complete listings and instructions. Send \$3.95 to Gene Perkins, 5224 Winifred, Ft. Worth TX 76133.

PET Owners: Send for free catalog of PET software. Custom programming available. C. M. Stuart, 5115 Menefee Dr., Dallas TX 75227.

For sale: Heathkit Computer System—H8 computer, H8-1 memory board (4K), H8-3 chip set (4K), H8-5 serial I/O & cassette interface (1 or 2 recorders), H8-2 parallel interface, ECP-3801 cassette recorder, H9 video terminal. Assembled and working: asking \$1500. Thomas C. Smith, 506 19th Lane, Vero Beach FL 32960. (305) 569-4622 after 6 PM

Heath: cassettes—Listings—Time—Trek— Day—Convert Nos—Backgammon. BASIC LIBRARY. (401) 331-5034 or (401) 738-3265.

TRS-80 Music generation program; no hardware needed. Cassette (Level I and II) and instructions, \$9.95. Write: D. Palmer, 815 Ky Ave., Lynn Haven FL 32444.

TRS-80 Level II, 16K. Star Trek game that runs in Level II, \$5.95. Other games SASE. J. Joyce, 5925 Rockhill Rd., Kansas City MO 64110.

All prime, 100% guaranteed, in tubes. CD4030—25/\$7.50, CA3079—25/\$12, 74S112—25/\$10, 74116—15/\$15. A. Khan, 2355 Burch Cir. N.E., Atlanta GA 30319.

TRS-80 software for small-fries. Flash Cards, a math game for kids 8 yrs. and older. Hi-Lo for 2, for kids who can count to 100. \$4 ea. or both on same cassette for \$7. Jim Creasy, 517 Reeves Dr., Phoenixville PA 19460.

TRS-80 software on cassette or diskette. Lowest cost. Free newsletter. Poi Pow, 96 Dothan St., Arlington MA 02174.


PET users need info? Getting started with your PET workbook, \$4. Workbook has helpful info, sample programs, exercises and fundamental features of PET BASIC. Send SASE for details. D. Smith, Box 921, Los Alamos NM 87544.

SWTP new AC-30 cassette interface, assembled, documented: \$75. GT-6144 graphic system, assembled, documented: \$79. MP-L parallel interface, assembled: \$25 with GT-6144. D. O'Hair, Box 17-8135, San Diego CA 92117.

CIRCLE CHESS instruction book by Alphonso, used in Circle Chess software development. \$5, Stanonis, Box 63, Des Plaines IL 60017.

TRS-80 Programming Contest—Win \$500— Send self-addressed stamped envelope to: TRS-80 P.C.-K, PO Box 621, Fenton MO 63026

Use the Classifieds

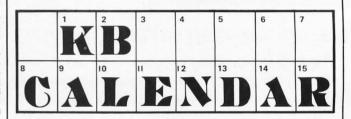

ComputerLand

ComputerLand Corp. will celebrate the shared success of its stores, customers and friends during a 2nd year birthday, Sept. 3 and 23 at all ComputerLand locations (growing at 1 a week, with operations recently expanded into Europe). Everyone is invited.

Washington DC

COMPCON FALL '78, sponsored by IEEE Computer Society, is being held in Washington DC, September 5-8, 1978, at the Capital Hilton. For a copy of the advance program, write to: COMPCON FALL '78, PO Box 639-g, Silver Spring MD 20901.

Dallas TX

International Microcomputer Exposition, Dallas—Sept. 29-30-Oct. 1, 1978. Dallas Convention Center, 413 Carillon Tower, 3601 Preston Rd., Dallas 75240, (214) 271-9311.

Boston MA

The Boston Computer Society presents "Home/Business Computers '78... An exposition of the state of the art in microcomputers." at Sherman Union, Boston University, 775 Commonwealth Ave., 10 AM to 5 PM on October 7, 1978. For more information call 884-7291 or write: The Boston Computer Society, 17 Chestnut Street, Boston MA 02108.

• Over 250 Exhibit Spaces

- Internationally Recognized Speakers
- Held in the VAST Dallas Convention Center
- Special Programs for Dealers Only

Dallas-Sept. 29-30-Oct.1,1978

EXHIBITORS (AS OF JUNE 10)

ADVANCED COMPUTER PRODUCTS, ALPHA MICRO SYSTEMS, APPLE, AP-PLIED DATA COMMUNICATIONS, AXIOM BYTE SHOP OF DALLAS, CAPITAL EQUIPMENT BROKERS, CENTRONICS, COMPUCOLOR CORP., COMPUTER HEAD-ROOMERS COMPUTER COMPUTER SHOP, DALLAS COMPUTER CENTER, DATA GENERAL CORP., DE-CISION DATA COMPUTER CORP., DIGITAL EQUIPMENT CORP., DIGITAL RESEARCH CORP., DILITHIUM PRESS, DIVERSIFIED TECHNOLOGY, D.P. SERVICES; ELECTRONIC DATA SYSTEMS (EDS), FINANCIAL COMPUTER CORP., FOUNDATION FOR QUALITY EDUCATION, GENERAL ELECTRIC, GIMIX, INC., GODBOUT ELECTRONICS, HOBBY WORLD ELECTRONICS, INONICS, HUBBY WOHLD ELECTHONICS, IMSAI, ITHACA AUDIO, JADE COMPUTER PRODUCTS; K A ELECTRONICS, METRO-PLEX DATA SYSTEMS, INC., MICRO AGE, MICRO DIVERSION, INC., MICROPOLIS CORP., MIDWEST SCIENTIFIC INST., MITS. ATES, PAGE DIGITAL ELECTRONICS, PER-TEC MICRO SYSTEMS, PERCOM DATA CORP., PRIME SUPPLY, INC., PROBLEM SOLVER SYSTEMS, O M DATA SERVICE; QUALITY COMPONENTS, QUEST ELECTRONICS, RADIO HUT, S D SYSTEMS, SCHWEBER ELECTRONICS CORP., SEALS ELECTRONICS, INC. SMOKE SIGNAL BROADCASTING, SOUTHWEST FEDER-ATION OF COMPUTER CLUBS, SOUTH-WEST TECHNICAL PRODUCTS, SPACE BYTE; SUMMAGRAPHICS CORP., SYBEX, INC., SYNERTEK, TANDY CORP., TECHNO CORP., TEKTRONIX INDUSTRIES, TELPAR, INC., TEXAS INSTRUMENTS, 3M COM-PANY, V R I; VANGUARD SYSTEMS CORP. VECTOR GRAPHICS, INC., WEST & AS-SOCIATES, XEROX CORP., ZITEX CORP.

SEE TOMORROW TODAY!

INDIRE DATA STSTEMS, LOUS, FINANCE COMPUTER CORP., FOUNDATION FOR QUALITY EDUCATION, GENERAL ELECTRIC, GIMIX, INC., GODBOUT ELECTRONICS, HOBBY WORLD ELECTRONICS, METRO-PLEX DATA SYSTEMS, INC., MICRO AGE, MICRO DIVERSION, INC., MICRO AGE, MICRO DIVERSION, INC., MICROPOLIS CORP., MIDWEST SCIENTIFIC INST., MITS., MOSTEK, MOTOROLA SEMICONDUCTOR, NOAKES DATA COMMUNICATIONS, NORTH TEXAS COMPUTER CLUB, O K MACHINE & TOOL, OSBORNE & ASSOCIATES, PAGE DIGITAL ELECTRONICS, PERTEC MICRO SYSTEMS, PERCOM DATA CORP., PRIME SUPPLY, INC., PROBLEM SOLVER SYSTEMS, O M DATA SERVICE; QUALITY COMPONENTS, QUEST ELECTRONICS, RADIO HUT, S D SYSTEMS, SCHWEBER ELECTRONICS CORP., SEALS ELECTRONICS, INC. SMOKE SIGNAL RROADCASTING. SOLUTHWEST FEDER-

SPEAKERS

CAROL OGDIN (SOFTWARE TECH-NIQUES), DR. ADAM OSBORNE (OS-BORNE & ASSOCIATES), WAYNE GREEN, (KILOBAUD MAGAZINE), CHRIS MORGAN (BYTE MAGAZINE) BOB JONES (INTER-FACE AGE), ZACH BOVINETTE (INTER-FACE AGE), ZACH BOVINETTE (INTER-FACE AGE), STEVE MURTHA (D/A ASSOCIATES), ELLIOT MAC LENNAN (MAC LENNAN & LILLIE), ASTRONAUT (NASA), HAROLD MAUCH (PERCOM DATA), ELIZABETH JACKSON (SOFT-WARE TECHNIQUES), BOB ELDRIDGE (DIGITAL EQUIPMENT CORP.), RODNEY ZAKS (SYEEY), DE EMERSON REDONEY ZAKS (SYBEX), DR. EMERSON BROOKS, (E SYSTEMS), R. NEIL FERGUSON (MOORE BUSINESS FORMS), GEORGE NELSON (MOTOROLA), BEN PEEK (BEN PEEK, INC.), STEVE EDELMAN (ITHACA AUDIO), BILL GODBOUT (GODBOUT ELECTRONICS), JOHN E. HOWLAND (VANGUARD SYSTEMS CORP.), MITCH GOOZE' (MOTOROLA SEMICONDUCTOR PRODUCTS, INC.), BOB FULLER (TEXAS INSTRUMENTS), PHILLIPE de MARCHIN (FAIRCHILD), DAVID AHL (CREATIVE COMPUTING), S. PAL ASIJA (ASIJA LAW OFFICE), DR. THOMAS J. BLACK (SOLAR-STATE SYSTEMS), DANIEL D. HAMMOND (SD SYSTEMS), JOHN P. SMITH (SCHWE BER ELECTRONICS), GEORGE MORROW (THINKER TOYS), HOWARD FULMER (PARASITIC ENGINEERING), DR. RICHARD HODGES (U.T.D.), NORMAN REITZEL (FORMERLY DATAPOINT), DR. AARON H. KONSTAM (TRINITY UNIVERSITY), D.C. DEFFENBAUGH (HOME COMPUTER CEN-TER, INC.), HOWARD J. HILTON.

MAGAZINES EXHIBITING

COMPUTER DEALER, COMPUTER RETAILING, CREATIVE COMPUTING, INTERFACE AGE, KILOBAUD, POPULAR ELECTRONICS, RADIO ELECTRONICS, SMALL BUSINESS COMPUTER.

Keynote Address By Dr. Portia Isaacson

Special Dealer Program

Featured Seminar Speakers

| Name | Tit | ile | |
|-----------|-------|-----|---|
| Company | | | Advance Registration |
| Address | | | One Day Admission \$4 (at door \$6) Three Day Admission \$8 (at door \$10) |
| City | State | Zip | Seminar Admission \$15 |
| Telephone | | | Total |

tand Alone ASCII Kevboard Specific

BUFFERED 8 BIT (TRI-STATE LATCH) PARALLEL OUTPUT WITH VALID DATA SYNC PULSE AND LEVEL 20 MA OPTO-ISOLATED CURRENT LOOP, POLARITY INDEPENDENT

ANSI – COMPATIBLE KEY SET; FOR SLIM-LINE "HIDEAWAY" PACKAGING SEGMENTED SPACE BAR ALLOWS FAST MULTIPLE-SPACING WITHOUT

SINGLE +5 VOLT 300 MA (NOMINAL) POWER SUPPLY (REQUIRED) INDUSTRY STANDARD 2 KEY ROLLOVER ENCODER

公公公公


REPEAT KEY REPEATS AT CHARACTER RATE USER SELECTABLE UPPER CASE ONLY (KSR/ASR/33 REPLACEMENT) OR

UPPER/LOWER CASI

N T

公公

SIMULTANEOUS OUTPUTS AVAILABLE: THE ONLY ONE ON THE MARKET

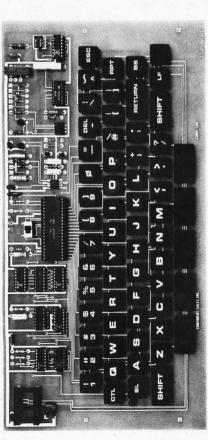

MASTERCHARGE ☆ VISA ☆ COD ☆ CHECK ☆ MONEY ORDER accepted by phone or mail

[415] 861-1345 C70 S N 94103 CA ALE FRANCISCO, Ø COMPONENT SAN

Plus \$3.00 handling charge. California residents add 61/2% sales tax.

AND

SSEMBLED

LOW PROFILE CASE (OPTIONAL) \$40.00

24 PIN DUAL – INLINE CONNECTOR

VISA

FACTORY SET AT 110 BAUD BUT EASILY ADJUSTED BY USER TO ANY BAUD RATE FROM 110 TO 9600 BAUD

LED INDICATOR FOR SHIFT-LOCK KEY ELIMINATES CASE UNCERTAINTY

A Great Microcomputer At A Fabulous **Price From Computer Enterprises:**

The VDP-40 **Video Data Processor**



Credit Card Price: \$4207.00

> Cash Discount Price: \$4046.00

Designed for the office or for the home, the IMSAI Video Data Processor, the VDP-40, places a microcomputer well within the budget of the average small businessman or systems developer. The VDP-40 may be used to computerize the accounting and inventory functions of a small business. The VDP-40 can communicate to additional VDP-40s or other 8080/85-based computers, and can act as a terminal in a data communications network.

The VDP-40 is a fully integrated system, featuring an 8085 microprocessor, 32K RAM memory, two 5¼-inch floppy disks, 9-inch CRT, heavy-duty power supply, professional keyboard, terminated/regulated motherboard, and serial and parallel I/O ports in a handsome cabinet.

The IMSAI VDP-40 comes fully assembled and tested. Built-in serial and parallel I/O ports provide the means to connect, via appropriate cabling, peripheral devices including line printers, modems and auxiliary terminals. Built-in expansion capability allows the user to increase the RAM, I/O ports and number of disk drives

SYSTEMS FEATURES.

- Fully Integrated Computing System in a single Cabinet

- High Speed 8085 Processor
 80 x 24 Video Display
 5¼-inch Twin Floppy Disk Drives
- Integrated CRT Display Microprocessor-Driven Keyboard With N-Key Rollover Terminated/Regulated Motherboard
- Heavy-Duty Power Supply Printer/Modem Port Included
- 32K RAM Memory Included
- 2K ROM Monitor Included
- Disk Expansion Capability in Excess of 4.5 Megabytes of On-Line Storage

System Expansion? Extra slots in our S-100 bus motherboard and our new power supply allow almost unlimited expansion.

Need more disk expansion? A controller option of the VDP-40 allows expansion to greater than 4.5 M Bytes

Add a line printer, an IBM compatible tape drive, a modem: all are available, with the interfaces and software to make it work for you.

NO-RISK GUARANTEE

- Cancellation With No Obligation If WE Don't Deliver In 90
- Days Full Satisfaction Or You May Return Product
- Plus All Manufacturers' Factory Guarantees

Shipping charges: \$10 per CPU on larger units; \$1.50 per kit. \$2.00 min.

Shipping charges, 310 pc.

Delivery is stock to 30 days on most items. Shipment is immediate for payment by eashier's check, money order or charge card. Allow 3 weeks for personal checks to clear. N.Y. State residents add approp. sales tax. Availability, prices and specs may change without notice.

Operating Hours M-W 10-5 E.S.T. Th-F 10-9 E.S.T.

P.O. Box 71 Fayetteville, N.Y. 13066

Phone (315) 637-6208 Today!

An advanced desktop data center for \$1.995? Quitcherkiddin*, TANO.

No Kiddin'.

OUTPOST /



Rugged unit • Full ASCII keyboard • 24x80 character CRT • 32K bytes RAM • M6800 CPU . Mini-floppy disk drive and controller • BASIC software package • Over 20 Applications packages available . User documentation.

DEALER INOURIES

| HAALLED |
|---|
| Send meOrder Form Send meOutpost 11's. Deposit \$200 each, plus \$35 freight and insurance. (Pay balance on delivery.) Name |
| Firm/Title |
| Shipping Address |
| Phone |
| Signature |
| Mail to: |
| TANO 137 |

Corporation 4521 W. Napoleon Avenue Metairie, La. 70001 (504) 888-4884 TWX 810-591-5229

VIDEO TERMINAL

Now, a completely self-contained video terminal card for less than \$150.00. Requires only an ASCII Keyboard and TV set to become a complete interactive terminal for connection to your computes serial IO port. Two units available, common features are: single 5V supply, crystal controlled sync and baud rates to 9600 baudt, computer and keyboard operated cursor control, partly error and control, power on initialization, forward spaces, line feed, rev. Line feeds, home, return cursor, and clear to end of line. Power requirements are 5V at 900ma, output std. IV p.p. video and serial TTL level data.

TH3216 Features: Display

32 characters by 16 lines 2 pages

TH6416 64 characters by 16 lines scrolling

Upper case ASCII Characters

Upper/lower case optional

Baud Rates Controls

300-9600 Read to/from

110-9600 Scroll up or down


memory \$149.95

\$189.95

Price (kit) Above prices include all IC sockets

OPTIONS:

Power supply (mounts on board) \$14.95 Video/RF Modulator, VD-1 6.95 Lower case option (TH6416 only) 14.95 Assembled, tested units, add 60.00

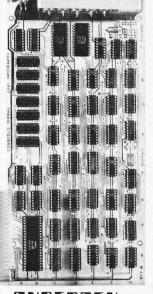

GURERNEN

Frequency Counter \$89.95 KIT

You've requested it, and now it's here! The CT-50 Frequency Counter Kit has more leatures than counters selling for twice the price. Measuring frequency is now as easy as pushing a button, the CT-50 will automatically place the declinal point in all modes, giving you quick, reliable readings. Want to use the CT-50 mobile? No problem, it runs equally as well on 12 VDC as it does on 110 VAC. Want super accuracy? The CT-50 uses the popular IV color burst freq. of 379545 MHz for time base. Tap off a color TV with our adapter and get ultra accuracy—0.01 ppm 11 he CT-50 ofters professional quality at the unheard of price of \$89.95. Order yours today!



SPECIFICATIONS

Sensitivity less than 25MV Frequency range. 54t z 60VMHz, typically 65MHz Gate time 1 second, 110 second, with automatic cecimal point positioning on both direct and prescale Display, 8 digit red LEO. 4 neight. Accuracy, 2 ppm. 001 ppm with 170 time base! Input. BNC, 1 mag ohm direct, 50 hm with prescale option Power. 110 VAC 5 walts or 12 VDC a, 44 mp. Size. Appro. 6 x 4 x 2 high quality alumnum case

PRICES

CT-50, 60 MHz Counter Kit.....\$89.95 CT-50WT, 60 MHz counter, wired and tested....\$159.95 CT-600, 600 MHz prescaler option for CT-50, add. . \$29.95

VIDEO TO RE **MODULATOR**

Convert any TV set to a video monitor. Super stable circuit is glitch-free, tunable over channels 4-6. Runs on 5-15V. Recommended by many computer manufactur-ers. Std. video input. Com-plete kit, VD-1 \$6.95

741 OP-AMP MINI DIP 10/\$2.00

LINEAR REGS TRANSISTORS

309K 99 340K-12 99 7805 99 7812 99 NPN 2N3904 type PNP 2N3906 type NPN Power Tab 40W 555 556 10/\$1.00 566 567 1.49 3/\$1.00 1.49 1.49 .49 1.49 PNP Power Tab 40W FET MPF-102 type 3/\$1.00 324 1458 380 78MG 723 1.50 UJT 2N2646 type 2N3055 NPN Power 3/\$2.00 75

RS232/TTL TTL/RS232 Converter kit Complete kit \$7.95

IC SOCKETS low profile low profile low profile low profile wire wrap 5/\$1.00 5/\$1.00 5/\$1.00 2/\$1.00 3/\$1.00 8 pin 14 pin 16 pin 40 pin 14 pin

MINI-KITS

FM WIRELESS MIKE KIT

Transmit up to 300' to any FM radio. Sensitive mike input requires dynamic, crystal or cer ic mike. Runs on 3 to 9 volts.

TONE DECODER KIT

A complete lone decoder on a single PC Board. Features: 400 to 5000 Hz adjustable frequency range, voltage regulation: 557 CC Useful for louch-tone decoding: tone thirst detection. FSK demod, signaling, and many other uses Use 7 for 12 button touchtone decoding. Buns on 5 to 12 volts.

Complete Kit, TD-1...\$4.95

LED

BLINKY KIT great attention get r which alternately ishes 2 jumbo LEDs se for name badges Complete Kit. BL-1 .



SUPER-SNOOP AMPLIFIER

A super-sensifive amplifier whice up a pin drop at 15 feet! Great for baby's room or as a general puamplifier. Full 2 walts of output. If 2 volts, uses any type of mike. Re ohm speaker. Complete Kit, BN-9 \$4.95

MUSIC LIGHTS KIT

See music come alive! 3 different lights flicker with music or voice. One light for lows, one for the mid-range and one for the highs. Each channel individually adjustable, and drives up to 300 watts. Great for parties, band music, nite clubs and more.

SIREN KIT

es upward and downward wail char-c of police siren. 200mw audio out-ns on 3-9 volts, uses 8-45 ohm Complete Kit. SM-3 \$2.95

POWER SUPPLY KIT Complete triple regulated power supply provides variable ±15 volts at 200ma and +5 volts at 1 amp. 50mv load regulation, good filtering and small size. Kit less transformers Requires 6-80 vs. 1 amp and 18 to 30VCT.

Complete Kit, PS-3LT....\$6.95

ramsey electronics

Box 4072K ROCHESTER NY 14610 (716) 271-6487

*Quit your kidding

WIREWRAP

PRECUT WIRE

Why buy wire on rolls? PRECUT & STRIPPED WIRE IS:

Fast - No more cutting & stripping by hand Rellable - Good, clean, uniform strip Economical - Cheaper than using bulk wire

| Precut Wire | Bulk Wire |
|---|--|
| 100 pcs of 3" at \$.82 = 3\%\elleft. 100 pcs of 6" at 1.06 = 2\elleft. Wire Kit 1 at \$6.95 = 2 1/3\elleft. | 50 ft roll at \$1.99 = 4¢/ft 100 ft. roll at 2.95 = 3¢/ft |
| | |

| | tripped 1" on | | | |
|-------------|----------------|-----------|------------|-----------|
| | Blue, Green, Y | | | |
| Wire packag | ed in plastic | bags. Add | 25¢/length | for tubes |
| | 100 | 500 | 1000 | 5000 |
| 2½ in. | .78 | 2.40 | 4.30/K | 3.89/K |
| 3 in. | .82 | 2.60 | 4.71/K | 4.22/K |
| 31/2 in. | .86 | 2.80 | 5.12/K | 4.55/K |
| 4 in. | .90 | 3.00 | 5.52/K | 4.88/K |
| 4% in. | .94 | 3.21 | 5.93/K | 5.21/K |
| 5 in. | .98 | 3.42 | 6.34/K | 5.52/K |
| 51/2 in. | 1.02 | 3.65 | 6.75/K | 5.86/K |
| 6 in. | 1.06 | 3.85 | 7.16/K | 6.19/K |
| 6½ in. | 1.15 | 4.05 | 7.57/K | 6.52/K |
| 7 in | 1.20 | 4.25 | 7.98/K | 6.85/K |
| 71/2 in. | 1.25 | 4.45 | 8.39/K | 7.18/K |
| 8 in. | 1.29 | 4.65 | 8.80/K | 7.53/K |
| 8% in. | 1.32 | 4.85 | 9.21/K | 7.84/K |

WIRE KITS

| #1 | \$6.95 | |
|----|--------|--|
| | 40.00 | |

| 250 | 3" | 100 | 4½" 5" 6" | 250 | 21/:" | 250 | 4%" | 250 | 6" |
|-----|------|-----|-----------------|-----|-------|-----|--------|------|------|
| 250 | 315" | 100 | 5" | 500 | 3" | 250 | 5" | 100 | 615" |
| 100 | 4" | 100 | 6" | 500 | 31/2" | 100 | 51/5" | 100 | 7" |
| | | | | 500 | 4" | 1 | 250 ft | Roll | Bulk |

#2 \$19.95

Choose One Color or Assortment

WIRE WRAP SOCKETS 25-99 100-249 250-999 1K-5M 35 31 29 27 .32 .30 .28 .27 .34 .32 .30 .29 10-24

Gold 3-level Closed Entry Sockets

End & Side Stackable

All prices include gold

2-level sockets available

WIRE WRAP TOOLS



INTERCONNECT CABLES

cable connectors for connecting boards to front panels, or board to board

| | SII | SINGLE ENDED | | | DOUBLE END | | |
|-----|--------|--------------|--------|--------|------------|--------|--|
| | 14 pin | 16 pin | 24 pin | 14 pin | 16 pin | 24 pin | |
| 6" | 1.24 | 1.34 | 2.05 | 2.24 | 2.45 | 3.37 | |
| 12" | 1.33 | 1.44 | 2.24 | 2.33 | 2.55 | 3.92 | |
| 24" | 1.52 | 1 65 | 2 63 | 2.52 | 2.76 | 4.31 | |
| 48" | 1.91 | 2.06 | 3.40 | 2.91 | 3 17 | 5.08 | |

PAGE DIGITAL ELECTRONICS P36

135 E. Chestnut St. Suite #5 Monrovia, California 91016 Phone (213) 357-5005

Ordering Information:

- Orders under \$25 and COD's, add \$2
- All others, shipped Ppd in U.S. via UPS For Blue Label (Air) or 1st Class, add \$1 We accept Visa & Mastercharge Most orders shipped same day
- - Dealer Inquiries Invited

8K BASIC for KIM-1

The famous high speed Microsoft BASIC is now available for KIM-1. The 9-digit accuracy version is available on cassette or paper tape.

DELIVERY FROM STOCK.

\$99.00

\$2.00 shipping and handling



P.O. BOX 523 MEDINA, OHIO 44256

(216) 725-4560

NEW SOFTWARE AVAILABLE FOR

NORTH STAR * COMPUTERS

The following software is now being offered for use on the North Star disk systems and Horizon Computers.

| CP/M™ FDOS and Utilities | | From \$145 |
|------------------------------------|-----------|------------|
| Microsoft FORTRAN-80 | | \$400 |
| Microsoft COBOL-80 | | \$625 |
| Microsoft Disk Extended BASIC | | \$300 |
| Xitan SUPER BASIC | (A3) | \$99 |
| Xitan DISK BASIC | (A3+) | \$159 |
| Xitan Z-TEL Text Editor | (A3, A3+) | \$69 |
| Xitan Text Output Processor | (A3, A3+) | N/A |
| Xitan Macro ASSEMBLER | (A3, A3+) | \$69 |
| Xitan Z-BUG | (A3+) | \$89 |
| Xitan LINKER | (A3+) | \$69 |
| Xitan Package A3 (as keyed above) | | \$249 |
| Xitan Package A3+ (as keyed above) | | \$409 |
| Xitan Fortran IV | | \$349 |
| CBASIC Compiler/Interpreter BASIC | | \$95 |
| MAC Macro Assembler | | \$100 |
| SID Symbolic Instruction Debugger | | \$85 |
| TEX Text Formatter | | \$85 |
| BASIC-E Compiler/Interpreter BASIC | | \$30 |
| Accounts Receivable | | \$750 |
| NAD Name & Address Processor | | \$79 |
| QSORT Disk File Sort/Merge Utility | | \$95 |

Available from computer stores nationwide or order direct from:

LIFEBOAT ASSOCIATES

164 W. 83rd Street New York, N.Y. 10024 (212) 580-0082

L16



SPACE AGE COMPUTER STORE

NEW YORK CITY and LONG ISLAND

IF YOU WANT PROFESSIONAL SERVICE IN A CASUAL ATMOSPHERE AND A LARGE VARIETY OF EQUIPMENT

BUSINESS APPLICATIONS

General Ledger, Inventory, Accounts Payable, Accounts Receivable, Word Processing Systems.

GENERAL APPLICATIONS

Northstar Macro Assembler \$65 Northstar Mailing Label Program\$45

• STOCK MARKET PACKAGE (Unique) Makes Makes Ticker-Tape Obsolete.

Send \$2.00 for descriptive brochure on Stock Market Package.


BYTE SHOP B14

THE AFFORDABLE COMPUTER STORE T.M.

Saturday 10 to 5 - - - - 10 to 5

130 East 40th Street New York, NY 10016 (212) 889-4204 (Corner Lexington Avenue)

2721 Hempstead Turnpike Levittown, NY 11756 (516) 731-8116 (Just East of Wantagh Pkwy)

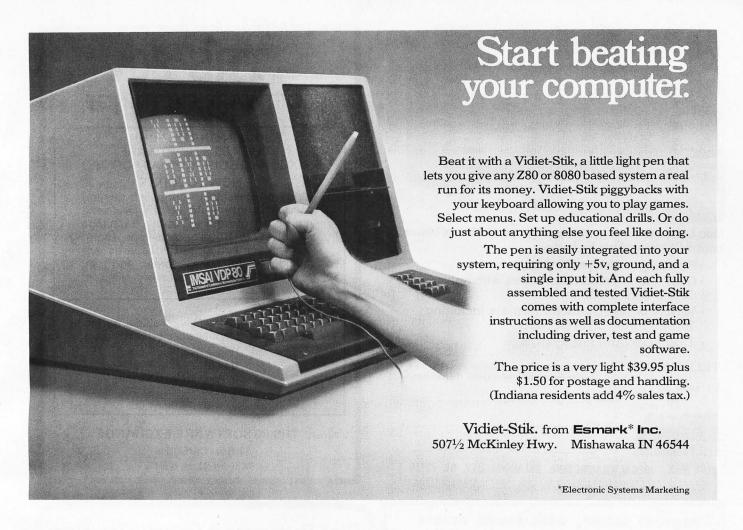



IBM® Selectric-Based I/O Writers Excellent Hobby Printers

Series 72/731 Heavy Duty 8½" Platten

All Solenoids Original Documentation While Supply Lasts

SUPER SALE

These terminals are from a large airline reservation system. They are heavy duty and were under continuous maintenance. The units have been in storage. We make every effort to ensure that all essential parts are included. Most work when plugged in. No warranties are given or implied.

Conversion Kits.

1. Conversion instructons, P C board for printer only using software approach \$59.95
2. I/O kit makes the unit into a conversational terminal. Instructions, P C board, components for a parallel or RS232 interface. Will work with any IBM terminal \$249.95
3. Completely converted unit and assembled interface for I/O using kit \$999.95

Card reader by HP with RS232 interface \$299.95
Printec line printers, parallel interface \$1500.00
Honeywell 516 & 316 mini's, make offer. Cables, used 11
conductor, 100 ft with connectors \$9.99
Electronic parts and circuit boards 1/4 lb bag \$4.99

Check, Money Order, Cash. Personal checks require 3 weeks to clear. No COD's. Units shipped UPS or PP collect. Prices Net FOB Tulsa

SUPER SURPLUS SALESP.O. BOX 45944 TULSA, OK 74145 1-918-622-1058



Don Lancaster's ingenius design provides software controllable options including:

- Scrolling Full performance cursor
- Over 2K on-screen characters with only 3MHz bandwidth
- Variety of line/character formats including 16/32, 16/64 even 32/64
- · User selectable line lengths

| TELL ME MOR | | | | or the TVT-6 Kits. \$1 enclosed. |
|--------------------|-----------|-----------|-------------|----------------------------------|
| P9 | Name: _ | | | |
| FASA | Address: | - Total | | |
| ELECTRONICS, INC. | City: | 412/6 | State: | Zip: |
| DEPT. 6-K , 1020 W | V. WILSHI | RE BLVD., | OKLAHOMA CI | TY, OK 73116 |

Program faster, with fewer errors

Save time, save money, have more fun when you write programs in BASIC on our new combination Program Coding/CRT Layout Sheets.

Gives you 2 form uses for the price of one. Use full 28 line x 80 column grid area for regular program steps. To plan display layouts, simply keep your characters within the appropriate CRT indicator lines, and you'll auto-

matically see where they'll be on your CRT screen.

Gives you 4 extra coding lines on every sheet. Full 28 line x 80 column coding capacity saves you 14 sheets out of every 100, compared to 24-line forms, yet we offer full-size 6mm x 3mm grid blocks.

Works with your CRT display, no matter what brand you own. Equipped for both 16 line x 64 column and 24 line x 80 column display formats.

Surface-engineered to take both pen & pencil without blotching. Gives you crisp, sharp characters whether you write with pencil or plastic-tip pens.

Eye-comfortable soft blue grid. All grid rulings, tints, and division rules are easy on your eyes, even after hours of continuous programming.

Bright white sheet makes your characters easy to read. Heavy 22-pound brilliant white opaque paper gives your writing contrast.

8½ x 11 size saves you money. . .fits standard binders, folders, & files. Designed to serve professional programmers, hobbyists, and small business people economically.

Your choice of looseleaf style or 50-sheet pads. Both are 3-hole-punched. The choice is yours.

Try a pack today. Ask your local computer store for Stirling/Bekdorf 78C1's. Or use the coupon below to get them right now.

| | Rush me the quantity of 78C1 BASIC Coding/CRT Layou dicated below: | ıt Sheets |
|--------|---|-----------|
| | Looseleaf Pads | |
| | \square 100 = \$6.05 + \$1.50 shpg. \square two 50-sht. pads: \$6.35 + \$1.50 shpg. \square 500 = \$24.10 + \$2.85 shpg. \square ten 50-sht. pads: \$26.85 + \$2.85 shpg. | |
| Enclos | sed is my check for \$ e to: □ Master Charge; □Visa Card # | |
| | | |
| Name_ | | |
| | | |

Stirling/Bekdorf #

K9 4407 Parkwood - San Antonio, TX 78218 - (512) 824-5643

TRE-BO TRE-BO TRE-BO TRE-BO TRE-BO TRE-BO TRE-BO

TRS-80

SOFTWARE EXCHANGE

JOIN IN ON THE FUN!!!! THE TRS-80 SOFTWARE EXCHANGE CIRCUIT HAS FORMED

HOW TO JOIN

Send (on cassette) your best general interest program. In return, we send you one of our Circuit Exchange Cassettes (6-10 programs per tape). Programs meeting our standards are considered for retail sales, and you receive commissions on every program sold.

NOTE: Looking for quality material for projected newsletter. Interested parties contact:

Roger Robitalle Box 61 Milford, New Hampshire 03055


Write: TRS-80 SOFTWARE EXCHANGE

17 Briar Cliff Drive Milford, N. H. 03055

LI DO-ENI DO-ENI DO-ENI D

T38

High Performance Cassette Interface



For SWTPC Computers

- FAST 4800 Baud Loads 4K in 8 Seconds!
- RELIABLE Error Rate Less Than 1 in 10⁶ BYTES.
- CONVENIENT Plugs Directly Into The SWTPC Motherboard.
- LOW COST \$49.95 For Complete Kit.
- PLUS A Fully Buffered 8 Bit Output Port Is Also Provided.

The TC-3 Cassette Interface Records In A Modified FM Format Similar To Disk Systems. It Is Edge Sensitive And Immune To Phase Reversals In The Recorder.

"Designed By Professionals For Outstanding Performance"

JPC PRODUCTS CO. P.O. BOX 5615 ALBUQUERQUE, N.M. 87185 J12 Ship

Terms: Cash or MC Shipped Prepaid NM Residents Add 4% Tax.

HIGH QUALITY 6800 ACCESSORIES DESIGNED ESPECIALLY FOR THE HOBBYIST:

- DS-68 Digisector the first high resolution video digitizer that allows the computer random access to the brightness of any point in a TV picture, economically priced for the hobbyist. \$169.95
- PSB-08 PROM System Board allows movement of the I/O portion of memory to any location in the SWTPC memory. You can have up to 56K bytes of contiguous RAM! \$119.95
- B-08 2708 EPROM Programmer generates all programming voltages on board. Programs EPROMS to full manufacturer specifications. \$99.95
- UIO Universal I/O Board comes pre-wired for any Motorola 40 or 24 pin interface chips, maximizing available space for interface circuitry. \$24.95
- X-50/X-30 Extender Boards include a ground plane and ground test point, providing noise immunity and troubleshooting efficiency. \$29.95/\$22.95



BANKAMERICARD

P.O. BOX 1110 DEL MAR, CA. 92014 714-756-2687

DELTA electronics (617)267-5900

RTL

RTL

RTI

RTE

RN

RTL

PROFESSIONAL-PERSONAL (NEW) COMPOSITE VIDEO MONITORS..12" CRT, 14 MHZ, 110 OR 220 VAC, COMPACT, SIMULATED WALNUT-GRAINED CABINET ALL CONTROLS \$174.50 ON SIDE.

NEW ASCII KEYBOARDS.... MICRO-SWITCH (WITH DATA) 53 KEYS......\$49.50 (ALL TTY CODES)

78KEYS.....\$61.75 (PROFESSIONAL QUALITY)

B312 B314

B315

B316 B317 B318

B319

B320

B324

B325 B327

590 Commonwealth Ave. WE ACCEPT: VISA, BAC, MC, CHECKS, OR MONEY ORDERS...INCLUDE APPROX. 10% EXTRA FOR SHIP-PING/HANDLING CHARGES...EXCESS REFUNDED... Boston, MA 02215

> NEW EXECUTIVE KEYBOARDS ! 72 KEYS..SOME LIGHTED.. NON-ASCII, EASY TO PER-SONALIZE WITH AN ASCII ENCODER CHIP.SIMULATED WALNUT GRAINED, (MATCHES MONITOR)\$44.95

> > CRT MONITOR COMMERCIAL QUALITY SETCHELL CARLSON TTL.. INPUT, P39 OR P4..... PHOSPHOR. 18MHZ BAND-

VISIT US AT OUR NEW LOCATION IN BOSTON!! OVER 5000 ITEMS IN STOCK....



RECONDITIONED. COMMERCIAL RECONDITIONED, COMMERCIAL ACOUSTIC COUPLERS (RS232) FULL AND HALF DUPLEX.... 110-300 BAUD, TEST MODE.. CARRIER DETECT....\$169.50

PHONE OR MAIL ORDER (617) 267-5900



BURROUGHS (NEW) SELF-SCAN BURROUGHS (NEW) SELF-SCAN
ALPHA NUMERIC DISPLAYS...
16 CHARACTERS WITH 5X7 DOT
MATRIX..HIGH CONTRAST..112
COLUMN..WITH APPLICATION
DATA... \$79.50







| VOLTS | AMPS |
|-------|------|
| +5 | 4.0 |
| +5 | 10.5 |
| +5 | 12.6 |
| +5 | 13.0 |
| +5 | 16.0 |
| +5 | 20.0 |
| +5 | 31.0 |
| +5 | 24.0 |
| +5 | 32.5 |
| +5 | 74.0 |
| +5 | 74.0 |
| +12 | 2.5 |
| +12 | 5.0 |
| +12 | 7.3 |
| +12 | 10.0 |
| +12 | 10.5 |
| +12 | 16.0 |

 $\underline{P} \ \underline{O} \ \underline{W} \ \underline{E} \ \underline{R} \quad \underline{S} \ \underline{U} \ \underline{P} \ \underline{P} \ \underline{L} \ \underline{Y} \quad \underline{S} \ \underline{P} \ \underline{E} \ \underline{C} \ \underline{I} \ \underline{A} \ \underline{L} \ \underline{S}! ! ! !$ NOTE: STOCK # PRICE VOLTS AMPS RTL B302 \$55 \$65

\$62

\$82

\$95

\$138

\$198

\$198 \$198 \$21 \$38 \$44 \$75 \$65

......

.....

+12 +15 +6 26.5 9.5 5.0 B330 +13.5KV . 31MA 5356 +10 TO +20 1.5 +90 1.0 RNPV 5311 5154 +24 X N RNEH 150 +12,-12 -36 1.0 +4.6 T06.8 0-70 +12 T0 +15 .4

R = REGULATED X = UNREGULATED N = NEW-GUARANTEED T = TESTED & GUARANTEED

\$48 \$137 B338 B339 \$195 \$23 VARIABLE 220 VAC LAMBDA (MFR) NORTH ELECTRIC (MFR) POWER MATE (MFR)

\$14

\$25

\$14

NOTES: STOCK #

RECONDITIONED/GUARANTEED \$385 RECONDITIONED/GUARANTEED \$575 RECONDITIONED/GUARANTEED \$395 CA".... FAST RISE "L" PLUG-IN NEW PRECISION JOY STICKS WITH 4 100K POTS 2 FOR\$9.50

NEW EKG STRIP CHART RECORDER W/EVENT MARKER.... \$95 FACTORY RECONDITIONED TOUCH TONE PAY PHONES WITH KEYS

VISIT OUR NEW STORE AND MAIL ORDER WAREHOUSE NEAR KENMORE SQ., BOSTON.

WHEN PLACING ORDERS FOR POWER SUPPLIES, MAKE ALTERNATIVE CHOICES IF POSSIBLE...

NEW SOFTWARE AVAILABLE FOR ICROPΩLIS™

The following software is now being offered for use on the Micropolis MetaFloppy and MacroFloppy disk

| CP/M™ FDOS and Utilities | | From \$145 |
|------------------------------------|-----------|------------|
| Microsoft FORTRAN-80 | | \$400 |
| Microsoft COBOL-80 | | \$625 |
| Microsoft Disk Extended BASIC | | \$300 |
| Xitan SUPER BASIC | (A3) | \$99 |
| Xitan DISK BASIC | (A3+) | \$159 |
| Xitan Z-TEL Text Editor | (A3, A3+) | \$69 |
| Xitan Text Output Processor | (A3, A3+) | N/A |
| Xitan Macro ASSEMBLER | (A3, A3+) | \$69 |
| Xitan Z-BUG | (A3+) | \$89 |
| Xitan LINKER | (A3+) | \$69 |
| Xitan Package A3 (as keyed above) | | \$249 |
| Xitan Package A3+ (as keyed above) | | \$409 |
| Xitan Fortran IV | | \$349 |
| Xitan DATA BASE MANAGEMENT SY | STEM | \$1,250 |
| CBASIC Compiler/Interpreter BASIC | | \$95 |
| MAC Macro Assembler | | \$100 |
| SID Symbolic Instruction Debugger | | \$85 |
| TEX Text Formatter | | \$85 |
| BASIC-E Compiler/Interpreter BASIC | | \$30 |
| General Ledger | | \$995 |
| Accounts Receivable | | \$750 |
| NAD Name & Address Processor | | \$79 |
| QSORT Disk File Sort/Merge Utility | | \$95 |

Available from computer stores nationwide or order direct from:

> LIFEBOAT ASSOCIATES 164 W. 83rd Street New York, N.Y. 10024 (212) 580-0082 L16

WIREWRAP

PRECUT WIRE

Why buy wire on rolls? PRECUT & STRIPPED WIRE IS:

- Fast No more cutting & stripping by hand Reliable Good, clean, uniform strip Economical Cheaper than using bulk wire

| Precut Wire | | Bulk Wire |
|-------------|--|--|
| 100 pcs | of 3" at \$ 82 = 31/46/ft. of 6" at 1.06 = 26/ft. t 1 at \$6.95 = 2.1/36/ft. | 50 ft roll at \$1.99 = 4¢/ft 100 ft. roll at 2.95 = 3¢/ft |

30 Kynar stripped 1" on each end. Lengths are overall clors: Red,Blue,Green,Yellow,Black,Orange,White

| | 100 | 500 | 1000 | 5000 |
|-----------|------|------|---------|--------|
| 21/2 in | .78 | 2.40 | 4.30/K | 3.89/K |
| 3 in. | 82 | 2 60 | 4.71/K | 4.22/K |
| 31/4 in. | 86 | 2.80 | 5.12/K | 4.55/K |
| 4 in. | 90 | 3.00 | 5.52/K | 4.88/K |
| 4% in | .94 | 3.21 | 5.93/K | 5.21/K |
| 5 in | .98 | 3 42 | 6 34/K | 5.52/K |
| 5'4 in | 1.02 | 3.65 | 6.75/K | 5.86/K |
| 6 in | 1.06 | 3.85 | 7.16/K | 6.19/K |
| 6% in | 1.15 | 4.05 | 7.57/K | 6 52/K |
| 7 in | 1.20 | 4.25 | 7.98/K | 6.85/K |
| 7'5 in. | 1.25 | 4.45 | 8 39/K | 7.18/K |
| 8 in | 1.29 | 4.65 | 8 80/K | 7.53/K |
| 8'5 in. | 1.32 | 4.85 | 9.21/K | 7.84/K |
| 9 in. | 1.36 | 5.05 | 9.62/K | 8 17/K |
| 9'/2 in. | 1.40 | 5.25 | 10.03/K | 8.50/K |
| 10 in. | 1.45 | 5.51 | 10.44/K | 8.83/K |
| Addl. in. | 10 | 41 | 82/K | .66/K |

| 7.18/K 7.53/K | With Fre (\$6.95 V |
|------------------|-----------------------|
| 7.84/K 8.17/K | Batteries |

WIRE KITS

#2 \$19.95

| 250 | 3" | 100 | 4'5" | 250 | 21/2" | 250 | 4'7" | 250 | 6" |
|-----|------|-----|------|-----|-------|-----|--------|------|------|
| 250 | 3'5" | 100 | 5" | 500 | 3" | 250 | 5" | 100 | 6'2" |
| 100 | 4" | 100 | 6" | 500 | 31/2" | 100 | 515" | 100 | 7" |
| | | | | 500 | 4" | 1 | 250 ft | Roll | Bulk |

#1 \$6.95

PAGE DIGITAL ELECTRONICS P36

135 E. Chestnut St. Suite #5 Monrovia, California 91016 Phone (213) 357-5005

WIRE WRAP SOCKETS 10-24 25-99 100-249 250-999 1K-5K

| 8 pin* | 41 | .38 | 35 | .31 | .29 | .27 |
|----------|----------|-----------|-----------|-----------|-----------|--------|
| 14 pin* | .36 | .34 | .32 | .30 | .28 | .27 |
| 16 pin ' | .38 | .36 | .34 | .32 | .30 | .29 |
| 18 pin * | 63 | 58 | .54 | .47 | 44 | .41 |
| 20 pin | 84 | .78 | 71 | 63 | 59 | .54 |
| 22 pin * | .95 | .90 | .85 | .75 | .72 | .70 |
| 24 pin | 91 | .84 | 78 | .68 | .64 | 59 |
| 28 pin | 1.25 | 1.15 | 1.08 | 95 | .89 | 82 |
| 10 pin | 1.65 | 1.55 | 1.42 | 1.25 | 1 15 | 1.09 |
| | Gold | 3-level C | losed En | try Socke | ts | |
| End & | Side Sta | | sockets a | | es includ | e gold |
| | | | | | | |

WIRE WRAP TOOLS



s & Charger WSU 30 Hand Wrap-Unwrap Strip Tool WSU 30M, for Modified Wrap BT 30 Extra Bit

INTERCONNECT CABLES

bbon cable connectors for connecting boards to front panels, or board to board

| SINGLE ENDED | | DOUBLE ENDE | | | |
|--------------|--------|-------------|--------|--------|-------|
| 14 pin | 16 pin | 24 pin | 14 pin | 16 pin | 24 pi |
| 1.24 | 1 34 | 2 05 | 2.24 | 2.45 | 3.37 |
| 1.33 | 1.44 | 2.24 | 2.33 | 2.55 | 3.92 |
| 1.52 | 1 65 | 2 63 | 2.52 | 2.76 | 4.31 |
| 1.91 | 2.06 | 3.40 | 2.91 | 3 17 | 5.08 |
| | | | | | |

Ordering Information:

- Orders under \$25 and COD's, add \$2
- All others, shipped Ppd in U.S. via UPS For Blue Label (Air) or 1st Class, add \$1 We accept Visa & Mastercharge
- Most orders shipped same day

Dealer Inquiries Invited





COMPUTER P. O. BOX 523 MEDINA, OHIO 44256

8K EPROM

 4×2716 4K OR 8K MODES **DUAL 4K MODE** SOCKETED **EPROMS**

\$149.95 KIT

DATA **ACQUISITION**

32 CHANNELS 8 BIT 100μ SEC CONV. ±0.5% ACCURACY RANDOM CHANNEL **SELECT**

\$99.95 KIT

EPROM PROGRAMMER

4 × 2716 CAPACITY COPY MODE SINGLE/DUAL PROG. MODE 2 ZIF SOCKETS

\$49.95 KIT

WASATCH FEATURES

5 VOLTS • 44 PINS • 4.5" x 6.5" CARDS



SEMICONDUCTOR PRODUCTS

W13

25 SOUTH 300 EAST · SUITE 215 · SALT LAKE CITY, UTAH 84111 · 714/752-1374

NORTH STAR

DISK ASSEMBLER and **DISK EDITOR**

Both programs read and write disk files; file size not limited by memory. Assembler will assemble up to ten source files at a time; permits modular programming with programs easily relocated by reassembling at the desired address. Editor does not use line numbers; it searches for strings. Lines may be inserted, deleted and displayed. Large disk source files allow programs to be fully commented.

> ASSEMBLER/EDITOR on disk with users manual...\$30

COMPUTER SYSTEMS DESIGN

906 N. Main

Wichita, KS 67214

DEALERS INQUIRIES INVITED

LOW COST VIDEO TERMINAL



Shown with RCA 9" TV (Optional)

QUIETLY REPLACE THAT MECHANICAL TELEPRINTER

Connect it to any transformer powered B&W TV with a simple video input modification. Or, we can provide a popular brand 9" set with the necessary modifications that can still be used for TV reception.

- Finest quality long life keyboard with repeat
- 16 line by 64 character display
- Upper case ASCII character set
- Full performance cursor with dedicated keys
- Auto scroll, auto line feed, and auto return
- Switchable baud rate: 110 thru 2400
- Interface: both RS-232C and 20 mA current loop
- Quartz crystal timing
- Sturdy metal case

Fully assembled Video Terminal Modified 9" TV

\$350 \$100

(Available only with terminal) Call or write for additional information

MC and VISA


MICROTYPE INC. M50

ACCEPTED

404 E. Park, Plano, IL. 60545

(312) 552-7074

A VERY GRAPHIC **DEMONSTRATION:**

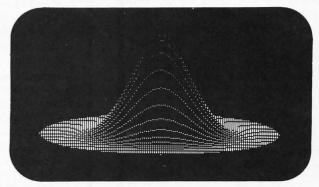

GDT-0 is a graphics card designed as a direct plug-in to the S-100 bus. It creates a one-to-one map between its 3K of completely addressable on-card memory and the generated high-resolution video display (128 H x 192 V). GDT-0 is easily programmed and can be used with BASIC as well as machine languages. Numerous programs are available, including universal- curve- and bargraph plotting, as well as programs for business applications. GDT-0 is available for immediate delivery, completely assembled and burned-in, for only \$235. Write for complete information.

DIVERSIFIED MICRO PRODUCTS CORPORATION

56 Sicker Road, Latham, New York 12110 518/783-0813



- 8v@15A, ±16v@3A power
- Rack mountable
- 15 slot motherboard
- Card cage
- Fan, line cord, fuse, switch, EMI filter
- Desk top version option
- 8v@30A, ± 16v@10A option
- Voltage monitor option



Rack mounted model From \$200

Desk top model From \$235

Write or call for a copy of our detailed brochure which includes our application note BUILDING CHEAP COMPUTERS.

8474 Ave 296 • Visalia, CA 93277 • (209) 733-9288

We accept BankAmericard/Visa and Master Charge

u COMPUTER BOARDS ◆ CPU WITH SERIAL PORT 8080A * * * S-100 SINGLE BOARD

Now it's easy - with a CPU Board which includes an on-board serial port. This 2 MHz CPU Board talks directly to your terminal by 20 ma current loop or RS-232. Baud rate selectable from 110 to 9600.

ASSEMBLED AND TESTED ... ONLY - \$195

AUDIO CASSETTE INTERFACE WITH 3 PARALLEL I/O PORTS S-100 * * * SINGLE BOARD

Your best choice for mass storage. This board includes 3 parallel 8 bit ports, a tape motor control (on-off) and a driver for external data I/O monitor lamp. The 3 PIO port common handshake signal lines are independent of data lines.

ASSEMBLED AND TESTED ... ONLY - \$195

OUR 20th YEAR OF ELECTRONIC EXCELLENCE



461 Laboratory Road Oak Ridge, TN 615-482-4041 TN 37830

Sol-20 SOFTWARE

ALS-8 UTILITIES, cassette I/O routines (ALS-8

SOFTPAC #1, 4 games: STAR, BLACKJACK

BLOCKADE, video action game for 2 players, 1 keyboard. (machine code, 8K) \$14.00

Sol-20 DIAGNOSTIC checks user RAM, system

CALENDAR & TIME, Gregorian calendar & digital clock. (Basic 5, 16K)\$10.00

DIRECT REDUCTION LOAN, amortization schedule

ACCOUNTS RECEIVABLE (requires Ex. Cass BASIC, 20K, 2 recorders)\$25.00

SMARTMOUTHED BLACKJACK, Las Vegas style (Ex. Cass. BASIC, 32K)\$19.50

IMMEDIATE DELIVERY, ONE YEAR WARRANTY All orders shipped C.O.D., or prepay with 3% added for freight. Texas residents add 5% sales tax

COMPUTER PERT C80

926 N. Collins Arlington, TX. 76011 (817) Metro 469-1502

Canadian **8K MEMORY KITS**

M1-Fast Signetics 21L02-1 RAMs with 20 pages of Documentation—solder mask Low power Schottky—S-100 Bus—Full Buffering

M2—as above with DIP switch address select and Robinson Nugent IC sockets only \$199.95

MEM1-WAMECO bare board as used in above kits \$39.95

Write for info on WAMECO CPU and other S-100 bare boards.

ORTHON COMPUTER

12411 Stony Plain Rd Edmonton, Alberta Canada T5N3N3

New TRS-80?

Put your TRS-80 to work... entertaining and educating with our programs...some old, some new, some borrowed, none blue... One-to-one duplication for flawless loading.

Space And War Games Bomber Pilot, Lunar Lander I and II, Star Wars I and II.

Random Chance Games Hockey, Darts, Roulette, Craps, Slots, RSP, Acey Ducey.

Strategy And Number Games Hammurabi, Bagels, Digits, Stars, Hot 'n' Cold, Golf, Piles. Postage paid \$6.00 each or 3 for \$15.00 from

CLOAD HOUSE S53

Box 524, Mercer Island, Wa. 98040

TRS 80

The Computer

RECIPES (programs) on CASSETTE TAPES for your hungry TRS 80—with lots of graphics!!

All programs written to run on your TRS 80-Level I (4k or more RAM)

Free COOKBOOK (catalog) of cassettes with other recipes (programs) included.

CASSETTE 8010: U.F.O. Battle • Checkbook • Draw Poker • Pile High • Poker Dice • Snoopy (graphic).

CASSETTE 8020: Monthly Minder • Slot Machine • Dart Throw • Venus Touchdown . Number Guess . Tic Tac Toe.

\$ 9.50 per cassette, \$18.00 for both.

Send Check or Money Order to:

THE COMPUTER PANTRY C82 2224-C Old Middlefield Way Mountain View, CA 94043 (415) 964-4175

The Pantry pays postage and tax!! Prompt Deliver

TRS - 80

SPECIAL PROMOTION SALE

Save 10% plus, NO TAXES will be charged on out of state shipments. Units Delivered in Continental U.S.

You can also save 10% on other fine Radio Shack® products we carry.

Offered exclusively by

Radio Shack® **Authorized Sales Center**

1117 Conway, Mission, Texas 78572 Radio Shack® warranties will be honored by your local Radio Shack® (512) 585-2763 store.







If you liked

THE INDEPENDENT NEWSLETTER OF HEATH CO. COMPUTERS 325 PENNSYLVANIA AVENUE, S.E. WASHINGTON, DC 20003

PROFESSIONAL SOFTWARE

GENERAL LEDGER FEATURING:

- *Multiple Debit-Credit Entries
- *Comment Field
- *Security Check
- *Extensive Error Checks
- *User Oriented with manual
- *Many Additional Features

System Requirements: 8K Free Memory, North Star Basic (CP/M available soon), Specify 1 or 2 Drives. Price: \$50.00

Ask about our other business. educational and scientific software.

> **ECOSOFT** E34 P.O. Box 68602 Indianapolis, IN. 46268

ATTENTION APPLE II OWNERS

Southeastern Software announces ready to run programs on tape for your computer . . .

Send \$5.95 plus 50¢ postage and handling for demo tape and sample newsletter designed for Apple II

Demo tape includes 1 game and 2 general interest programs. Specify if you want tape to run in BASIC, Applesoft or Applesoft II.

SOUTHEASTERN SOFTWARE

7270 Culpepper Drive New Orleans, LA 70126

COMPUTER SHOPPING?

The computer Data Directory can save you hours of time in locating computer products and company addresses. Contains Profiles of over 675 small computer manufacturers, stores, distributors, publishers, and electronic dealers. All addresses are up-to-date and at your finger tips! Over 100 pages. Includes reader service card to all firms listed. Definitely a useful reference source. Order yours today



ORDER TODAY
Only \$4.98

Plus \$1.00 Postage and Handling

SATISFACTION GUARANTEED OR YOUR MONEY BACK

| THE DIMPL | iter Data Directory |
|----------------|---|
| "The Index | of Small Computer Products and Companies" |
| Box. 598 | Cleveland, Ohio 44107 |
| | Please send mecopy(ies) |
| Name | |
| Street | |
| City | State Zip |
| Enclose \$4.98 | Each (Plus one dollar postage and handling) |

JOHNSON COMPUTER

J4

COMPUTER P. O. BOX 523, MEDINA, OHIO 44256 (216) 725-4560

FINALLY!

HDE inc. FLEXIBLE DISK SYSTEM FOR KIM Features:

- *Top Quality Industrial Grade Controller
- *Proven High Reliability Disc Drive
- *Line-Numbered Text Entry and Editing
- *A Powerful Command Structure
- *Adaptation to any 6500 Based System
- *Capability for User Defined Commands
- *Complete Compatibility with KIM
- Complete Compatibility with
- *Multiple Resident Files
- *Indexed and Non-Indexed Disk Storage

Complete 90 Day Parts and Labor Warranty

HDE FILE ORIENTATED DISK SYSTEM "FODS"

Includes:

- *Full Size Sykes Drive
- *6502 Based Controller
- *Power Supply
- *FODS Software
- *Cables, Interface Card
- *User Manual

commodore

TRS-80

EITHER WAY... We've got software for you!

You can find out what our customers already know—Personal Software consistently offers great software products. Check out the programs below—they each represent many man-months of expert programming effort. We're sure you'll be pleased with the results.

6502 ASSEMBLER IN BASIC by Dan Fylstra for 8K PETs: Accepts all standard 6502 instruction mnemonics, pseudo-ops and addressing modes. Evaluates binary, octal, hex, decimal, and character constants, symbols and expressions. Assembles object programs anywhere in memory. Includes one and two pass versions of the assembler, text editor and disassembler, with a 30 page manual and PET machine language programming hints\$24.95

MICROCHESS 1.5 by Peter Jennings for 4K Level I and II TRS-80s: In Z-80 machine language, easily loaded from cassette using the CLOAD command (TBUG is not needed). Uses standard algebraic chess notation to describe moves, and checks every move for legality. Handles castling and en passant captures. You can play white or black, set up and play from special board situations, or even watch the computer play against itself! With 3 levels of chess play \$19.95

ORDERS: Check, money order or VISA/Master Charge accepted; programs and cassettes guaranteed. Our catalog describes many other great software products, including an ASTROLOGY program, a FOOTBALL game, a GRAPHICS utility package and many others. For your free copy, send a letter giving your PET or TRS-80 serial number, memory size, and your most wanted software product.



Personal Software™



P.O. Box 136-K9, Cambridge, MA 02138 VISA/MC telephone orders welcome at (617) 783-0694

COMPARE AND SAVE

| | LIST | OUR CASH PRICE | |
|--|-------------------|----------------------|--|
| IMSAI 8080 Kit | 69900 | 569 ⁹⁵ | |
| North Star MDS A Kit with Power Supply, plus Cabinet and 3 Extra | 699% | 589 ⁹⁵ | |
| Diskettes | 790 ⁵⁰ | 659 ⁹⁵ | |
| Horizon I Kit | 159900 | 133900 | |
| | | | |

Check Our Prices on: Cromemco, Xitan, IMSAI, Vector Graphic, Sanyo, Hazeltine plus most other major lines.

Above Prices Include Cash Discounts.
Shipping Charges Extra.
Subject To Available Quantities.

Bus. ... 5-100, inc.

Address . . . 7 White Place Clark, N.J. 07066

Interface . . . (201) 382-1318



IMSAI et al

MARKETLINE SYSTEMS, Inc.

2337 Philmont Ave. Huntingdon Valley, Pa. 19006 215/947-6670 • 800/523-5355

D.C. METRO AREA

TYSONS CORNER, VIRGINIA

THE

COMPUTER SYSTEMS STORE

MICROCOMPUTERS & PERIPHERALS HOME, SCHOOL & SMALL BUSINESS

FEATURING Small Business Systems Complete with Application Software Including

Word Processing DEALERS FOR

Commodore Pet Processor Technology Polymorphic Cromemco west Technical Micro-Computer

Business Systems, Inc.

Lear Siegler Diablo Texas Instruments DEC North Star Anderson Jacobson

Books & Magazines



1984 Chain Bridge Rd. McLean, VA. 703-821-8333 **C73**

TRS-80 16K RAM CONVERSION KIT

SAVE OVER \$125.00!

This easy-to-use kit contains 8 dynamic memory chips UPD416 (1 X 16K) and instructions on converting your 4K TRS-80 to 16K.

ONLY \$165.00!



CALL YOUR ORDER IN (404) 458-4690

VISA

DELTRON

PO BOX 29363 D28 ATLANTA, GA 30359

SELECTOR II...

- AN ON-LINE REPORT **GENERATOR**
- AN ON-LINE FILE MANAGER
- REQUIRES NO **PROGRAMMING EXPERIENCE**
- FOR CP/M / MICROSOFT EXTENDED DISK BASIC USERS

SELECTOR II extracts selected information from your files according to your requirements, sorts it, and prints it in a formatted report.

Permanent license price of \$225 includes 1 year maintenance. Supplied on 8" single-density diskette, with user's manual.

Master Charge or Visa accepted. M51 **MICRO-AP**

8939 San Ramon Road Dublin, CA 94566

APPLE OWNERS

Interactive Trap and Chase games for two people. Software allows choice of speed and points and requires 8K RAM. Hardware consists of two game control boxes. Each box has four micro switches and specially designed printed circuit with 5 feet of cable completely assembled. Plugs right into your game I/O connector. Control boxes can also be used with the game Dragon Maze

Hardware and software cassette-\$49.95. (Texas residents add 5% sales tax.) 90 day warranty parts and labor. Guaranteed 30 day delivery. Allow time for processing personal checks. Send check or money order to:

B & G Interfaces P.O. Box 59364 **B28** Northhaven Sta. Dallas, Tx. 75229

UNUSUAL SOFTWARE FOR TRS-80!

\$10.00 each, on cassette

UTILITARIAN PROGRAMS

- CS-7 LEND OUT-A program jam-packed with automatic and semi-automatic features! For keeping track of items you lend to other people. Automatically assigns to a loaned item an identification number and files this number on tape along with such information as: what the item is, who borrowed it. and the date it was borrowed. Program updates file when item is returned without affecting the rest of the file. Plus even more features!
- CS-8 ITINERARY—Prepares a personal itinerary. Stores memos with their appropriate times in chronological order. Will recall itinerary as a whole or in parts. Even after an itinerary is filed, a new memo can be inserted into it between any two previously filed memos. More!

SCIENTIFIC CURIOSITIES

- CS-1 BIOFORECAST-More advanced than biorhythm. Uses more exact non-sinusoidal functions. Gives not only the three cycles, but also their interactions. More! With special interpretation chart.
- CS-2 ORBIT-4 programs figure data on orbits around the earth and sun.
- CS-3 INTERSTELLAR-Predicts facts concerning possible voyages to more than 30 different stars at relativistic
 - *Add \$1.00 postage & handling. All programs Level-1.





C86

PO Box 536 Inman SC 29349

SURPLUS ELECTRONICS



IBM SELECTRIC BASED I/O TERMINAL WITH ASCII CONVERSION **INSTALLED \$695.00**

Tape Drives
Cable
Cassette Drives
Wire
Power Supplies 12V15A, 12V25A, 5V35A Others,
Cabinets
XFMRS
Heat
Sinks
Printers
Components Many other items

Write for free catalog
WORLDWIDE ELECT. INC. W16 10 FLAGSTONE DRIVE HUDSON, N.H. 03051

Phone orders accepted using VISA or MC. Toll Free 1-800-258-1036 In N.H. 603-885-3705

AD-68A ANALOG-TO-



- •8 analog input channels
- Occupies one SWTPC 6800 I/O slot
- Quality components and PCB
- Complete documentation
- •90 day full warranty
- Assembled and tested \$39.95





factory direct. Write for additional information.

INNOVATIVE TECHNOLOGY

124

510 Oxford Park Garland, Texas 75043 (214) 270-8393

P.E.T.™ PRODUCTS

NEECO now has many products available for your Com modore P.E.T. - We invite software authors to contact us concerning our 25% Royalty Program.

SOFTWARE: Too many programs to list here! Call NEECO and ask us to send you our free Software/Hardware Products Directory!

THE MUSIC BOXTM: Music composer and sound effects THE MUSIC BOXTM:Music composer and sound effects generator. Allows you to compose and hear music on your P.E.T.—Program/Hardware allows you to display notes, HEAR the notes, save pages of music on tape for playback later, much more! The MUSIC BOXTM displays the notes as a song is played!—Allows you to add sound effects to your own programs!—Endless possibilities!—All cassette software, plug-in hardware and MUSIC BOXTM instruction book for only \$49.95!—MUSIC BOXTM fits right inside your P.E.T.!—No assembly required at all!

DUST COVER: PROTECT YOUR PET! Cover your P.E.T.'s delicate circuitry and keyboard from dust and spills! Heavy, clear vinyl plastic cover shows off your P.E.T. while protecting it from dust and unwanted sticky fingers! ONLY \$17.95

VISA OR MASTERCHARGE Phone Orders Accepted!(+4%)

NEW ENGLAND ELECTRONICS CO. 248 Bridge Street, Springfield MA 01103

(413) 739-9626

"Authorized Sales & Service on the Commodore P.E.T.™ Computer"

RELIABLE APPLE SOFTWARE NOW AVAILABLE ON CASSETTE

| 1. | Rainbows's Pot-of-Gold, Vol. 1 - 49 BASIC programs | \$49 |
|-----|--|------|
| 2. | Devils Dungeon | 10 |
| 3. | Black Jack - graphics, 1-2 players | 10 |
| 4. | Apple Checkbook | 20 |
| 5. | Applevision - Hi-resolution graphic/music demo | 15 |
| 6. | Hi-Resolution Life | 10 |
| 7. | Appleodian - Irish Jig Composing algorithm | 10 |
| 8. | Microchess | 15 |
| 9. | Income Tax - 1040, Schedules A & B | 25 |
| 10. | Apple Startrek/Starwars | 10 |
| 11. | Microproducts Apple Assembler | 20 |
| 12. | Circuit Logic Development Aid - 255 gates maximum | 10 |
| 13. | Inventory — allows for user field definitions | 35 |
| 14. | Apartment Building Cost Analysis - needs Applesoft | 15 |
| 15. | Memory Verify | 5 |
| 10 | Maria Cada Turiana | 10 |

Send Check or Money Order, sorry no stamps or C.O.D., to:

RAINBOW B12 COMPUTING INC.

10723 White Oak Ave., Dept. KB Granada Hills, CA 91344 (213) 360-2171

California Residents add 6% sales tax Allow 3-4 weeks for delivery

New TRS-80?

Put your TRS-80 to work... entertaining and educating with our programs...some old, some new, some borrowed, none blue... One-to-one duplication for flawless loading.

Space And War Games Bomber Pilot, Lunar Lander I and II. Star Wars I and II.

Random Chance Games Hockey, Darts, Roulette, Craps, Slots, RSP, Acey Ducey.

Strategy And Number Games Hammurabi, Bagels, Digits, Stars, Hot 'n' Cold, Golf, Piles.

Postage paid \$6.00 each or 3 for \$15.00 from

CLOAD HOUSE S53

Box 524, Mercer Island, Wa. 98040

RECYCLE(D) COMPUTERS

BUY & SELL & SWAP

Hardware & Software

NEW PRODUCT ANNOUNCEMENTS 22 DAME &

Mailed 1st Class every 3 Weeks

1 yr. (18 issues) 🕸 \$3.75 *****************************



Dane Brette. Dublisher Established 1975

24695 Santa Cruz Hwy. . Los Gatos, CA 95030

ersel elembrs eerl

INTERFACE BIOFEEDBACK EQUIPMENT **TO YOUR COMPUTER!**

We have a wide variety of biofeedback monitors to measure the following physiological variables:

| Variable | Monitor Price | Monthly Rental |
|--|----------------------|----------------|
| Electroencephalograph (Brain Waves) | \$299.50 | \$50.00 |
| Electromyograph (Surface Muscle Activity) | \$350.00 | \$62.50 |
| Skin Temperature | \$129.95 | \$35.00 |
| Galvanic Skin Response (Skin Resistance | \$ 99.50 | \$35.00 |

All of the above systems use 9 volt batteries, and are shipped with batteries, ready to operate. All require an opto-isolator (\$75.00 pur chase, \$25/mo, rental) to minimize noise pick-up from your computer

For complete literature and prices send \$2.00; creditable toward purchase or rental.

DEPARTMENT C

The Biofeedback Instrument Company 255 W. 98th Street

New York, New York 10025

PET SCHEMATICS

Another First From "PET-SHACK"

For only \$34.95 you get:

24" x 30" schematic of the CPU board, plus oversized schematics of the Video Monitor and Tape Recorder, plus complete Parts layout-all accurately and painstakingly drawn to the minutest detail.

PET ROM ROUTINES

Another Breakthrough From "PET-SHACK".

For only \$19.95 you get:

Complete Assembly listings of all 7 ROMs, plus identified subroutine entry points; Video Monitor, Keyboard routine, Tape Record and Playback routine, Real Time Clock, etc.

To entice you we are also including our own Machine Language Monitor program for your PET using the keyboard and video display.

You can have the Monitor program on cassette for only \$9.95 extra.

Send check or money order

PET-SHACK Software House Marketing and Research Co. P. O. Box 966 Mishawaka, IN 46544

P37



Datapoint CRT Terminals





Fully-Assembled — Guaranteed #3360 \$649.50

 Add \$15 packing refurbished

Add \$45.50 for scrolling mod, or do it yourself NOW—Power your KIM-I or other small processor from these terminals. Up to 2 Amps at 5, 14, 25 volts.

Model 3360 speeds from 300-4800 Baud, numeric Model 3360 speeds from 300-4800 Baud, numeric keypad, cursor controls, Edit, Block-Transmit, search modes. ASCII Keyboard with codeable options. Green phosphor. 24 82 Ch. lines, addressable cursor; RS-232 serial interface; other speeds available Manual \$10, Cable kit \$9.95. Datashare/IBM compatible version \$1,100. • Model 3000 \$675

M-33 KSR Teletypes \$595, ASR 33 \$735. Call us for service on CRTs, micros, main-frames. Leasing, quantity discounts available.

TELECOMMUNICATIONS SERVICES CO. Box 4117, Alexandria, Va. 22303 703-683-4019 / TLX 89-623

TRS 80 USERS

NOW! An alternate source! MACHINE language programs, documented and ready to CLOAD.

TEMON™ MACHINE LANGUAGE MONITOR


● Runs with Level | BASIC ● Loads in 18 sec. ● Reloads in 4 sec. after reset ● Compatible with T-BUG programs ● Commands are Display, Write, Go, Load, Swe (with specified rields), Resume after multiple breakpoints, X (register display) ● Displays 240 bytes at one time ● Curser includes backspace delete prior to ENTER ● Error detection and edit

TEBED"MACHINE LANGUAGE LOADER & EDITOR \$24.95
A unique tool for Level | BASIC 16k RAM users • Loads anytime without disturbing user program • Reloads in 4 sec. • Stacks
more than one BASIC program in RAM • Assigns new, evenly
spaced line numbers • Reassigns branch references • Merges
favorite subroutines anytime • Specified sections of program
may be Csaved • Uncrowds packed line numbers • One-pass
loading of multiple programs | A Super Tool!].

Are you having a problem with your cassette where it doesn't stop when it should? Then you need our TBUFF" module. TBUFF simply plugs into the Remote cable from the computer to the cassette and ends this hangup forever.


Send check or money order to:

WEB ASSOCIATES W20 P.O.Box 60-C Monrovia, CA 91016 (California Residents add 6% tax)









● Full 128 Character ASCII ● Tri-Mode MOS Encoding • MOS/DTL/TTL Compatible Output • Two-Key Rollover • Level and Pulse Strobe • Shift and Alpha Lock • Selectable Parity • Positive or Negative Logic • All New, OEM
Grade Components • Gold Contact, Low
Bounce Key Switches • Rugged G-10 Printed Circuit Board . Low Power Consumption .

Model 756 Keyboard Kit \$69.95 Model 701 Plastic Enclosure \$14.95 Model 702 Steel Enclosure . . .

Send for catalogue of other NEW merchandise, Semis, Sockets, ICs, Res., Caps, and MORE. N.Y.S. Residents Add 4% Sales Tax

Send to:

Key Electronics P.O. Box 3506


Schenectady, NY 12303

K14

133

For free catalog including parts lists and schematics, send a self-addressed stamped envelope.


TIDMA

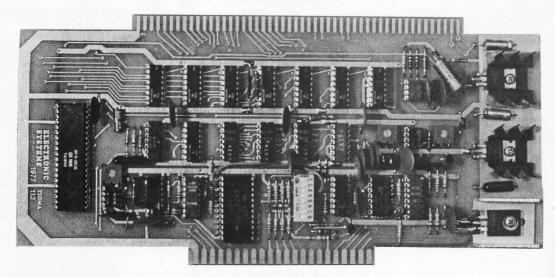

With this Tape Interface Direct Memory Access board you can record and play programs without a bootstrap loader (no prom). This can be up and running as fast as putting it in the socket. It takes complete control of the S-100 bus and reads or writes directly into the memory without the need of the microprocessor. It has an FSK encoder/decoder for direct connections to a low cost cassette recorder at 1200 baud, and inputs and outputs for direct connections to a digital recorder at any baud rate. This board is S-100 bus compatible.

Board only, \$35.00 Part No. 112; with parts \$110.00 Part No. 112A.

APPLE II SERIAL I/O INTERFACE

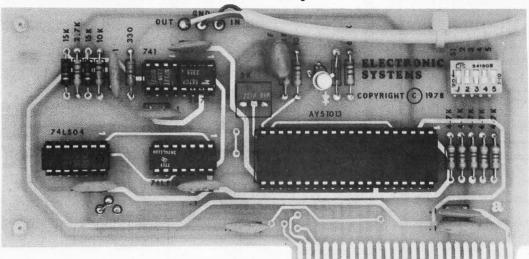

This serial I/O port is continuously adjustable from 0 to 30,000 baud and plugs into any peripheral connector. Features a low current drain, RS-232 input and output, and jumper selectable address. On board switch is selectable 5 to 8 data bits, 1 or 2 stop bits, and parity or no parity either odd or even. SOFTWARE: input and output routine from monitor or Basic to teletype or other serial printer; program for using an Apple II for a video or an intelligent terminal; can output in correspondence code to interface with some selectrics.

Board only, \$15.00 Part No. 2; with parts, \$42.00 Part No. 2A; Assembled and tested, \$62.00 Part No. 2C.

ELECTRONIC SYSTEMS

Dept. KB, P.O. Box 21638, San Jose, CA. USA 95157

To Order:





Mention part number and description. For parts kits add "A" to part number. In USA, shipping paid for orders accompanied by check, money order, or Master Charge, BankAmericard, or VISA number, expiration date and signature. Shipping charges added to C.O.D. orders. California residents add 6.5% for tax. Outside USA add 10% for air mail postage, no C.O.D.'s. Checks and money orders must be payable in US dollars. Parts kits include sockets for all ICs, components, and circuit board. Documentation is included with all products. All items are in stock, and will be shipped the day order is received via first class mail. Prices are in US dollars. No open accounts. To eliminate tariff in Canada boxes are marked "Computer Parts." Dealer inquiries invited. 24 Hour Order Line: (408) 226-4064



COMPUTER INTERFACES & PERIPHERALS

For free catalog including parts lists and schematics, send a self-addressed stamped envelope.

APPLE II SERIAL I/O **INTERFACE***

Baud rate is continuously adjustable from 0 to 30,000 . Plugs into any peripheral connector . Low current drain. RS-232 input and output . On board switch selectable 5 to 8 data bits, 1 or 2 stop bits, and parity or no parity either odd or even • Jumper selectable address • SOFTWARE . Input and Output routine

MODEM*

• Type 103 • Full or half

duplex . Works up to 300

baud . Originate or Ans-

wer . No coils, only low

cost components • TTL

input and output-serial .

Connect 8 ohm speaker


Part no. 109

from monitor or BASIC to teletype or other serial printer. • Program for using an Apple II for a video or an intelligent terminal. Also can output in correspondence code to interface with some selectrics. Board only - \$15.00; with parts - \$42.00; assembled and tested - \$62.00.

T.V. TYPEWRITER

 Stand alone TVT • 32 char/line, 16 lines, modifications for 64 char/line included • Parallel ASCII (TTL) input . Video output • 1K on board memory • Output for computer controlled cur-

ser . Auto scroll .



Non-destructive curser • Curser inputs: up, down, left, right, home, EOL, EOS • Scroll up, down • Requires +5 volts at 1.5 amps, and -12 volts at 30 mA . All 7400, TTL chips • Char. gen. 2513 • Upper case only • Board only \$39.00; with parts \$145.00

TIDMA *

8K STATIC RAM

Part no. 300 • 8K Altair bus memory • Uses 2102 Static memory chips . Memory protect . Gold contacts . Wait states . On board regulator • S-100 bus compatible • Vector input option . TRI state buffered . Board only \$22.50; with parts \$160.00

RF MODULATOR*



highly in Doctor Dobbs' Journal. Recommended by Apple. • Power required is 12 volts AC C.T., or

· Converts video to AM modulated RF, Channels 2 or 3. So powerful almost no tuning is reguired. On board regulated power supply makes this extremely stable. Rated very

+5 volts DC • Board \$7.60; with parts \$13.50

DC POWER SUPPLY*

and crystal mic. directly to board . Uses XR FSK demodulator • Requires +5 volts • Board \$7.60;

with parts \$27.50

• Board supplies a regulated +5 volts at 3 amps., +12, -12, and -5 volts at 1 amp. • Power required is 8 volts AC at 3 amps., and 24 volts AC C.T. at 1.5 amps. • Board only \$12.50; with parts excluding transformers \$42.50




Part no. 112

• Tape Interface Direct Memory Access • Record and play programs without bootstrap loader (no prom) has FSK encoder/decoder for direct connections to low cost recorder at 1200 baud rate, and direct connections for inputs and outputs to a digital recorder at any baud rate. • S-100 bus compatible • Board only \$35.00; with parts \$110.00

RS 232/TTY* INTERFACE

Part no. 600

 Converts RS-232 to 20mA current loop, and 20mA current loop to RS-232 • Two separate circuits • Requires +12 and -12 volts . Board only \$4.50, with parts \$7.00



TAPE INTERFACE*

Part no. 111

 Play and record Kansas City Standard tapes • Converts a low cost tape recorder to a digital recorder • Works up to 1200 baud . Digital in and out are TTL-serial . Output of board connects to mic. in of recorder . Earphone of

recorder connects to input on board . No coils . Requires +5 volts, low power drain • Board \$7.60; with parts \$27.50

UART & BAUD RATE GENERATOR*

Part no. 101

 Converts serial to parallel and parallel to serial . Low cost on board baud rate generator • Baud rates: 110, 150, 300, 600, 1200, and 2400 • Low power drain +5 volts and -12 volts required

• TTL compatible • All characters contain a start bit, 5 to 8 data bits, 1 or 2 stop bits, and either odd or even parity.

· All connections go to a 44 pin gold plated edge connector . Board only \$12.00; with parts \$35.00 with connector

RS 232/TTL* INTERFACE

Part no. 232

· Converts TTL to RS-232, and converts RS-232 to TTL • Two separate circuits

• Requires -12 and +12 volts

 All connections go to a 10 pin gold plated edge connector • Board only \$4.50; with parts \$7.00 with connector add \$2.00



Dept. KB,

P.O. Box 21638, San Jose, CA. USA 95157





Mention part number and description. For parts kits add "A" to part number. In USA, shipping paid for orders accompanied by check, money order, or Master Charge, BankAmericard, or VISA number, expiration date and signature. Shipping charges added to C.O.D. orders. California residents add 6.5% for tax. Outside USA add 10% for air mail postage, no C.O.D.'s. Checks and money orders must be payable in US dollars. Parts kits include sockets for all ICs, components, and circuit board. Documentation is included with all products. All items are in stock, and will be shipped the day order is received via first class mail. Prices are in US dollars. No open accounts. To eliminate tariff in Canada boxes are marked "Computer Parts." Dealer inquiries invited. 24 Hour Order Line: (408) 226-4064 * Circuits designed by John Bell

| | 10mA .05 8-pin 1A .08 14-pin 1A .15 16-pin 10mA .05 18-pin W Zener .25 22-pin mW Zener .25 24-pin " .25 28-pin " .25 40-pin " .25 Molex p " .25 2 Amp | | 2N2907 PNP 2N3906 PNP (Plastic 2N3904 NPN (Plastic 2N3054 NPN 2N3055 NPN 15A T1P125 PNP Darli LED Green, Red, Clear, Y D.L.747 7 seg 5/8" H MAN72 7 seg com-an MAN3610 7 seg com-an | 22 Plastic .10) .15 .15 c - Unmarked) .10 c - Unmarked) .10 .35 .60v .50 ngton .35 ellow .15 igh com-anode .1.95 node (Red) .1.25 node (Orange) .1.25 node (Yellow) .1.25 thode (Red) .1.50 |
|--|--|--|---|---|
| C MOS | | - T T L - | | |
| 4030 .35 74 4033 1.50 74 4034 2.45 74 4035 .75 74 4040 .75 74 4041 .69 74 4042 .65 74 4043 .50 74 4044 .65 74 4046 1.25 74 4049 .45 74 4050 .45 74 | 01 .15 7474 02 .15 7475 03 .15 7476 04 .10 7480 05 .25 7481 06 .25 7485 08 .15 7486 09 .15 7489 10 .15 7490 11 .25 7491 12 .25 7492 13 .25 7493 14 .75 7494 16 .25 7495 17 .40 7496 20 .15 74100 26 .25 74107 27 .25 74121 30 .15 74122 32 .20 74123 33 .20 74126 40 .20 74132 | .25 74176 .85 .30 74180 .55 .35 74181 2.25 .40 74182 .75 .55 74190 1.25 .55 74191 .95 .75 74192 .75 .55 74193 .85 .25 74194 .95 .05 74195 .95 .45 74196 .95 .70 74197 .95 .45 74198 1.45 .35 74221 1.00 .75 74367 .75 .60 .80 75108A .35 .15 .75491 .50 .35 .75491 .50 .35 .74401 .20 .35 .74401 .20 .35 .74401 .20 .35 .74403 .20 .90 .74408 .35 .85 .74411 .25 | 74H72 .35 74H101 .75 74H103 .55 74H106 .95 74L00 .25 74L02 .20 74L03 .25 74L04 .30 74L10 .20 74L20 .35 74L47 1.95 74L47 1.95 74L51 .45 74L55 .65 74L72 .45 74L73 .40 74L74 .45 74L73 .55 74L93 .55 74L123 .85 74S00 .35 74S02 .35 74S02 .35 74S04 .25 74S03 .25 74S04 .25 74S05 .35 74S04 .25 74S08 .35 74S11 .35 74S11 .35 74S11 .35 74S11 .35 74S11 .25 74S64 .15 74S74 .35 74S112 .60 74S51 .25 74S64 .15 74S74 .35 74S112 .60 74S114 .665 | 74S133 |
| 4069/74 C04 .25 4071 .25 4081 .30 4082 .30 MC 14409 14.50 MC 14419 4.85 4511 .95 74C151 1.90 | MCT2 .95 8038 3.95 LM201 .75 LM301 .45 LM308 (Mini) .95 LM309H .65 LM309K (340K-5)85 | LINEARS, REGULA LM320T5 1.65 LM320T12 1.65 LM320T15 1.65 LM324N 1.25 LM339 .75 7805 (340T5) .95 | LM340K15 1.25 LM340K18 1.25 LM340K24 1.25 78L05 .75 78L12 .75 78L15 .75 | LM723 .40 LM725N 2.50 LM739 1.50 LM741 (8-14) .25 LM747 1.10 LM1307 1.25 |
| 9000 SERIES 9301 .85 95H03 1.10 9309 .35 9601 .20 9322 .65 9602 .45 | LM310 .85 LM311D (Mini) .75 LM318 (Mini) 1.75 LM320K5(7905)1.65 LM320K12 1.65 | LM340T12 .95 LM340T15 .95 LM340T18 .95 LM340T24 .95 LM340K12 1.25 | 78M05 .75 LM373 2.95 LM380 (8-14 PIN) .95 LM709 (8,14 PIN).25 LM711 .45 | LM1458 .65 LM3900 .50 LM75451 .65 NE555 .35 NE556 .85 |
| MICRO'S, RAMS, CPU'S, E-PROMS 74\$188 3.00 1 8214 8.5 | INTEGRAT | ED CIRCUITS U | NLIMITED 19 | NE565 .95 NE566 1.25 NE567 .95 |
| 1702A 4.50 8224 3.7 MM5314 3.00 8228 6.0 MM5316 3.50 8251 8.1 2102-1 1.45 8255 10.1 2102L-1 1.75 8T13 1.1 2114 9.50 8T23 1.1 TR1602B 3.95 8T24 2.6 TMS 4044- 9.95 8T97 1.1 2107B-4 4.3 | 7889 Clairemont 7889 Clairemont All orders Open accor Discounts available at Ol All IC's Prime/Gu | unts invited CO | minimum D orders accepted lents add 6% Sales Tax | SPECIAL DISCOUNTS Total Order Deduct \$35 - \$99 10% \$100 - \$300 15% \$301 - \$1000 20% |
| 8080 8.95 2708 9.1 8212 2.95 Z80 PIO 8.5 | 24 Hour Toll Free Phone 1 | -800- 854-2211 American | Express / BankAmericard | / Visa / MasterCharge |

ELECTRONICS EMPORIUM INTERNATIONAL

7895 Clairemont Mesa Blvd. • San Diego, California 92111 24 Hour Toll Free Phone 1-800-854-2211 (714) 278-4394 (Calif. Res.)

All orders shipped prepaid • COD orders accepted
All orders shipped same day received
California residents at 6% sales tax
Master Charge / BankAmericard / AE

ASTRON POWER SUPPLIES

HEAVY DUTY • HIGH QUALITY • RUGGED • RELIABLE •

SPECIAL FEATURES

- * SOLID STATE ELECTRONICALLY REGULATED
- FOLD-BACK CURRENT LIMITING Protects Power Supply from excessive current & continuous shorted output.
- CROWBAR OVER VOLTAGE PROTECTION on Models RS-6A, RS-12A, RS-20A, & RS-35A.
- MAINTAIN REGULATION & LOW RIPPLE at low line input Voltage.
- HEAVY DUTY HEAT SINK
- * CHASSIS MOUNT FUSE
- THREE CONDUCTOR POWER CORD
- * _NE YEAR WARRANTY
- * MADE IN U.S.A.

PERFORMANCE SPECIFICATIONS

- * INPUT VOLTAGE: 105 125 VAC
- * OUTPUT VOLTAGE: 13.8 VDC ± 0.05 volts
- RIPPLE: Less than 5mv peak to peak (full load & low

* REGULATION: ± .05 volts no load to full load & low line to high line

ASTRON 12 AMP REGULATED POWER SUPPLY Model RS-12A

9 Amps continuous 12 Amps ICS 4" (H) x 8" (W) x 9" (D)

\$6995



ASTRON 7AMP REGULATED POWER SUPPLY Model RS-7A

5 Amps continuous 7 Amps ICS

\$4995





ASTRON 35 AMP POWER SUPPLY Model RS-35A


25 Amps continuous

35 Amps ICS

5" (H) x 11" (W) x 11" (D)

ASTRON 20 AMP POWER SUPPLY Model RS-20A

16 Amps continuous 20 Amps ICS 5" (H) x 9" (W) x 9" (D)

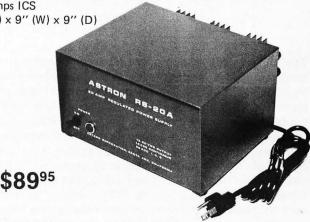

ASTRON 4 AMP REGULATED POWER SUPPLY Model RS 4A

3 Amps continuous 4 Amps ICS

\$3995



People have used our original model CB-0 Controller Board for controlling audio systems, model railroads, time lapse photography, and dozens of other applications requiring intelligent, computer-controlled switching.


Our improved model CB-1 has all the features of its predecessor: 8 relays that respond to an 8 bit word for control purposes, 8 opto-isolators that accept input data for handshaking or further control purposes, full S-100 buss compatibility, address selection switch, quality components and board, and so on.

But . . . the limited use (and expensive!) flat cable connector has been replaced with new connectors, these allow you to use pairs of wires of mixed gauges and lengths as needed. Also, a self-test feature is built on the board itself, and a new output design allows replacement of the relays with opto-isolators.

The best part is that you don't pay a penny more for these new features. In fact, compared to the CB-0 price, you pay 2,900 pennies less.

Available at computer stores nation-wide, or by direct mail (mail orders shipped postpaid in USA; Californians and sales tax).

\$88 CONTROL

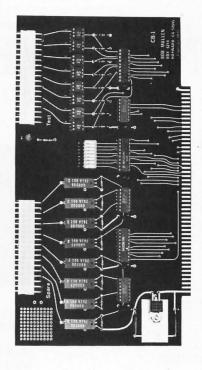

The Mullen CB-1 Controller Board--- now at a new low price.

M32

MULLEN COMPUTER BOARDS

BOX 6214, HAYWARD, CA 94545

THE OE 1000 IS NOT CHEAP, ONLY INEXPENSIVE

The OE is supplied with only prime components from major manufactures. It uses a solder masked, component marked, pc board that is double sided with plated through holes, and a gold plated edge connector. All IC's have sockets and the unit contains its' own power supply. The video output is composite, ready for input into a modified TV or video monitor. The OE 1000 will display 96 ASCII characters plus 32 special characters (greek, math and other symbols) on 16 lines of 64 characters. The keyboard used will output both upper and lower case or just upper case (TTY mode). The terminal accepts data in RS 232 or 20 ma current loop form and has selectable baud rates of 110 or 300 baud. The OE 1000 is housed in a large, high impact, plastic case, leaving enough room for expansion of your microcomputer. All this for only \$275.00 in kit and \$350.00 assembled. (add \$5.00 for insurance and shipping cost) YES we are inexpensive, but not cheap.

jor pc old nit te, DE ial 64 OF 1000

MC, BAC/VISA, COD ACCEPTED 609 448 9165

NJ RESIDENTS ADD 5% SALES TAX

OTTO ELECTRONICS, PO BOX 3066, PRINCETON, NJ 08540

09

COMPUTER SPECIALS

EXIDY SORCERER™

WE'VE $^{ ea}$ GOT A TRUCKLOAD COMING! ... and it's COLOR

"The Compucolor II"

- ... a personal colorgraphics system for the modern computer man...
- Color Graphics 13" Color CRT
- Proven 8080A CPU System
- 16K Extended Disk Basic Up to 117* Key Keyboard
- Up to 32K* RAM
- Minidisk Drive 51.2K Bytes/Side



*options

Order your system now and we will include at no cost (2) Programmed Software Diskettes (\$39.90 value)

Model 3 with 8K RAM 71 Key Keyboard.... Model 4 with 16K RAM & RS232C port plus 71 Key Keyboard.....

Model 5 with 32K RAM, RS232C and 71 Key Keyboard ... Options: for RS232 on Model 3 Add \$100.00 101 Key Keyboard Add \$150.00
 117 Key Keyboard
 Add \$225.00

 Programmed Diskettes
 \$19.95 each

Formatted Diskettes......2/\$19.95

....\$1395

\$1995.00

AIM-1

NEW FROM ROCKWELL INTERNATIONAL

\$895.00

User programmable or use program cartridges. Combines

the desirable features of the

PET, APPLE and TRS-80 into a

complete expandable computer

system. If you are a comparison shopper send for comparison

Singleboard Computer

- On Board 20 column
- alphanumeric printer Alphanumeric 20 character display
- Terminal style Keyboard 54 Keys
- 6502 based CPU

w/1K RAM \$375.00 w/4K RAM \$450.00 Assembler ROM . . . Add \$85.00 BASIC Interpreter in ROM

..... Add \$100.00

RCA COSMAC VIP

INCLUDES:

assembled

Keyboard & enclosure totally

90 day Warranty 19.5K BASIC (MICROSOFT)

Video & Cassette Cable

Complete Documentation

S100 Expansion Module Add \$299.00

Cassette recorder Add \$44.95 Sanyo 9" Monitor

..... Add \$159.95



NEW LOW PRICE \$249.00

Assembled Regular price \$299.95

w/Sanyo 9" Monitor Add \$159.95

"Now you can afford to experiment using RCA's fine 1802 CMOS CPU."

KIM-1 **Now only** \$229.95

Regular price \$245.00

The KIM-1 6502 Standard Computer System now available off the shelf. Write for complete details and software package.

Power Supply

.....Add \$95.00 Cassette Recorder ... Add \$44.95

★★ Sanyo 9" Monitor

..... Add \$159.95

VIM-1

"The Ultimate in Single Board Low-Cost Computers" In Stock

\$269.00

- KIM-1 Compatible
- 4K ROM Monitor
- 1K Bytes 2114 RAM 65K Memory Expansion User EPROM 2716
- ★★ Power Supply
- Add \$95.00 Cassette Recorder
-Add \$44.95 Sanyo 9" Monitor

..... Add \$159.95 School & group discounts available.

BALLY ARCADE

Z-80 based expandable to 48K Color Display BASIC available in **ROM Cartridge** 8K ROM AK RAM

\$299.95



NORTH STAR HORIZON

Now in stock North Star Z-80 based high-performance computer.

- Z-80 Processor
- Motherboard
- 2 Serial +1 Parallel Port
- 16K RAM

Horizon I \$1439.00 Kit Horizon II.... \$1799.00 Kit



PRINTERS

OKIDATA Model 110 w/tractor w/RS232\$1675.00
OKIDATA Model 22 w/tractor w/RS232 DECWRITER II w/RS232 10-30 cps \$1475.00 DIABLO 1620-3 w/tractor feed, w/Keyboard.....\$3255.00 DIABLO 1610-3 w/tractor feed \$2995.00 IPSI 1622-3 w/tractor feed (diablo compatible) \$2995.00 IPSI 1612-3 w/tractor feed

(diablo compatible).....\$2820.00 Centronics 761 (KSR).....\$1595.00

Teletype Model 43 w/no252.... TI Model 745 w/upper and lower case \$1975.00

FLOPPY DISK'S
Shugart SA400 Minifloppy Disk Drive
\$325.00 \$325.00
Shugart SA450 Dual Density Minifloppy
\$375.00
Shugart SA800/801 Diskette Storage Drive\$495.00 Shugart SA850/851 Double-Sided Drive\$625.00

MFE Mayflower Model 751 Double
Density. \$730.00
Persci Model 277 Dual Diskette
Storage Drive. \$1230.00
Pertec FD200 Minifloppy Disk Drive
\$299.00
Calcomp Model 143M Dual Density
Drive. \$625.00

TERMINALS

SOROC IQ 120......\$895.00 LEAR ADM3 Assembled....\$829.95 LEAR ADM3 Kit\$739.95 \$209.95

KEYBOARDS
GEO Risk Model 756 ASCII 56 Key
Assembled \$67.95
Metal case for Model 756 \$27.00 Metal case for Model 756...\$27.00
Clare Pender 62 Key ASCII w/26 Pin
and 34 Pin Connector
(new surplus supply limited)...\$54.95
63 Key Unencoded Keyboard...\$32.95
10 Key Hexpad Unencoded...\$11.95

ADVANCED COMPUTER PRODUCTS

P. O. Box 17329 • Irvine, California 92713 1310 B E. Edinger • Santa Ana, California 92705 TWX/TELEX 910 595 1565 • TEL (714) 558-8813 All prices FOB Santa Ana. Please add shipping/ handling. For credit card purchase contact for quotation. Complete FREE 1978 Catalogue send 25¢ for postage.

16K E-PROM CARD

IMAGINE HAVING 16K OF SOFTWARE ON LINE AT ALL TIME!

KIT FEATURES:


1. Double sided PC board with solder mask and silk screen and gold plated contact fingers.

Selectable wait states.

All address lines & data lines buf-fered!

All sockets included.

5. On card regulators.
KIT INCLUDES ALL PARTS AND SOCKETS (except 2708's). Add \$25. for assembled and tested.



PRICE CUT!

57.50 kit

SPECIAL OFFER:

WAS \$69.95

\$12.95

Our 2708's (450NS) are when purchased with above kit.

July Static!

.....

....

.....

....

ADD \$20 FOR 250 NS

KIT FEATURES:


Doubled sided PC Board with solder mask and silk screen layout. Gold plated contact fingers.
 All sockets included.
 Fully, buffered on all address and

data lines.
4. Phantom is jumper selectable to

pin 67. FOUR 7805 regulators are provided (450NS)

8K LOW POWER RAM KIT-\$149.00

S-100 (Imsai/Altair) Buss Compatible!



USES 21L02 RAM'S!

2 KITS FOR \$279

Fully Assembled & Burned In \$179.00

Blank PC Board w/ Documentation \$29.95

Low Profile Socket Set 13.50 Support IC's (TTL & Regulators) \$9.75

Bypass CAP's (Disc & Tantalums) \$4.50

MOTOROLA QUAD OP - AMP MC 3401. PIN FOR PIN SUB. FOR POPULAR LM 3900.

3 FOR \$1

ALARM CLOCK CHIP

N.S. MM5375AA. Six Digits. With full Data. New! \$1.95 each

FULL WAVE BRIDGE

4 AMP. 200 PIV. 10 FOR \$5.75 69¢

NOT ASSOCIATED WITH DIGITAL RESEARCH OF CALIFORNIA, THE SUPPLIERS OF CPM SOFTWARE.

MOTOROLA 7805R VOLTAGE REGULATOR Same as standard 7805 except 750 MA output. TO-220. 5VDC output.

44c each

or

10 for \$3.95

450 NS!

2708 EPROMS

Now full speed! Prime new units from a major U.S. Mfg. 450 N.S. Access time, 1K x 8, Equiv, to 4-1702 A's in one package.

\$15.75 ea.

4 FOR \$5000

INTEL 2102 RAM SALE!

BRAND NEW 2102A-4. FACTORY PRIME! WE MADE ANOTHER SUPER SURPLUS BUY!

PERFECT FOR USE WITH OUR BLANK 8K PC BOARD SHOWN ABOVE.

THESE PARTS HAVE BEEN SCREENED TO MEET THE LOW POWER SPEC. AND ARE GUAR-ANTEED BY US TO BE 40 MA MAXIMUM ICC

(28 MA. TYPICAL)

LOW **POWER**

450 N.S.

'A'' VERSION FOR BATTERY BACKUP!

BRAND NEW!

8 FOR \$795 32 FOR \$28

4K STATIC RAM'S

2114. The new industry standard. Arranged as 1K x4. Equivalent to 4-21 L02's in 1 package! 18 pin DIP. 2 chips give 1Kx8.

2/\$24. 8/\$85.

ASSEMBLED! NOT A KIT!

#MA1008D - \$9.95

OPCOA LED READOUT

SLA-1. Common Anode. .33 inch character size. The original high efficiency LED display. 75c ea.

4 FOR \$2.50

Z-80 PROGRAMMING MANUAL

By Mostek, The major Z-80 second source. The most detailed explanation ever on the working of the Z-80 CPU CHIPS. At least one full page on each of the 158 Z-80 instructions. A MUST reference manual for any user of the Z-80. 300 pages. Just off the press. \$12.95

NATIONAL SEMICONDUCTOR



ZULU VERSION!

\$**6**95

2 FOR (AC XFMR \$1.95) FEATURES: • FOUR JUMBO ½ INCH LED DISPLAYS • 12 HR REAL TIME FORMAT • 24 HR ALARM SIGNAL OUTPUT • 50 OR 60 Hz OPERATION

LED BRIGHTNESS CONTROL POWER FAILURE INDICATOR SLEEP & SNOOZE TIMERS * DIRECT LED DRIVE (LOW RFI)
* COMES WITH FULL DATA

> **COMPARE AT UP TO TWICE OUR PRICE!**

MANUFACTURER'S CLOSEOUT!

REAL TIME SALE! Newl MA1008A

JUMBO CLOCK MODULE



1N4148 DIODES. SILICON. Computer Clock Chip Same as 1N914. New, factory prime, Full Leads. 100 FOR \$2

N.S. MM5313. Features BOTH 7 segment and BCD outputs. 28 Pin DIP. \$4.95 with Data

EACH

1000 FOR \$17.50

99¢

SPDT. By RAYTHEON. MADE IN USA! WITH HDWR.

MICRO-MINI TOGGLE SWITCH

6 FOR \$5

Research Corporation (OF TEXAS) P. O. BOX 401247 • GARLAND, TEXAS 75040 • (214) 271-2461

PERFECT FOR USE WITH A TIMEBASE.

TERMS: Add 30¢ postage, we pay balance. Orders under \$15 add 75¢ handling. No C.O.D. We accept Visa, Mastercharge, and American Express cards. Tex. Res. add 5% Tax. Foreign orders (except Canada) add 20% P & H. 90 Day Money Back Guarantee on all items.

S100 PRODUCTS

LOGOS I 8K STATIC RAM

- r Selectable Memory Protect r Totally Buffered
- * Battery Back-up
- Address on 1K boundary
- Requires no front panel No wait states

ASSEMBLED & TESTED

199.95 179.95

KIT

450ns. 125.95

GROUP DISCOUNTS

Bare PC Board w/Data \$21.95 Now over 1 year successful field experience "Special Offer" Buy (4) 8K 450ns. Kits \$117.00

IMS 16K STATIC RAM

- Phantom Address 16K Bound
- ★ Memory mapping ★ Phantom ★ Address 1017
- Use with or w/o front panel Power 2.1 amps typ. Uses 2114

ASSEMBLED & TESTED ONLY 450ns. \$439.95 250ns. \$495.95

S-100 32K STATIC RAM

- Address 32K Boundary Power 450ns. 2.8 amps typ. No wait states on 2MHz Fully Buffered Phantom can be added 2114/TMS4045 or 9135

ASSEMBLED & TESTED 250ns. \$790.00 450ns. \$740.00 250ns. \$849.00 450ns. \$799.00

Bare PC Board w/Data \$59.95 SPECIAL OFFER: Kit without Memory only \$99.95. Add 2114 Memory for \$160.00 per 8K

PARATRONICS LOGIC

| ANALIELI IVII |
|---------------------------------------|
| MODEL 100A\$219.95 |
| (analyzes any type of digital system) |
| Trigger Expander Model 10\$229.00 |
| Baseplate |
| Model 10 Manual4.95 |
| Model 150 Bus Grabber Kit 369.00 |
| |

DC HAYES DATA COMMUNI-

| CATIONO ADALTEIN |
|--|
| ★ Telephone/TWX ★ S-100 compatible |
| ★ Bell 103 freq. ★ Originate & answer mode |
| Assembled & Tested \$279.95 |
| Bare PC Board w/data \$ 49.95 |

Z-80/Z-80A CPU BOARD

- Power on jump 2708 includea (450ns.) completely socketed
- Assembled and tested
- ★ For 4MHz Speed Add \$15.00

TDL COMPATIBLE Z-80 CPU

| ★ Compatible to TDL software & hardware | ★ Can be upgraded for 4MHz operation |
|---|---|
| Assembled and tested Kit | \$199.95 \$139.95 |
| Bare PC Board | \$ 34.95 |

BYTE USER 8K EPROM BOARD

| ★ Power on Jump | ★ Reset Jump |
|----------------------|------------------------|
| Assembled & Tested | 94.95 |
| Kit | 64.95 |
| Bare Pc Board | 21.95 |
| Special Offer: Buy 4 | kits only \$59.95 each |

TRS 80 UPGRADE KIT

| 16K Memory with Jumpers and | |
|-------------------------------|----------|
| Instructions | \$159.95 |
| (Specify Level I or Level II) | |
| APPLE II 16K UPGRADE KIT | \$149.95 |

TARBELL FLOPPY INTERFACE

| ★ S100 Compatible ★ Jumper Selectable | ★ Uses CPM ★ Persci,Shugart,etc |
|---------------------------------------|------------------------------------|
| Assembled and tested | \$269.95 |
| Rit | |
| NOTE: For CPM Add S | 570.00 |

PET TO S-100

| Allows Pet to be | |
|-----------------------|--|
| interfaced to | |
| popular S-100 Bus. | The state of the s |
| | \$189.95 |
| Assembled | \$269.95 |
| For Low Cost 8 Slot | Bus to expand |
| your Pet only | \$149.95 Kit |

MICRODESIGN MR-16 2716

EPROM BOARD (MR-8 Also Available at same price)

- 99.50

DATABOOKS & MANUALS

| NSC TTL Data \$ 3.95 | AMI MOS/LSI Data 3.95 | Mot. Vol.4 Mecl Data 3.95 |
|-----------------------------|-------------------------------------|--------------------------------------|
| NSC Linear Data | GI MOS/LSI Data 4.95 | Mot. Vol. 5 CMOS Data 2.95 |
| NSC Linear APP/note I 3.95 | Osborne Intro to Micro Vol. 0 7.50 | Mot. Vol. 6 Linear Data 3.95 |
| NSC Linear APP/note II 3.95 | Osborne Intro to Micro Vol. 1 7.50 | Mot. Vol. 9 Schottky TTL 2.95 |
| NSC CMOS Data 2.95 | Osborne Intro to Micro Vol. II 7.50 | Mot. MPU Applications 25.00 |
| NSC Audio Data | Osborne 8080 Programming 7.50 | Mot. MPU Prog. Ref. Manual 3.95 |
| NSC Volt. Reg. Data 2.95 | Osborne 6800 Programming 7.50 | Mot. Power Data 295 |
| NSC Memory Data 3.95 | Osborne Z80 Programming . 7.50 | Mot. Rectifier Data 2.95 |
| NSC MOS/LSI Data 3.95 | Ti Powr Semi's Data 7.50 | Mot. Switching Tran. 2.95 |
| NSC Power Transistors 2.95 | TI TTL Data 6.95 | Mot Zeners 2.95 |
| Intel Databook 3.95 | Ti Transistors & Diodes 8.50 | Basic Software SRI Vol. Lor II 24.95 |
| Intel MCS85 Manual 7.50 | T Memory Data 3.95 | Basic Software SRI Vol. III 39.95 |
| Intel MCS80 Manual 7.95 | Ti Optoelectronics 3.95 | Basic Software SRI Vol. IV or V 9.95 |
| Intel MCS40 Manual 4.95 | Ti Linear Data 3.95 | Basic Software SRI Vol. VI 49.95 |
| AMD 8080 Handbook 5.95 | T Bipolar Memory 3.95 | Basic Software SRI Vol. VII 39.95 |
| AMD Linear Data 4.95 | Ti Interface Data 4.95 | 1978 IC Master |
| AMD Schottky Data 4.95 | Motorola Semi Data 1, 2, 3 9,95 | ARTE OF SHEET PLANTS TO SHEET SHEET |
| | | |

6800 DESIGNER BOARDS MODULES PROTO BOARDS

| ★ Motorola Compatible Modules* | | |
|---------------------------------|---------|---|
| MEK 6800 D2 Kit | \$235.0 | 0 |
| 9600 6800 MPU Module | 495.0 | 0 |
| 9601 16 slot Mother Bd | 175.0 | 0 |
| 9602 16 slot Card Cage | 75.0 | 0 |
| 9603 8 slot Mother Bd | 99.0 | 0 |
| 9604 System Power Supply | 250.0 | 0 |
| 9610 Prototype Board | 36.0 | 0 |
| 9615 4KEprom Module | 250.0 | 0 |
| 9620 16 port parallel I/O | 375.0 | 0 |
| 9626 8K Static RAM | 295.0 | 0 |
| 9626K 8K Static RAM Kit | 225.0 | 0 |
| 9630 Extender Card | 60.0 | 0 |
| 9640 Multiple Tuner Prog | 395.0 | 0 |
| 9650 8 port Duplex Asyn. I/O | 395.0 | 0 |
| Mot 43/86 Connectors w/w or s/t | 5.9 | 5 |
| AMI EVK 99* 6800 sub Kit | 99.0 | 0 |
| | | |

| AMI EVK 200 Kit | 249.95 |
|------------------------------|--------|
| AMI EVK 300 Assembled | 275.00 |
| EVK Kluge Board | 95.00 |
| EVK 16K Byte Ram Board | 75.00 |
| EVK 6 Slot Motherboard | 35.00 |
| EVK Extender Board | 45.00 |
| EVK Solid Frame Chassis | 129.00 |
| EVK Connectors | 6.50 |
| AMI 6800 Proto Rom | 30.00 |
| AMI 6800 Micro Assembler Rom | 30.00 |
| 6800 Tiny Basic Paper Tape | 20.00 |
| 6800 Tiny Basic Eprom | 125.00 |
| ZILOG COMPATIBLE BOA | RDS |
| | |

| Z-80 CPU | 395.00 |
|---------------------|--------|
| ZDC Disc Controller | 395.00 |
| MEM 16/65K Memory | 595.00 |
| | |

THE FIRST TO OFFER PRIME PRODUCTS TO THE HOBBYIST AT FAIR PRICES NOW LOWERS PRICES EVEN FURTHER!

1. Proven Quality Factory tested products only, no re-tests or fallouts. Guaranteed money back. We stand behind our products.

2. Same Day Shipment All prepaid orders with cashiers check, money order or charge card will be shipped same day as received.

MICROPROCESSORS STATIC RAM HEADQUARTERS SUPPORT DEVICES \$21.95 29.95 19.95 24.95 19.95 12.95 18.95 14.95 21.95 29.95 89.95 Z-80 Z-80A F-8 (3850) 2650 CD1802 8080A SALE 8085 8008-1 2901 2901A TMS 9900JI

| Clock Gen | 3.95 | | 19.9 |
|------------------|-------|--|------|
| -4 (4MHz) | 9.75 | 6502 | 9 9 |
| Bus Driver | 3.95 | IM6100 2 | 99 |
| Bus Driver | 2.39 | 6800 1 | |
| Sys. Control | 6.95 | 6802P 3 | 2 9 |
| Sys. Cont. | | | |
| Prog I/O | 1150 | SOCKETS | |
| Int. Timer | | 8 Pin ww 32 14 Pin S/T | 2 |
| Prog I/O | | 14 Pin ww 37 16 Pin S/T | 2 |
| Prog. DMA | 27.95 | 16 Pin ww 38 18 Pin S/T | 3 |
| Prog. Int. | 27.95 | 18 Pin ww 60 22 Pin S/T | 3 |
| CRT Controller | | | 4 |
| Prog. Keyboard | 19.95 | | 4 |
| -1 128 x 8 RAM | | 22 Pin ww 93 28 Pin S/T 8 Pin S/T 17 40 Pin S/T | 6 |
| PIA | | 8 Pin 5/1 1/ 40 Pin 5/1 | |
| Priority Int. | | | |
| -1 512 x 8 Eprom | | CONNECTORS | |
| ACIA | | 6 Pin Single S/E | 1.4 |
| Senal Adapter | | 15/30 Dual S/E | 19 |
| /HD46505CRTContr | | 18/36 Dual S/E | 23 |
|) Modem | | 22/44 Dual S/E | 29 |
| Modulator | | 40/80 W/W | 4.9 |
| A 1.0MHz OSC | 25.95 | 43/86 Dual W/W/S/T | 6.5 |
| USRT | | 50/100 IMSAI W/W | 4.7 |
| Bus Driver | | 50/100 IMSAI S/T | 4.7 |
| SCD 1K RAM | 25.00 | 50/100 Altair W/W/S/T | 5.9 |
| SCD 250 x 4 RAM | | IMSAI Card Guides 4 | /10 |
| CD 32 x 8 RAM | | | |
| CD 8 bit 1/O | 10.95 | 25 Pin-D Subminature | 1 |
| | | | |

| PROMS | |
|-------------------|--|
| 270812.95 | |
| 2708-6 5.95 | |
| 1702A 4.95 | |
| 1702A-6 3.75 | |
| 2716-5V | |
| 2716-5V, 12V24.95 | |
| 2758 5V 25.95 | |
| 5203AQ 11.95 | |
| 5204AQ 9.95 | |
| 6834-112.95 | |
| IM 5610 2.95 | |
| 82S123 2.95 | |
| 82S126 4.50 | |
| | |

AM9511 Arith Processor AM9517 DMA Controller

RAMS DYN.

| 4116 16K x 1 | 18.9 |
|-----------------|------|
| 4115 8K x 1 | 11.9 |
| 4050 4K x 1 | 4.4 |
| 4060 4K x 1 | 4.4 |
| 4096 4K x 1 | 4.2 |
| | 4.9 |
| 2107B-4 4K x 1 | 4.2 |
| 5261 | 1.9 |
| 5262 | 1.9 |
| 5270 | 4.9 |
| 5280 | 4.9 |
| 1103 | |
| 4008L | 4.9 |
| TMS4070 16K x 1 | |
| 4027-3 | 4.9 |
| | |

ELOPPY DISK I/O

| CHARACTER GENERATORS | |
|---|--------------|
| uPd372 Nec Floppy 1781 Dual Floppy | 49.9 89.9 |
| 1771 I/O 8" only 1771-01 8" & Minifloppy | 22.9 |
| | |

| RO32513-001 (5V) Upper . | 9.50 |
|--------------------------|-------|
| RO32513-002 (5V) Lower | 10.95 |
| RO32513-ADM3 (5V) Lower | 14.95 |
| MCM6571 | 10.75 |
| MCM6571A | 10.75 |
| MCM6574 | 14.50 |
| MCM6575 | 14.50 |
| KEVROARD | |

ENCODERS

| AY5-2376 AY5-3600 | |
|-----------------------|-------|
| UARTS/USRTS | |
| TR1602B (5V, 12V) | 3.95 |
| AY51013 (5V, 12V) | 5.50 |
| AY51014A/1612 (5-14V) | |
| AY51015A/1863 (5V) | 6.95 |
| TMS 6011 (5V, 12V) | 5.50 |
| IM6402 | 9.95 |
| IM6403 | 9.95 |
| 2350 USRT | 9.95 |
| 1671B Astros | 24.95 |
| BAUD RATE | |
| | |

GENERATORS

| MC14411 | 11.25 |
|---------------------------|-------|
| 4702 | |
| WD1941 | 9.95 |
| TV CHIPS | |
| MM5320 TV Synch | 7.95 |
| MM5369 Prescaler | 3.95 |
| LM1889 Modulator | 3.95 |
| CW300 Saw Function | 1.50 |
| MM57100 Coldr TV Game | 6.95 |
| MM57104 Clock | 3.75 |
| AY38500-1 TV Game | 5.95 |
| AY38600 Color TV Game | 24 95 |
| AY38615-1 Color Converter | 8.95 |
| AY38700-1 Tank Chip | 29.95 |
| RF Modulator with Audio | 8.95 |
| A/D CONVERTER | S |

| 8700 | 8 bit Binary | 13.5 |
|--------|-------------------|-------|
| 8701 | 10 bit Binary | 22 0 |
| 8702 | 12 bit Binary | 36.9 |
| 8705 | 12 bit TS | 42.9 |
| 9400 | Volt to Freq Conv | 7.2 |
| 8750 | 3-1/2 Digit BCD | 13.9 |
| 8038 | Multifunction | 30 |
| 1408L6 | 6 bit | 3.9 |
| 1408L8 | 8 bit | 5.5 |
| DACOI | A/D | . 5.9 |
| | | |

TV INTERFACES

| Pixie-Verter | 8.5 |
|------------------------------|--------|
| Pixie-vener | |
| TV-1 Video Interface | 8.9 |
| Pickles & Trout TV Mod. Kit. | 20.0 |
| Multiverter | 35.0 |
| M&R Modulator | . 35.0 |

| 21L02 250ns | 1.59 | 1.55 | 1 45 |
|--|--------------|------------|-------|
| 2102 | 1.25 | 1.15 | |
| 2102 91L02APC | | | |
| 21L11-1 | 4 10 | 3.95 | 3.75 |
| | 3.75 | | |
| 21L12-1 | 4 25 | 4 10 | 3.95 |
| | 2 95 | 2.85 | 2.65 |
| 21L01-1 | 3.95 2.90 | 3.75 | 3.65 |
| 2101-1 | 2 90 | 270 | 2.55 |
| 2114-3 300ns | 9.95 | 9.75 | 8.25 |
| 2114-4 450ns | 7 95 | 7.50 | 5.50 |
| 2114-3 300ns 2114-4 450ns TMS4044 TMS4045 EMM4200A | 9.95 | 9.75 | 8 25 |
| TMS4045 | 9.95 | 9.75 | 8 25 |
| EMM4200A | 12.50 | 11.95 | 9 95 |
| EMM4402 5101C-E upd410 (4200) | 7.95 | 7.25 | 6.25 |
| 5101C-E | 7.95 | 7.95 | 7 25 |
| upd410 (4200) | 10 95 | 10.25 | 9 25 |
| AMD9140/41 | 10.95 | 10.25 | 9 25 |
| AMD9140/41 AMD9130/31 | 12.95 | 11.95 | 10.25 |
| FSC 460/46416K | CCD Only ! | \$18.95 Ea | ich |
| 1101 | | | |
| P2125/93425 (45 | ns 1 7 95 | 7.35 | 7.25 |

| 8 Pin S/T | 17 | 40 P | n S/T | 63 |
|--------------|-------|------|-------|-------|
| CONNE | СТ | DRS | | |
| 6 Pin Single | e S/E | | | 1.49 |
| 15/30 Dual | S/E | | | 1.95 |
| 18/36 Dual | S/E | | | 2.35 |
| 22/44 Dual | S/E . | | | 2.95 |
| 40/80 W/W | | | | 4.95 |
| 43/86 Dua | W/W/ | S/T | | 6.50 |
| 50/100 IMS | | | | 4.75 |
| 50/100 IM: | | | | 4.75 |
| 50/100 Alta | | | | 5.95 |
| IMSAI Card | Guide | S | . 4 | /1 00 |
| Inc. o | | | | 1 |

3.25 3.75 1.25 6.50

NEW CTS DIPSWITCHES

CTS206-4 \$1.75 CTS208-8 \$1.95 CTS206-5 \$1.75 CTS209-9 \$1.95 CTS206-6 \$1.75 CTS209-10 \$1.95 CTS207-7 \$1.75 8080 USER'S

IT'S HERE LIVERMORE BASIC ON 65K ROM THAT'S RIGHT ON ROM!!!

OUR PRICE only . \$95.00

| PROGRAMMABLE RACTER GENERATOR |
|---|
| nottest version of RWARS available. |
| D Compatible 2MHz Kit object code on tarbell |

NAKED PC BOARD

| | SALE S-100 | | |
|---|----------------------------|-------|--|
| ı | Z-80 CPU (ITHACA) | 34.95 | |
| | Z-80 CPU (TDL comp.) | 34.95 | |
| | 8080A CPU | 34.95 | |
| | 8K Static Logos | 21.95 | |
| | 8K Eprom Byteuser | | |
| ı | 32 Static S-100 | 59.95 | |
| ı | Tarbell Floppy I/O | 39.95 | |
| | Tarbell Cassette | 29.95 | |
| | Vector 8800 Proto | 19.95 | |
| | ACP Proto Bd | 27.95 | |
| | ACP Extender w/conn | 15.95 | |
| | Realtime Clock | 34.95 | |
| | WMC 13 Slot Mother Bd. | 33.00 | |
| | S-100 8 Slot Mother Bd | 34.95 | |
| | Vector 8803 11 Slot M. Bd. | 29.95 | |
| | SSM Video I/O | | |
| | SSM IO2 Parallel I/O | 27.95 | |

| ATTENTION KIM USERS | |
|--|-----------|
| KIMSAI-expansion to S-100 125 00 K | 4/165.00 |
| KIMSI to KIM Connector | 5.75/pail |
| KIM 1 6502 Single Board Computer | 245.00 |
| KIM 1 Power Supply | 89.00 |
| KIM Memory Plus - (consists of 8K Ram. | |
| 8K 2716 Eprom. Programmer. I/O etc.) | 245 00 |
| KIM SOFTWARE | |
| Please package (cassette) 12 games | 16.95 |
| Help Editor package (cassette) | 16.95 |
| Help Mailing List pkg (cassette) | 16.95 |
| Help Info Retrival pkg. (cassette) | 16.95 |
| Microchess (cassette) | 16.95 |
| Microaid Assembly/Disassem/Editor | 27.95 |
| Microaid Source Listing (cassette) | 27.95 |
| | |

ATTENTION PET USERS Includes (4) Conne nsion, IEEE 488 I/O. parallel user port

| with contacts. | 6.95 |
|--|--------------|
| ATTENTION APPLE II | USERS |
| APPLE II w/16K (get a spare) 416/4116 16K Memory Module | \$1125.00 |
| Roppy Disc II w/Controller | 495.00 |
| Applesoft II Firmware Card | 100 00 |
| Video Monitor II (B/W) | 205 00 |
| Printer Centronics Micro | 695.00 |
| Printer Centronics 779 | 1445 00 |
| Apple II Prototype Board | 24 00 |
| Parallel Interface Card | 180 00 |
| Communications Interface Card | 180 00 |
| PR40 Printer I/O w/cassette | 49 95 |
| 2716 Eprom Burner | 89.95 |
| requires 2716 Socket Adaptor | 10 00 |
| Apple II to MFE tape I/O | 197.50 |
| Coresident Assembler cassette | 1995 |
| Apple II Softech Software Exchang | e Membership |
| includes 8 pack of cassettes | 39.95 |



WAVEFORM CENERATORS

| WATER ORM GENERATORS | | |
|---------------------------|------|--|
| 8038 Function Gen | 3 95 | |
| MC4024 VCO | 2.45 | |
| LM566 VCO | 1 75 | |
| XR2206 Function Generator | 5.25 | |

CHARGE COUPLED

\$18.95 each (reg. 43.00)

CRYSTALS

| microproc | 62201 11 | Hennes IA OF | iiiie |
|-------------|----------|--------------|---------|
| Frequency | Price | Frequency | Price |
| 1 OMHz | \$5.85 | 6.0MHz | \$ 4.95 |
| 1.8432 | 4.95 | 6 144 | 4 95 |
| 2 OMHz | 5.85 | 6.5536 | 4 95 |
| 2.01MHz | 2.95 | 10.0MHz | 4.95 |
| 2 097152MHz | 5.85 | 13.0MHz | 4.95 |
| 2.4576MHz | 5.85 | 14.31818 | 4.95 |
| 3.579545MHz | 1.50 | 18 OMHz | 4 95 |
| 4 OMH; | 4.95 | 18.432MHz | 5.95 |
| 4 194304MHz | 5 95 | 20 OMHz | 4.95 |
| 4.91520MHz | 5.95 | 22.1184MHz | 5.95 |
| 5.0MHz | 4.95 | 27 OMHz | 5.95 |
| 5 0668 | 4.95 | 36 OMHz | 5.95 |
| 5.7.143MHz | 5.95 | 48 OMHz | 5.95 |
| | | LOOKE | 12.06 |

DISDI AVS/OPTO

| DISPLATS/OFT | • |
|------------------------------|--------|
| DL 704/707/CC/CA 300 | 1 25 |
| FND359 CC .357 | 95 |
| FND 500/507/CC/CA 500 | 1.35 |
| FND 503/510 CC/CA 500 | 95 |
| FND 800/807 CC/CA 800 | 2.50 |
| Bowmar 9 digit bubble | .99 |
| FSC 8024 4 digit CC 800 | |
| HP7340 HEX Display | |
| TIL 305 5 x 7 Array | |
| TIL 306 7 seg w/logic | |
| TIL 308 7 seg w/logic | |
| TIL 309 7 seg w/logic | |
| TIL 311 HEX Display | 12.95 |
| MA 1003 12 auto clock | 17.95 |
| MA 1002 4 digit clock module | |
| MA 1010 4 digit clock module | 9.95 |
| NSN 373/374 dual CC/CA 300 | |
| NSN 583/584 dual CC/CA 500 | 2.60 |
| NSN 783/784 dual CC/CA 700 | 3 00 |
| 4N25 Opto Isolater | 1 10 |
| MCT 2 Opto Isolater | |
| 4N33 Darlington ISOL | 1.75 |
| Red Led's 185 Dia | 5/1.00 |
| Green/Yellow | 4/1 00 |
| HP 5082/7731 7 seq | .90 |
| | |

| MUNITELY SPECIALS | • |
|-----------------------------|--------------|
| 14 Pin S/T sockets 1000 pcs | 10 |
| 16 Pin S/T sockets 1000 pcs | 1 |
| 22 Pin S/T sockets 1000 pcs | 1: |
| FSC460/464 16K CCD's | 18.95 |
| AMD 9140CDC Static Ram | 10.9 |
| 4116/416 16K Dynamic Ram's | 8 for/149.9: |
| 1488 or 1489 RS232 Driver | 125 |
| 8T97 Buffer | 1.25 |
| 8130 or 8131 | 2.45 |
| 8833 or 8835 | 1.99 |
| 74367 or 74368 | 6/5.00 |
| 75451/52/53 | 10/2.56 |
| 8T26 Bus Driver | 2.3 |
| 78L05 Regulator | 2/1.0 |
| MCT2 Optoisolator | 8 |
| 2510A Shift Register | 29 |
| 2519A Shift Register | 29 |
| MM5056 Shift Register | 2.9 |
| LM760N-14 Compartor | 1.1 |
| DS0025CN Clock Driver | 1.4 |
| DS0026CN Clock Driver | 2.5 |
| 8T20 Bidirect oneshot | 3.4 |
| 1403AN Shift Register | 1.50 |
| 9368 | 2.95 |

NEW 1978 CATALOGUE SEND 25¢ POSTAGE

DISCOUNT COMPUTER

| CORNER | Discount Cash | Computer Credit Card |
|-------------------------|------------------|-------------------------|
| Apple II/16K | \$1125.00 | \$1155.00 |
| TEI PT208 | 4599.00 | |
| TELMCS122 | 450.00 | 462.00 |
| Cromemco Z-2 | 536 00 | 551.00 |
| Cromemco SYS III | 5499.00 | 5561.00 |
| Decwriter II | 1475.00 | |
| Persoi 277 | 1230 00 | 1266.00 |
| Shugart 800/801 | 495.00 | 512.00 |
| Pertec FD200 | 299.00 | 319.00 |
| MFE Dual 751 | 730.00 | 744.95 |
| Shugart 400 | 325.00 | 315.00 |
| Honzon I | 1439.00 | 1479.00 |
| North Star | 599.00 | |
| Low Cost S-100 Bus | 149.95 | |
| ADM 3 Assem | 829.95 | |
| Soror: IO 120 | 895.00 | |
| Teletype Model 43 | 1199.00 | |
| AM100 | | ct sales desk |
| lmsa w/22 stots | 599.00 | |
| Oliver 2708/16 Programm | 275.00 | |
| Pennywhistle Modem | 129 95 | 129.95 |
| Cromemco 16K Ram | 449.00 | |
| Hazeltine 1500 | 1175 00 | |
| Okidata 110 w/TFR5232 | 1675.00 | |
| Okidata 22 w/TFR5232 | 2705.00 | 2810.00 |
| MEK 6800 D2 Kit | 235.00 | Same |
| KIM 6502 | 229.95 | Same |
| Intercept Jr 6100 | 281.00 | Same |
| Technico 9900 Kit | 299.00 | |
| RCA VIP Cosmac | 249.00 | |
| Rockwell AIM | 375.00 | Same |

Irvine, California 92713 New Phone (714) 558-8813 P.O.BOX 17329 TWX: 910-595-1565 Retail Store Open Mon. — Sat. Located at 1310 "B" E. Edinger, Santa Ana, CA 92705



ELPAC POWER SUPPLIES

Completely Assembled

SPECIFICATIONS:

105-125/210-250 Vac, 47-440 Hz Input:
putation
quistion
tipple and Noise
tiput Isolation
retult Current
35% rated current
35% rated current Line Regulation
Load Regulation
Output Ripple and Noise
Input/Output Isolation
Short Circuit Current

PART NO. RATINGS PRICE WATTS VOLTS AMPS 5 12 5 12 \$36.95 36.95 59.95 59.95 9.95 SOLV15-5* SOLV15-12* SOLV30-5 SOLV30-12 3 1.5 6 3 OVP1 over voltage protection for SOLV30-5,-12 *SOLV15-5, 12 includes OVP installed 30

NEW! BULB-ENERGY SAVER



BULB-ENERGY SAVERS used for years by major industrial users — now available for home or office use. Bulb Savers can cut electrical bills by as much as 3%.
BULB-SAVERS lengthens light life by:

 Acting as an electrical "shock absorber" turns the bulb on slowly, eliminating th "thermal shock". Bulb life increases 300 per Bulb lasts 3 or

nt. Banishes Current "Surges". Cushions line Itage surges when other loads cut power 1-9 10+ BES-1 1.39 ea. 1.20 line.
3. Reduces Energy Consumption

| | ODVOTA | | |
|----------------|-----------------------------|--------------|--------------|
| | CRYSTA THESE FREQUENCIES | LS | |
| PART NO. | FREQUENCY | CASE | PRICE |
| CY1A CY1.84 | 1.000MHz 1.8432MHz | HC33 HC33 | 5.95 5.95 |

| | THESE FREQUENCIES | | 2 |
|----------|-------------------|------|-------|
| PART NO. | FREQUENCY | CASE | PRICE |
| CY1A | 1.000MHz | HC33 | 5.95 |
| CY1.84 | 1.8432MHz | HC33 | 5.95 |
| CY2A | 2.000MHz | HC33 | 5.95 |
| CY2.01 | 2.010MHz | HC33 | 1.95 |
| CY2.50 | 2.500MHz | HC33 | 4.95 |
| CY3.27 | 3.2768MHz | HC33 | 4.95 |
| CY3.57 | 3.579545MHz | HC33 | 4.95 |
| CY3A | 4.000MHz | HC18 | 4.95 |
| CY4.91 | 4.916MHz | HC18 | 4.95 |
| CY7A | 5.000MHz | HC18 | 4.95 |
| CY5.18 | 5.185MHz | HC18 | 4.95 |
| CY6.14 | 6.144MHz | HC18 | 4.95 |
| CY6.40 | 6.400MHz | HC18 | 4.95 |
| CY6.55 | 6.5536MHz | HC18 | 4.95 |
| CY12A | 10.000MHz | HC18 | 4.95 |
| CY14A | 14.31818MHz | HC18 | 4.95 |
| CY19A | 18.000MHz | HC18 | 4.95 |
| CY18.43 | 18.432MHz | HC18 | 4.95 |
| CY22A | 20.000MHz | HC18 | 4.95 |
| CY30A | 32.000MHz | HC18 | 4.95 |



TRIMMERS

10MM size trimmers -.394" Dia. Part No. 1-9 10-24 25-49 100+ TR-11(valve).35 .30 .25 20

100, 500, 1K, 2K, 5K, 10K, 20K, 50K, 100K, 200K, 1 meg



TRIMPOTS Single-Turn - 1/2 Watt

Square - Top Adjust - 3/8" Size Part No. 1-9 10-24 25-49 50-99 840P(value) .99 .89 .80 .70

nce Values - 50, 100, 500, 1K, 2K, 5K, 10K, 20K, 50K, 100K, 200K, 500K, 1 meg. 15-Turn - 3/4 Watt

Rectangular Side Adjust 3/4" x 1/4" Size **Part No. 1-9 10-24 25-49 50-99** 830P(value) 1.35 1.25 1.20 1.15

Resistance Values - 50, 100, 500, 1K, 2K, 5K, 10K, 20K, 50K, 100K, 200K, 500K, 1 meg

| ***** | 1/16 VECT | OR E | BOAR | D | | |
|-------------|-------------------|------|--------|------|-------|---|
| ****** | 0.1" Hole Spacing | P-P | attern | F | rice | |
| ***** | Part No. | L | W | 1-9 | 10 up | |
| PHENOLIC | 64P44 062XXXP | 4.50 | 6.50 | 1.72 | 1.54 | |
| | 169P44 062XXXP | 4.50 | 17.00 | 3.69 | 3.32 | |
| EPOXY | 64P44 062WE | 4.50 | 6.50 | 2.07 | 1.86 | |
| GLASS | 84P44 062WE | 4.50 | 8.50 | 2.56 | 2.31 | |
| | 169P44 062WE | 4.50 | 17.00 | 5.04 | 4.53 | |
| | 169P84 062WE | 8.50 | 17.00 | 9.23 | 8.26 | - |
| EPOXY GLASS | 169P44 062WEC1 | 4.50 | 17.00 | 6.80 | 6.12 | • |
| | | | | | | |



CONNECTORS 25 Pin-D Subminiature

DB25P(as pictured) DB25S
 SOCKET
 4.95

 Cover for DB25 P or S
 1.75
 DB51226-1

MOLEX CONNECTOR PINS




M-530-1


\$1.95/100 pins (minimum order) \$16.00/1000 pins

Pre-packaged in strips

INSTRUMENT/ CLOCK CASE njection molded unit. omplete with red bezel.

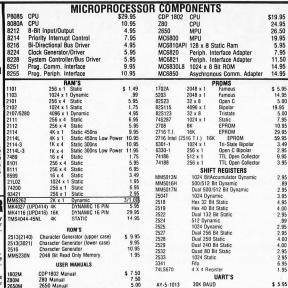

| .000111 | | | | | | | | | |
|--|----------------|---|---|---------------------------------------|-----------------------------------|--|----------------------------------|--|-----------------------------------|
| TELEPHONE | | SPE | CIAL | REQU | ESTED | ITEM | SCELLAN | EOUS | |
| KEYBOARD CHIP AY-5-9100 \$14.9 AY-5-9200 14.9 AY-5-9500 4.9 | 95 95 95 | ICM7045 ICM7205 ICM7207 ICM7208 ICM7209 | \$24.95 19.95 7.50 19.95 6.95 | MEMO MCM6571 MCM6574 MCM6575 | RIES \$13.50 13.50 13.50 | 11C90 MC3061P MC1408L7 MC1408L8 | \$19.95 11.95 4.95 5.75 | MK40240 DS0026CH TIL308 95H90 | \$17.50 3.75 10.20 11.95 |
| AY-5-2376 14.9 HD0165 7.9 74C922 9.9 | 95 | TV GAME | CHIP SET | 2.010 MH2 | Crystal \$7.95 | LD110, MC401 4N33 | 6(74416) | \$25.00/se 7.50 3.95 | |
| IN |) | | 1 | ` | | The Sir | ıclai | r PDN | 135. |

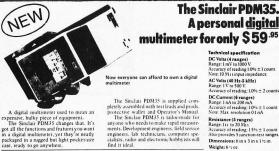

Now everyone can afford to own a digital

PDM35 PDM-AC

PDM-DP

PRECISION

1.999

.

Model 2800

\$99.95

DESCRIPTION Digital Multimeter (Comp

31/2-Digit Portable DMM

Overload Protected

II7volt AC Adapter Deluxe padded carrying case

6.95 6.95

100 MHz 8-Digit Counter

A personal digital

Technical specification
DC Volts (4 ranges)
Range: 1 mV to 1000 V.
Accuracy of reading 1.0% ± 1 co
Note: 10 M (1) input impedance

Note: 10 M (1) input impedance AC Volts (40 Hz-5 kHz) Range: 1V to 500 V. Accuracy of reading: 1.0% ± 2 o DC Current (6 ranges) Range: 1n Ato 200 mA Accuracy of reading: 1.0% ± 1 o Note: Max resolution 0.1 nA.

Resistance (5 ranges)
Range: 1(1 to 20 Mr.).
Accuracy of reading: 1.5% ± 1 count
Also provides 5 junction-test ranges.

Dimensions: 6 in x 3 in x 1½ in Weight: 6½ oz. Power supply; 9 V battery or Sinclair AC adapter. (Battery not Sockets: Standard 4 mm for resilient plugs.

Options: AC adapter for II7 V 60 Hz power De-luxe padded carrying wallet.

Overload Protected
'3 "high LED Display
Battery or AC operation
Auto Zeroing
Inn. 1Va. 0 I ohm resolution
Overange reading
10 meg input impendence
DC Accuracy 1"- typical
Ranges: DC Voltage - 0:1000V
AC Voltage 10:1000V
Freq. Response: 50-400 HZ
DC/AC Current io.1000A DC/AC Current: 0-100mA Resistance 0-10 meg ohm Size: 6.4" x 4.4" x 2"

Accessories: AC Adapter BC-28

Rechargeable Batteries BP-26 leads, operating manual and spare fuse Carrying Case LC-28 7.50 ---

\$59.95

20 Hz-100 MHz Range Four power souces, i.e. 6° LED Display batteries, 110 or 220V with Crystal-controlled timebase charger 12V with auto Forlable — completely 7.2-10V power supply

• Size — 1.75" x 7.38" MAX-100 \$134.95



ACCESSORIES FOR MAX 100: Mobile Charger Eliminato Model 100 - CLA \$3.95 r battery

Charger/Eliminator use 110 V AC

63-Key Unencoded KEYBOARDS Hexadecimal Encoder



This is a 63-key, terminal keyboard newly manufactured by a large computer manufacturer. It is unencoded with SPST keys, unat-tached to any kind of PC board. A very solid molded plastic 13 x 4" base suits most applica-\$29.95/each

19-key pad includes 1-10 keys, ABCDEF and 2 optional keys and a shift key. \$10.95/each

\$5.00 Minimum Order — U.S. Funds Only California Residents — Add 6% Sales Tax

Spec Sheets – 25¢ 1978 A Catalog Available—Send 41¢ stamp





PHONE **ORDERS** WELCOME (415) 592-8097

MAIL ORDER ELECTRONICS - WORLDWIDE **HOWARD AVENUE, SAN CARLOS, CA 94070 Advertised Prices Good Thru September**

11

The Incredible

"Pennywhistle 103"

\$139.95 Kit Only

The Pennywhistle 103 is capable of recording data to and from audio tape without critical speed requirements for the recorder and it is able to communicate directly with another modern and terminal for telephone "hamming" and communications for the deal. In addition, it is free of critical adjustments and is built with non-precision, readily available parts.

Data Transmission MethodFrequency-Shift Keying, full-duplex (half-duplex)

.300 Baud. Maximum Data Rate.......... optoisolated and non-polar).

120 VAC, single phase, 10 Watts.

All components mount on a single 5" by 9' printed circuit board. All components included.

Frequency Counter and/or Oscilloscope to align.

The original the 3rd Hand \$9.95 each 15



*Leaves two hands free for

working Clamps on edge of bench, table or work bench Position board on angle or flat

position for soldering or clipping Sturdy, aluminum construction for hobbyist, manufacturer or school rooms

DIGITAL STOPWATCH

Bright 6 Dight LED Display
Times to 59 minutes 59.59 seconds
Crystal Controlled Time Base
Three Stopwatches in One
Times Single Event — Split & Taylor
Size 4.5 "x 2.15" x .90" (44) ounces)
Uses 3 Penite Cells

Kit -\$39.95 Assembled - \$49.95

Heavy Duty Carry Case \$5.95







New Bipolar Unit
 Auto Zeroing

Auto Polarity

5" LFD Model KB500 DPM Kit

Low Power
 Single IC Unit

\$49.00 Model KB503 5V Power Kit

\$17.50 JE700 CLOCK



KIT ONLY \$16.95

JE803 PROBE

115 VAC

The Logic Probe is a unit which is for the most part, indespensible in trouble shooting logic families TL. DTL RTL. CMOS it derives the power if meets to operate directly did of the cround under test drawing a scant 10 mA max. It uses a MAN3 readout to indicate any of the following states by these symbols: (H) - 1 L(OW) - o [PULSE] - P. The Probe can detect high frequency pulses to a SMIzt. It can 1 be used at MOS levels or circuit damage printed circuit honore. The Logic Probe is a unit which is for the most par



printed circuit board



T2L 5V 1A Supply

This is a standard TTL power supply using the well known LM309K regulator it to provide a solial 1 AMP of current at 5 volts. We try to make things easy for you by providing everything you need in one package, including the hardware for only JE225 \$9.95 Per Kit

<u>-</u> **PROTO BOARDS**



\$ 19.95 PB100 - 4.5" x 6" PB101 - 5.8" x 4.5" 29.95 PB102 - 7" x 4.5" PB103 - 9" x 6" 39.95 PB104 - 9.5" x 8" PB203 - 9.75 x 6½ x 2¾



59.95 79 95 80.00 PB203A - 9.75 x 6½ x 2¾ 129.95 PROTO CLIPS

14 PIN \$4.50 16 PIN 4.75 24 PIN 8 50 13.7

SALE

POLY PAKS'

WE'RE FIGHTING BACK INFLATION WITH THIS EXCLUSIVE 1¢ SALE BUY 1 AT SALE PRICE, GET 2ND FOR 1C MORE!!!

THIS SPECIAL ONE CENT SALE IS FOR MAGAZINE ADS ONLY

LED **WATCH GUTS** \$1.95 \$1.96



Factory "lay-arounds." Do they work? Who knows! A micro digital technicians bonanza. The complete guts are there. With black case and leatherstet band. 5 functions: HOURS, MINUTES, SECONDS, MONTH, & DATE, Sorry, no specs.

26538535

IMAGINE GETTING A CALCULATOR REJECT FOR ONLY A PENNY!!!!

\$5.95 S5.96 LED OR FLUORESCENT CALCULATOR GAMBLE!

PARTS
ALOUAIUN GAMBLE:

CANT LOSE: Factory dumps be production-line rejects and customs. We see that these prices with these prices with these prices college. The production of the production

| | PF |
|--|--|
| PARTS & SEMI"ONE CENTERS" | |
| Ourse Decordation (Onder by Cat No. in necesticals) | |
| 1-40 CHANNEL CB SELECTOR, w/knob, for PLL Circuits (#9K5045). 1.00 1-23 CHANNEL CB SELECTOR, w/knob, for PLL Circuits (#9K5044). 1.00 20 for 1.01 15-"POP" OPTICAL LENSES, plano-convex, 1" dis, plastic (#9K5044). 1.00 20 for 1.01 15-"POP" OPTICAL LENSES, plano-convex, 1" dis, plastic (#9K5044). 1.19 2 for 1.20 10-IC "DICE", microscopic circuits, teaches theory (#9K5045). 1.19 2 for 1.20 10-IC "DICE", microscopic circuits, teaches theory (#9K5045). 1.19 2 for 1.20 10-IC "DICE", microscopic circuits, teaches theory (#9K5045). 1.00 20 for 1.01 1-ICD WATCH QUTS, men"s, how good? We don't know (#9K5267). 1.85 2 for 1.95 1-ICD WATCH QUTS, men"s, how good? We don't know (#9K5267). 1.00 20 for 1.01 1-ICD WATCH QUTS, men"s, how good? We don't know (#9K5267). 1.00 20 for 1.01 1-ICD WATCH CHARLES, so to pa typic (#9K1495). 1.00 20 for 1.01 1-ICD WATCH CHARLES, soprox for marker gen. (#9K3869). 1.00 20 for 1.01 1-ICD WATCH CHARLES, papers (#9K3968). 1.00 20 for 1.01 1-ICD WATCH CHARLES, papers (#9K3968). 1.00 20 for 1.01 1-ICD WATCH CHARLES, papers (#9K3968). 1.00 20 for 1.01 1-ICD WATCH CHARLES, papers (#9K3968). 1.00 20 for 1.01 1-ICD WATCH CHARLES, papers (#9K3968). 1.00 20 for 1.0 | Order By Cat. TTL |
| □ 1-23 CHANNEL CB SELECTOR, w/knob, for PLL & xtal (#9K5044) | No. 9K1981 |
| 10-IC "DICE", microscopic circuits, teaches theory (#9K5065) | & Type No. Each |
| 1-LED WATCH GUTS, men's, how good? We don't know (#9K5267) | D SN7401 .19 D SN7403 .25 |
| 1-UHF TUNER, solid state, standard type (#9K2927) | □ SN7404 .19 □ SN7405 .19 |
| - 4-TANTALUM CAPACITORS, 6.8 uF 35V, dipped (#9K5281) | □ SN7406 .19 |
| 1-100KHZ MARKER CRYSTALS, approx for marker gen. (#9K3896) | □ SN7407 .39 □ SN7409 .39 |
| □ 1-48-PIN EDGE CONNECTOR, .156" spacing (#9K3963) | © SN7410 .25 © SN7416 .35 |
| ☐ 1-SPST RELAY, norm, open 12-24 VDC, 1250 ohms, dip style (#9K5175) | © \$N7417 .35 © \$N7420 .32 |
| DUAL GATE MOSFET, sim. to 3N200, 3N187, for RF & Mixer (#9K5101) | D \$N7421 .49 D \$N7423 .29 |
| 2-LCD THERMAL INDICATORS, 88-108"F, 7x1", flexible (#9K5195) | □ SN7426 .19 |
| □ 1-EECO THUMBWHEEL SWITCH, BCD, 0-7 (#9K2870A) | © \$N7430 .29 © \$N7437 .19 |
| 2.9V NI-CAD CHARGER PAK, plug-in, 125ma, 125 VAC pri (#9K4098) | □ \$N7438 .25 □ \$N7440 .19 |
| □ 75-SN7400 TTL ICs, untested 50X+ yield, pop types (#9K2415) | □ SN7443 .59 □ SN7444 .19 |
| □ 30-LM380 AUDIO IC's, 2 watts on-a-dip 50X+ yield (#9K5284) | □ SN7446 1.25 □ SN7450 .19 |
| 100-TTLs & LiNEAR MIXED, with 7400s, 50X+ yield (#9K2431) | □ SN7451 .19 □ SN7453 .19 |
| 1 -8-TRACK TAPE HEAD, with plug' n' cord (#9K3468) | □ SN7454 .29 |
| □ 150-PREFORMED DISC CAPACITORS, mark-d values, asst'd (#9K2605) | □ SN7460 .35 |
| © 60-YELLOW JACKET MYLAR CAPACITORS, marked, pop values (#9K3476) | □ SN7462 .35 □ SN7464 .19 |
| □ 75-CARBOFILM RESISTORS, ¼, ½ watt, 5 & 10%, marked, asst's (#9K3534)2.00 150 for 2.01 □ 250-UNMARKED CAPACITORS, polystyrene, molded, pop values (#9K3805)2.00 500 for 2.01 | |
| 300-SILICON SIGNAL DIODES, micro, glass, zeners tool 50% yield (#9K2628)2.00 600 for 2.01 | POP-AM |
| 100-IN4148/914 SWITCHING DIODES, 50X+ yield. Untested! (#9K2418) | |
| 15-SLIDE VOLUME CONTROLS, asst'd values, duals, singles (#9K3057) | Case code: T=TO Type No. Each 2 |
| □ 75-4" CABLE TIES, plastic, like "Ty-wrap" (#9K5218) | □ LM300H \$.79 \$ |
| □ 100-TERMINAL STRIPS, from 2 lugs up (#9K3136) | ☐ LM300N .49 ☐ LM301V .45 |
| □ 40-ft. SHIELDED CABLE, 1 cond, mikes, phonos, (#9K3577) | ☐ LM301H .45 ☐ LM307V .45 |
| 10-CB CRYSTALS, for phase lock loop, HAM, HC/18 (#9K5050) | ☐ LM308V .29 ☐ LM308H .69 |
| 100-CAPACITOR SPECIAL, discs, mylar, lytics, more (#9K2738) | □ LM308H .69 □ LM309K 1.49 1 □ LM311V .29 |
| 10-YOLTAGE REGULATORS, hobby LM320, 340, T0-3 (#9K3330) | ☐ LM311H 1.49 1 |
| 200-RESISTOR SPECIAL, ¼ to 1W, carbon, metal (#9K3054) | □ LM320H-5 .99 1 |
| 100-NATIONAL IC BONANZA, linears, 7400a ROMS (#9K2860) | ☐ LM320H-12 .99 1 ☐ LM320H-15 .99 1 |
| 100-POLYSTYRENE CAPS, asst'd values, voltage, hi-Q (#9K2729) | ☐ LM320T-6 1.49 1 ☐ LM322N 1.19 1 |
| 20-BRIDGES, untested, 2, 4, 6, amp, full wave (#9K4022) | ☐ LM324N 1.79 1 ☐ LM339N 1.79 1 |
| □ 15-MIXED READOUTS, hobby, untested, .127, .3, .5, etc. (#9K3619) | □ LM340K-5 1.49 1 □ LM340K-6 1.49 1 |
| 150-QUARTER WATTERS, resistors, metal film, marked (#9K3413) | ☐ LM340K-8 1.49 1 |
| 200-PREFORMED RESISTORS, ¼, ½, 1W, marked, asst'd (#9K2608) | ☐ LM340K-15 1.49 1 |
| GO-DIPPED MYLARS, shiny finish, asst'd values (#9K2597) | ☐ LM340K-18 1.49 1 ☐ LM340K-24 1.49 1 |
| □ 30-CLOCK CHIPS, National, hobby & untested, alarm (#9K5089) | PENNIES |
| □ 30 MMS282 2K RAMS, hobby, untested (#9K3940). 2.00 60 (for 2.01 □ 10-PUSH SWITCHES, push-te-break, spst, alarms (#9K5289). 2.00 20 of 2.01 □ 25-CD-4000 SERIES CMOS, untested, 50% useable yield (#9K5284). 2.00 50 for 2.01 | Type Description |
| □ 1-CHARACTER GENERATOR, 5 x 7 Mostek MK 2002P (#9K3898). 4.95 2 for 4.96 □ 1-CONDENSER MIKES, sensitive, 500 ohms 1.5 Volts (#9K3178). 4.95 2 for 4.96 | D 1103 1K Dynamic R D 5202 2K Prom |
| 7 SECMENT DEADOUTS | 0 5262 2K x 1 Dynam 0 1702A 256 x 8 EPRO |
| | □ MM5280' 4K x 1 Dynam |
| 3 to Digit LCD WRISTWATCH DISPLAY (#983960). 3 for \$1.19 6 for \$1.20 | 1N4000 Epoxy |
| MAN-3 BUBBLE READOUT, .19" red. com, cath. (#9K3338) | Cat. No. Type Volts |
| D FND-10 BLOCK READOUT, .122" com cathode (#9K2082) | 9K2377 1N4001 50 |
| □ FND-503, .5" red, com cathoda, 7-sex. (#982949) | □ 9K2379 1N4003 200 |
| □ FND-500, .5" red, com anode, 7 seg. (#9K2950) | □ 9K2381 1N4005 600 |
| | 9K2382 1N4006 800 9K2383 1N4007 1000 |
| RELAYS! Each 2 for | BULLET RECTIF |
| □ 1-SPST 24V REED RELAY, norm open, dip style, 1250 ohms (#9K5175) 1.49 | Order by Cat. No. SKEOREA |
| AMPLIFIERS! Each 2 for | 1.5 AMP |
| 9 WATTS ON A CHIP, Toshibs TA7205 (#9K5057) | □ 100V 10 for \$.59 |
| | 400V 10 for .79 |
| DIP SWITCHES! Each 2 for 5 switches on A DIP [#98 3668] 5.775 78 FULL WAVE BRIDGE 3 switches on A DIP [#98 3671] 1.29 1.30 Order by Cat. No. 982474 a voltage | *************** |
| 3 SWITCHES ON A DIP #9K 3669 | |
| IC SOCKETS! Order by Cat. No. 9K2447 & voltage + PRV Sale 2 for + | RIBBON CABLE |
| IC SOCKETS! | Order by Cat. and Conductors 9K3939 |
| 1 0 14-PIN DIP (#9K1308) | Cat- |
| □ 18-PIN DIP (#9K3378) | 26 Sale 1¢ Sal 34 4-ft. 1.98 8-ft. 1.9 40 3-ft. 1.98 6-ft. 1.9 |
| 0 28 DIN MEI/DID (#0K2007) 2 for 1 10 A for 1 20 7 1000 2 7E 2 76 7L | |
| Terms: Add postage Rated: net 30 REPLANT LEDS: | 1.58 6-ft. 1.9 |
| | CONDENSER MI |
| 10 SALL No | It's a little giant in |
| | quality. Metal encas |
| POLY PAKS #9K1795 JUMBO TAPED MICRO SINGLE PIN RED MICRO SINGLE PIN RED MICRO YELLOW | 7/16" x lapel clip, 600 ob |
| C | 7/8" long nedance L.5VDC. 4 |
| FZ LTNINFIELD, MA. | 7/16" x lize for the giant in quality. Meter denaming directional, fred. rei 12,000 ffs. Leas tie 12,000 ffs. Leas tie 12,000 ffs. Leas tie 2 for \$4.96 |
| CATALOG ZIP 01940 #9K2790 JUMBO RED CLEAR | |

| Order By Cat. No. 9K198 | | | | | | | | |
|--|--|--|--|--|--|--|---|---|
| & Type No | | 2 Fo | | Each | 2 for | Type No. | Each | 2 for |
| □ SN7400 □ SN7401 | \$.19 | \$.20 | | .19 | .20 | D SN74153 | 1.29 | 1.30 |
| D SN7403 | .25 | .20 | B 0 SN7471 | .19 | .36 | □ SN74154 □ SN74155 | 1.75 | 1.76 |
| □ SN7404 □ SN7405 | .19 | .20 | | .19 | .20 .60 | D SN74156 | .39 | 1.00 |
| □ SN7406 | .19 | .20 | D SN7475 | .69 | .70 | O SN74158 | .99 | 1.00 |
| □ SN7409 | .39 | .40 | D SN7480 | .19 | .20 | O SN74161 | 1.25 | 1.26 |
| SN7410 | .25 | .26 | SN7483 | .99 | 1.00 | D SN74164 | .79 | .80 |
| □ SN7417 | .35 | .36 | D SN7488 | .79 | .80 | □ SN74165 □ SN74166 | 1.99 | 2.00 |
| □ SN7420 □ SN7421 | .32 | .33 | | 3.49 | 3.50 1.00 | O SN74173 | 1.79 | 1.00 |
| □ SN7423 □ SN7426 | .29 | .30 | □ SN7491 | 1.29 | 1.30 | D SN74175 | .99 | 1.00 |
| □ SN7430 | .29 | .30 | □ SN7493 | .79 | .80 | D SN74177 | .79 1.99 | 2.00 |
| D SN7437 | .19 | .20 | | .79 | .80 | □ SN74180 □ SN74182 | .49 | .50 |
| D SN7440 | .19 | .20 | D SN7496 | .29 | .30 | □ SN74190 | 1.99 | 2.00 |
| D SN7444 | .19 | .60 | D SN74107 | .79 | .80 | D \$N74191 | 1.75 | 1.76 |
| □ SN7446 □ SN7450 | 1.25 | 1.26 | | | .40 | □ SN74193 □ SN74194 | .99 1.25 | 1.00 |
| □ SN7451 □ SN7453 | .19 | .20 | D SN74121 | .59 | .60 | □ SN74197 | .75 | .76 |
| □ SN7454 | .19 | .30 | D SN74126 | | 1.00 | SN74199 | 1.50 3.50 | 1.51 3.51 |
| □ SN7455 | | | | | | | | |
| □ SN7460 | .19 | .20 | | 49 | .50 | D SN74251 | .79 | .80 |
| Case c | .35 .35 .19 OP-Al ode: T=T Each \$.79 | 36 .36 .20 MPS TO-220 2 for 5 .80 | SAT 44C Power Tab: Type No. LM340T-5 | ENT- | .50 .50 .70 | SN74251 SN74284 SN74298 E'' PR TO-3: H=TO- Type UM703N | .79 5.99 3.78 ICES -5; N=DI Each .59 | .80 6.00 3.76 |
| Case c pe No | 35 35 35 36 36 37 37 37 37 37 37 37 37 37 37 37 37 37 | 388 388 389 390 390 390 390 390 390 390 390 390 39 | S AT 44C D Power Tab: Yye No. LM3407-5 LM3407-5 LM3407-6 LM3407-1 LM350N LM550N LM550N LM555N LM55SN L | ENT- V=Mini d 1.49 1.49 1.49 2.149 2.149 1.49 2.149 2.15 1.39 1.49 2.15 1.39 1.49 1.49 1.49 1.49 1.49 1.49 1.49 1.4 | So So So So So So So So | E'' PR 10-3: H=TO Type LM704h LM70 | 79 5.99 1.75 ICES 1.75 Each 1.99 1.99 2.55 3.30 2.49 2.79 2.49 2.49 2.49 2.49 2.49 2.49 2.49 2.4 | 2 fo .6.6.2 2.2 2.3 3 .6.6 1.55 2.2 4.4 .8.8 .6.6 .5.5 1.2 2.7 7.7 |
| Case c Pe No | 35 35 35 36 36 37 37 37 37 37 37 37 37 37 37 37 37 37 | 388 388 388 388 388 388 388 388 388 388 | S AT 44C Power Tab: Type No. LM3407-5 LM3407-5 LM3407-6 LM3407-1 LM3407-1 LM3407-1 LM3407-1 LM3407-1 LM350N LM350N LM350N LM350N LM351N LM351N LM351N LM352N LM352N LM5580 LM5580 LM5580 LM5580 | LENT- V=Mini d Each 1.49 1.49 1.49 1.49 2.25 2.25 2.25 2.55 5.75 1.79 3.9 | 50 50 50 50 70 2 for 1.50 1.50 1.50 1.50 2.26 2.60 2.26 2.60 2.76 1.50 2.76 1.50 2.76 1.50 2.76 2.76 2.76 2.76 2.76 2.76 2.76 2.76 | E'' PR 10-3: H=TO Type LM704h LM709h LM704h LM709h LM704h LM709h LM70 | 79 5.99 3.75 ICES 5.9 19 1.19 2.25 3.0 3.0 3.0 1.79 2.49 1.79 2.49 1.79 2.49 1.79 2.49 1.79 2.69 3.9 3.9 3.9 3.9 4.9 4.9 4.9 4.9 4.9 4.9 4.9 4.9 4.9 4 | .80 6.00 3.76 2 for 6.62 2.2.2.5.5 8.82 2.2.5.5 1.8.8.2.5 1.8.8.8.8.8.8.8.8.8.8.8.8.8.8.8.8.8.8.8 |
| D \$N7442 \$N7444 P(Case cope No. M300H M300H M300H M301V M301V M301H M307V M311H M307V M311H M318V M311H M318V M311H M318V M311H M318V M310H M31H M310H M3 | 35 .35 .35 .35 .35 .35 .35 .35 .35 .35 . | 388 388 388 389 390 390 390 390 390 390 390 390 390 39 | S AT 440 Power Tab: Tye No. D Power Tab: Tye No. D M3407-5 D M3407-5 D M3407-6 D M3407-6 D M3407-1 D M350N | *** ENT- V=Mini d Each 1.49 1.49 1.49 1.49 2.149 2.139 1.49 2.5 2.5 5.75 1.79 3.99 1.00 1.00 | 50 50 50 70 2 for 1.50 1.50 1.50 1.50 2.26 2.60 2.26 2.60 2.60 5.96 2.60 5.90 1.50 1.50 1.50 1.50 1.50 1.50 1.50 1.5 | E'' PR | 79 5.99 3.75 Each Each 199 .199 .290 .390 .390 .791 .792 .249 .193 .194 .795 .194 .795 .195 .196 .197 .795 .196 .197 .197 .198 .199 .199 .199 .199 .199 .199 .199 | .80 6.00 3.76 2 for .66 .62 .22 .25.5 .88 .82 .25.5 .1.88 .25.5 .1.88 .25.5 .1.88 .25.5 .1.88 .25.5 .1.88 .25.5 .2 |
| D \$17442 \$17444 PC Case of Po No. M300H M300H M301V M301V M300H M301V M308H M311V M309H M311V M309H M311V M309H M310V M300H M310V M300H | 35 35 35 35 35 35 35 35 35 35 35 35 35 3 | 388 388 380 380 380 50 466 466 466 466 300 1.500 1.500 1.000 1.200 1.200 1.500 | S AT 440 Power Tab: Type No. D M3407-5 L M3407-5 L M3407-1 L M350N L M377N L M350N L M552N L M552N L M5540H L M552N L M558N L M568N L | LENT- V=Mini d Each 1.49 1.49 1.49 1.49 2.149 2.149 2.149 2.149 2.149 2.15 1.39 2.15 1.39 2.15 1.39 2.15 1.49 2.16 2.16 2.16 2.16 2.16 2.16 2.16 2.16 | 2 for 1.500 | E'' PR | 79 5.99 3.75 ICES 5.5; N=DI 5.59 1.99 1.99 1.99 1.79 2.49 1.79 2.49 1.79 1.20 6.69 1.20 6.69 | .80 6.00 3.76 2 2 for .66 2.2 2.5.5 8.8 2.2 2.5.5 1.8.8 2.5.5 1.8.6 6.5 5.5 1.2.7 7.7 7.7 8.8 8.8 |
| Depth 1 | 35 .35 .35 .35 .35 .35 .35 .35 .35 .35 . | 386 386 386 380 380 210 2 for 5.80 466 466 300 1.50 1.50 1.00 1.00 1.20 1.20 1.50 1.50 1.50 1.50 1.50 1.50 | S AT 44C Power Tab: Type No. LM3407-5 LM3407-5 LM3407-5 LM3407-1 LM351N LM355N | LENT- V=Mini d Each 1.49 1.49 1.49 1.49 2.25 2.25 1.39 1.49 1.49 2.25 1.39 1.49 1.49 2.25 2.25 2.25 2.25 2.25 2.25 2.25 2.2 | 2 for 1.50 1.50 1.50 1.50 1.50 1.50 1.50 1.50 | E'' PR | 79 5.99 1.75 ICES 5.9 1.99 1.99 1.99 1.99 1.99 1.99 1.99 | .80 6.00 3.76 2 fe 22 2.5 fe 22 2.5 fe 32 2.3 |
| De Sh7442 Proposition of the state of the s | 35 .35 .35 .35 .35 .35 .35 .35 .35 .35 . | 383 383 383 380 380 380 380 380 380 380 | S AT 44C Power Tab: Type No. LM3407-5 LM3407-5 LM3407-5 LM3407-1 LM350N LM351N LM355N LM35SN LM355N LM35N LM35 | ENT- V=Min of Each 1.49 1.49 1.49 1.49 1.49 2.25 1.39 1.49 1.49 2.25 1.39 1.49 2.25 2.25 2.35 2.35 2.35 2.35 2.35 2.35 | 50 50 50 50 50 50 150 1.50 1.50 1.50 1.50 2.26 2.00 1.50 2.00 1.50 1.00 1 | E'' PR 10-3: H=TO Type LM703M LM704M LM70 | 79 5.99 3.75 ICES 8-101 5.99 1.19 1.25 1.25 1.29 1.49 1.79 1.49 1.25 1.25 1.25 1.25 1.25 1.25 1.25 1.25 | .80 6.00 3.76 2 fe 22 2.55.88 2.55.88 1.55.1.88 2.55.2.1.2.7.7.7.7.7.7.7.7.7.7.7.7.7.7.7.7.7 |
| D \$N7464 P(Case Cope No. M300H M300 | 35 .35 .35 .35 .35 .35 .35 .35 .35 .35 . | 383 383 383 380 380 380 380 380 380 380 | S AT 440 Power Tab: Type No. LM3407-5 LM3407-5 LM3407-6 LM3407-1 LM3407-1 LM3407-1 LM3407-1 LM3407-1 LM350N LM350N LM350N LM350N LM351H LM552N LM552N LM552N LM552N LM558H LM55H LM558H LM55H LM5 | LENT- V=Mini d Each 1.49 1.49 1.49 1.49 2.25 2.25 2.25 2.25 1.79 1.00 1.00 1.00 1.00 1.00 1.00 1.00 1.0 | 50 .50 .50 .50 .70 lip: K=7 1.50 1. | E'' PR 10-3: H=TO Type LM703N LM704H LM70 | 10 ES 10 ES 10 ES 10 19 19 19 19 19 19 19 19 19 19 19 19 19 | . 600 3.76 2 to 6.2 2.2 2.5.5 3.3 3.6.6.5 1.5.1 2.5.5 2.2 2.7 7.7 7.7 7.7 7.7 7.7 7.7 7.7 7.7 |
| Depth 1 | 35 .35 .35 .35 .35 .35 .35 .35 .35 .35 . | 336 320 320 320 320 320 320 320 320 320 320 | S AT 44C Power Tab: Type No. LM3407-5 LM3407-5 LM3407-6 LM3407-1 LM3550 LM3560 LM3560 LM3560 LM3560 LM3560 LM5580 | LENT- V=Mini d Each 1.49 1.49 1.49 1.49 2.149 2.149 2.25 1.39 2.25 1.39 2.25 1.39 2.25 1.39 2.25 1.39 2.25 1.39 2.25 1.39 2.25 1.39 1.49 2.25 1.39 1.49 2.25 1.39 1.49 2.25 1.39 1.49 2.25 1.39 1.49 1.49 2.25 1.39 1.49 2.25 1.39 1.49 1.49 2.25 1.39 1.49 1.49 2.25 1.39 1.49 1.49 2.25 1.39 1.49 1.49 2.25 1.39 1.49 1.49 2.25 1.39 1.49 1.49 2.25 1.39 1.49 1.49 2.25 1.39 1.49 1.49 1.49 1.49 1.49 1.49 1.49 1.4 | 50 50 50 50 50 50 150 1.50 1.50 1.50 1.50 2.26 2.00 1.50 2.00 1.50 1.00 1 | E'' PR 1-31-14-24 5 8774294 5 8774294 5 8774294 5 8774294 1 870-3: H=TO 1 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 | 79 5.99 3.75 ICES 8-101 5.99 1.19 1.25 1.25 1.29 1.49 1.79 1.49 1.25 1.25 1.25 1.25 1.25 1.25 1.25 1.25 | .80 6.00 3.76 2 fe 22 2.55.88 2.55.88 1.55.1.88 2.55.2.1.2.7.7.7.7.7.7.7.7.7.7.7.7.7.7.7.7.7 |

| nt. No. 0K2377 0K2378 0K2379 0K2380 0K2381 | Type 1N4001 1N4002 1N4003 1N4004 1N4005 | Volts 50 100 200 400 600 | \$a 10 for \$ 10 for 10 for 10 for | .75 .85 .95 1.19 | 1¢ SA 20 for \$ 20 for 20 for 20 for | .76 .86 | Type No. 1.5 Ampl | V □ 50 □ 100 | CTI | FIER | tago FALE \$1.96 |
|---|--|---|--|---|--|------------|--|--|--------|----------------------------|------------------------|
| K2383 | 1N4006 1N4007 | 1000 | 10 for 10 for | 1.49 | 20 for | | | | 1.69 2 | for | 1.50 1.70 2.00 |
| ILLET or by Cat. .5 AMP | No. 9K60 | B84 and v | ers! | CI | ERM EN | ET ' | | \$1.51 | 2.50 2 | | 2.26 2.51 titurn |
| 00V 00V | 10 for 10 for 10 for | .69 20 .79 20 .89 20 | for .70 for .80 for .90 | 0 10(m) 0 20(m) 0 50(m) | D 200 | (m) | 1K(m) 2K(m) 0 | 2.5K(s) 5K(s) 10K(s) 36 and v | | (m) n 50 | POK(m) Mog(m) |
| 4-ft. 3-ft. | ctors | 1¢ Sale | 1 | - POWER 730 - SCR 48 - TRIA 0 - QUADI Sale \$.55 .69 | 'S CS | L | V Style 15 P.C. 25 P.C. 25 P.C. | KI S9 and v | niue | capaci 1¢ SAL 20 for | tors E |

| 3-n. 1.98 6-ft 1.99 0 2 | 00 1.10 1. | 11 0 50 25 61 0 100 25 | | 1.00 12 for 1.00 10 for | |
|---|---|---|-----------------------------------|---|--------------------------------------|
| CONDENSER MIKE "TIE-PIN" TYPE It's a little glast in sound sullify MFT circuit, omit- directional, Feet, resp. 20 7/16" x hard citic, doo chan im- redame 1.290c. 4.95 2 for \$4.96 | 1 Watt Sale 7.5V 5 for \$1 8.2V 5 for 1 | 1¢ SALE . 10 for \$1.01 . 10 for 1.01 . 10 for 1.01 . 10 for 1.01 | 5 WATTS 6. V 8.2V 15. V 18. V | y Cat. No. 9K5 Sale 10 3 for 1. 6 for | SALE 1.01 1.01 1.01 1.01 |


satisfaction starts here

MEET THE ECONORAM™ FAMILY . . .

These **static** memory kits deliver outstanding performance at prices even the dynamics can't match. What others consider "extras" we consider necessities, such as buffering on all lines, reliable DMA, sockets, goldplated card fingers... and all the other signs of quality that make up an Econoram.

More good news: Our memory kits (except Econoram II™) are now "Unkits". All sockets and bypass caps are pre-soldered into place, turning an otherwise tedious assembly job into a pleasurable, one evening project.

We want to be your memory supplier: and that means offering a superior product at the lowest possible price.

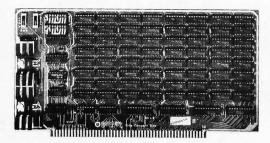

8K ECONORAM II™

Just try to find a more cost-effective S-100 package! Better yet, get 3 kits (24K of memory) for only \$375. Add \$20 per board for assembled/tested. \$135

16K ECONORAM IV™

Ideal for S-100 buss system builders who need a big chunk of memory that draws less than 2000 mA. Manual write protect for 4K blocks; use with or without phantom line. Add \$35 for assembled/tested. \$279

24K ECONORAM VII™

A dense and flexible S-100 board that draws less than 2000 mA. Configured as two 8K and two 4K blocks with independent addressing and protection. Use with or without phantom lines. Add \$40 for assembled/tested.

MORE ITEMS..

TRS-80 16K CONVERSION KIT

Why settle for the limitations of a TRS-80 4K system? Expand it to 16K with our conversion kit. Includes eight uPD416 1×16 K dynamic memories and instructions for converting your machine to 16K. You could pay up to \$290 elsewhere . . . but our kit is only \$190.00

CPU POWER SUPPLY

Here is an economical, conservatively rated power supply for small computer systems or digital/analog bench work. Delivers +5V @ 4A with crowbar over-voltage protection; also gives $\pm 12 @ \frac{1}{2}A$ per side. Adjustable negative bias supply, 5-10V @ 10 mA. All in all, if you need a small power supply you can't beat the performance or the price.

11 SLOT MOTHER BOARD "UNKIT" \$90

Those who recognize value have made the 10/11 slot Motherboard one of our most popular nonmemory kits. Now, we've made it even more desirable by pre-soldering all 11 edge connectors in place to take the tedium out of assembly. Includes our much-copied active termination circuitry that takes the noise, glitches, ringing, and overshoot problems off your buss for optimum data transfer . . . as well as all edge connectors and plenty of bypass capacitors.

18 SLOT MOTHER BOARD KIT \$124

Same features as our 11 slot version; includes 18 edge connectors and active termination circuitry.

COMING SOON: A NEW FAMILY OF ECONOROMSTM

Don't load and reload often used programs or routines; store them in one of our ROM boards. We're putting final touches on 2 boards; one is 16K, configured as 4 independent 4K blocks with optional power on start, and uses 2708s. Our other board combines both ROM and RAM and uses 2716s. Watch this space for further developments.



TERMS: Please allow up to 5% for shipping; excess refunded. Add \$1 handling for orders under \$10. Cal res add tax. COD OK with street address for UPS. For VISA® /Mastercharge® orders (\$15 min) call our 24 hr. order desk at (415) 562-0636. Prices good through cover month of magazine.

PROBE 1¢

PROBE 1¢ with the purchase of SCOPE

and the MENTION this MAGAZINE





M3A 3 dig 1% DC \$ 134.00 \$ 158.50 LM3.5A 3½ dig .5% DC ... \$ 158.50 LM40A 4 dig .1% DC ... \$ 209.00 M4A 4 dig .03% DC \$ 250.00

Rechargeable batteries and charger in-

Measures DC Volts, AC Volts, Ohms and Current

Automatic polarity, decimal and overload indication VLS MS-215 DUAL TRACE MINISCOPE \$435.

Rechargeable batteries and charge Measures DC Volts, AC Volts, Ohms and

Automatic polarity, decimal and overload No zero adjustment and no full-scale ohms

Battery-operated — NiCad batteries; also AC

line operation. Large LED display for easy reading without interpolation Size: 1.9"H x 2.7"W x 4"D

Purchase any of the LM series Meters and buy the LEATHER CASE for 1¢

8803

\$318.

MS-15 MINISCOPE

15 megahertz bandwidth

External and internal trigger.

Time base — .1 microsec. to 0.5 Sec/div Time base — . settings . ± 3%

settings. ± 3%.

Battery or line operation.

Automatic & line sync modes.

Power consumption < 15 watts.

Vortical Gain — .01 to 50 Vidiv - 12 settings:

Viewing are 1.1" x 1.35".

Case size 2.7"H x 6.4"W x 7.5"D, 3 pounds.

Paris & Labor quaraneed 1 year.

MS-215 Dual Trace Version of MS-15 \$435.


SALE S-100 BUS EDGE CONNECTORS

R681-3 SQ:100 Cont 125 ctrs MERCED SOLDER EYELET tails GOLD 97.35

1-4 5-9 10-24 14 00 1375 1350

Other Popular Edge Connectors R644-3 22/44 Cont 156 ctrs WRAP tails GOLD 84.71 22/44 Cont 156 ctrs SOLDER EYELES tails 5-9 10-24 42.75 42.50

3 LEVEL WRAP
GOLD WIRE WRAP



| | 1-24 | 25-49 | 50-99 | 100-249 | 250-999 | 1K-5K | |
|---------|------|-------|-------|---------|---------|-------|--|
| 8 pin* | .41 | .38 | .35 | .31 | .27 | .23 | |
| 14 pin* | .39 | .38 | .36 | .32 | .29 | .27 | |
| 16 pin* | .43 | .42 | .39 | .35 | .32 | .30 | |
| 18 pin | .63 | .58 | .54 | .47 | .42 | .36 | |
| 20 pin | .80 | .75 | .70 | .63 | .58 | .53 | |
| 22 pin* | .90 | .85 | .80 | .70 | .61 | .57 | |
| 24 pin | .90 | .84 | .78 | .68 | .63 | .58 | |
| 28 pin | 1.10 | 1.00 | .90 | .84 | .76 | .71 | |
| 40 pin | 1.50 | 1.40 | 1.30 | 1.20 | 1.04 | .89 | |
| | | | | | | | |

Sockets purchased in multiples of 50 per type may be combined for best price.

All sockets are GOLD 3 level closed entry *End and side stacable. 2 level, Solder Tail, Low Profile, Tin Sockets and Dip Plugs available. CALL FOR QUOTATION

Ket includes 12
Intralation reapertions for +5, +12
Interest of the second interest of th

Circuits Mounts 11 receptacles with 100 contacts (2 rows) on 125 centers with 250 row spacing. Vector part muther 868-12, or mounts 10 receptacles by law interconnections to smaller mother board for expansion.

Includes etched circuits and instructions for option of active, pulling, or planting terminations. ± 120 or 164 (7 AMPS). Current ranges are per Min. 570-275 with 1900.

\$29.50

Vector

8800V Microcomputer/processo Universal

plugboard, use with S-100 bus Com-plete with heat sink & hardware, 5.3" x 10" x 1/16" 8801-1

Same as 8800V except plain; less power buses & heat sink 10-24

Plugboards

3682 9.6" x 4.5" \$10.97 3682-2 6.5" x 4.5" \$9.81

Hi-Density Dual-In-Line Plugboard for Wire Wrap with Power & Grd. Bus Epoxy Glass 1/16" 44 pin con. spaced .156



\$10.90 3677-2 6.5" x 4.5" \$9.74

Gen. Purpose D.I.P. Boards with Bus Pattern for Solder or Wire Wrap. Epoxy Glass 1/16" 44 pin con. spaced .156



3662 \$7.65 3662-2 9.6" x \$11.45 pattern plugboards for

IC's Epoxy Glass 1/16' 44 pin con. spaced .156



Card Extender has 100 contacts-50 per side on .125 centers-Attached connector-is compatible with S-100 Bus Systems.......\$25.00 3690 6.5" 22/44 pin .158 ctrs. Extenders\$12.00

1/16 Vector BOARD .042 dia holes on 0.1 spacing for IC's PRICE 1 - 9 10 - 19 \$1.49 1.34 Phenolic SIZE PART NO 64P44XXXP 4.5x6.5 \$3.51 3.16 169P44XXXP 4.5x17

Epoxy Glass 64P44 4.5x6.5 \$1.70 1.53 1.89 3.87 6.89 84P44 4.5x8.5' \$2.10 \$7.65 169P84 8.5x17







\$24.50

P160-4T includes \$75.00

2708 8K 450 ns

EPROM **FACTORY PRIME** \$10.00 EA. 25 Call For

Price



\$30.00 16-G3 100 for \$30.00

50 of each for \$32.00


Sockets are End & Side stackable, closed entry

LIQUID CRYSTAL DIGITAL **CLOCK-CALENDAR**

For Auto, Home, Office Small in size (2x2 ½x ½)
Push button for seconds release for date.
Clocks mount anywhere with either 3M doub sided tape or VELCRO, included.
2 MODELS AVAILABLE:
LCD-101, portable model runs on self-contain balteries for better than a year.
LCD 102, rung, on 12 You'll system and is bec

lighted. LCD-101 or LCD-102 your choice. \$34.95

\$2.00





TOP List \$12. \$4495

\$4495

SPECIAL



\$1750

MA1003

14CS2 100 for 1400

5 (03582

MICRO-KLIP T42-1 pkg. 100 \$ 1.50 T42-1 pkg. 100 \$ 1.50 T42-1 pkg. 1000 \$11.00



.8" LED ALARM CLOCK

12 hr. LED Alarm Clock uses 3½-digit :8" LED Display with AM/PM indicators and colons. Direct drive, PIN to PIN interface with **31998A** I.C. Just add switches, AC Supply, Alarm. Display and I.C. only.

\$7.95 or 2/\$15.00



Price Breakthrough!

12:48

CAR CLOCK Bright Green Fluorescent Display Crys-Time Base Assembled, just add switches and 12 VDC.

16CS2 100 for \$1600 14 pin CS2 10 for *2°°
16 pin CS2 8 for *2°°

These low cost DIP sockets will accept both standard width plugs and chips. For use with chips, the sockets offer a low profile height of only .125" above the board. These sockets are end stackable.

SPECIAL

Vector WRAP POST for .042 dia. holes (all boards on this page) T-44 pkg. 100 . \$ 2.28 \$14.00

P-149 hand install



ONE **ELECTRONICS** © 4911K West Rosecrans, Hawthorne, CA 90250

VISA, MC, BAC, check, Money Order, C.O.D., U.S. Funds Only. CA residents add 6% sales tax. Minimum order \$10.00. Orders less than \$75.00 include 10% shipping and handling; excess refunded. Just in case . . . please include your phone no. "Sorry, no over the counter sales" Good thru Sep. 1978

phone orders welcome (213) 973-4876



FREE PROBES FREE PROBES FREE PROBES



This new instrument has taken a giant step in front of the multitude of counters now available. The Opto-8000.1 boasts a combination of features and specifications not found in units costing several times its price. Accuracy of ± 0.1 PPM or better — Guaranteed — with a factory-adjusted, sealed TCXO (Temperature Compensated Xtal Oscillator). Even kits require no adjustment for guaranteed accuracy! Built-in, selectable-step attenuator, rugged and attractive, black anodized aluminum case (.090" thick aluminum) with tilt bail. 50 Ohm and 1 Megohm inputs, both with amplifier circuits for super sensitivity and both diode/overload protected. Front panel includes "Lead Zero Blanking Control" and a gate period indicator LED. AC and DC power cords with plugs included.



03

OPTOELECTRONICS. INC

5821 NE 14 Avenue Ft. Lauderdale, FL 33334 Phones: (305) 771-2050 771-2051 Phone orders accepted 6 days, until 7 p.m.

BANKAMERICARD

SPECIFICATIONS:

Time Base—TCXO ±0.1 PPM GUARANTEED! Frequency Range—10 Hz to 600 MHz Resolution-1 Hz to 60 MHz; 10 Hz to 600 MHz Decimal Point-Automatic All IC's socketed (kits and factory-wired) Display-8 digit LED Gate Times-1 second and 1/10 second Selectable Input Attenuation—X1, X10, X100 Input Connectors Type -BNC Approximate Size-3"h x 71/2"w x 61/2"d Approximate Weight-21/2 pounds Cabinet—black anodized aluminum (.090" thickness) Input Power-9-15 VDC, 115 VAC 50/60 Hz or internal batteries OPTO-8000.1 Factory Wired OPTO-8000.1K Kit

ACCESSORIES:

Battery-Pack Option-Internal Ni-Cad Batteries and charging unit \$19.95

P-100—DC Probe, may also be used with scope \$13.95 P-101-LO-Pass Probe, very useful at audio frequencies \$16.95

> P-102—High Impedence Probe, ideal general purpose \$16.95 usage

\$299.95

\$249.95

VHF RF Pick-Up Antenna-Rubber Duck w/BNC #Duck-4H \$12.50 Right Angle BNC adapter #RA-BNC \$ 2.95

FC-50 — Opto-8000 Conversion Kits:

Owners of FC-50 counters with #PSL-650 Prescaler can use this kit to convert their units to the Opto-8000 style case, including most of the features.

FC-50 - Opto-8000 Kit \$59.95 Factory Update \$99.95 *FC-50 — Opto-8000F FC-50 — Opto-8000.1 (w/TCXO) Kit \$109.95 *FC-50 - Opto-8000.1F Factory Update \$149.95 *Units returned for factory update must be completely as-

sembled and operational

TERMS: Orders to U.S. and Canada, add 5% to maximum of \$10.00 per order for shipping, handling and insurance. To all other countries, add 10% of total order. Florida residents add 4% state tax. C.O.D. fee: \$1.00. Personal checks must clear before merchandise is shipped.


TEKTRONIX 535A with DUAL TRACE PLUG IN (CA).


We have acquired a limited number of TEKTRONIX 535A OSCILLOSCOPES, with the CA (dual trace) plug ins. These scopes have a present market value of about \$800.00. For years this scope has been one of ten workhorses of the industry, and it is rare that an individual can find one at an affordable price. Due to limited number available, we suggest telephoning your order in.

All scopes are shipped freight collect.

STOCK NO. XX3K

TEKTRONIX 535A Oscilloscope and CA (dual trace) Plug in, \$495.00

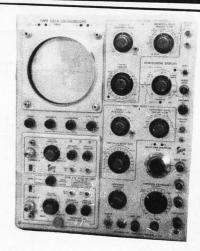

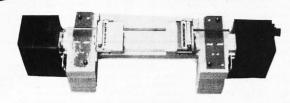

FORM FEED MECHANISM

Again DELTA brings you the unusual. This FORM FEED MECHANISM is designed to be used with any printer, is completely adjustable in width and speed, which is controlled by your printer. It was made in West Germany, and was made to sell for \$450.00.

We will sell the limited quantity we have for \$99.00. This is a device that you may never again see advertised.

STOCK NO. XXX4K

FORM FEED MECHANISM

saa nr

TV HOCKEY and SOCCER GAME



For some time we have been selling our VIDEO-CUBE, the TV interface between computers, cameras, etc., and your TV set. We sold them in kit form, and to date we have sold over 3,000. We sold the complete VIDEOCUBE, when available, for \$16.95.

We now have a limited number of Hockey-Soccer Video games, complete with VIDEOCUBE interface, at a new price of \$18.95; previously sold for \$27.50 in kit form. This gives you two games, at two levels of skill, with LED readouts for scorekeeping. This game sold in Boston department stores for \$79.50.

STOCK NO. 5495K

Complete VIDEO GAME & VIDEOCUBE

\$18.95 ea.

2/\$35.00

NEW TRANSFORMERS

TRANSFORMER 1. Primary 115V, Secondary 1, 30 V @ 2 A. Secondary 2, 16.5 V @ 1.2 A. Secondary 3, 16 V @ 3.5 A. Secondary 4,9.5 V @ 3.5 A.

STOCK NO. 6677R

Wt 10 lbs

\$10.95 ea.

2/20 00

TRANSFORMER 2. Primary, 115 V. Secondary 1, 12 V. @ 5 A., Secondary 2, 24 V. @ 9 A., Secondary 3 14 V. @ 20 A. Secondary 4, 125 V. @ 1.5 A.

STOCK NO. 6675K

Wt. 16 lbs

\$18.95 ea.

2/36.00

TRANSFORMER 3. Primary 115 V. Secondary 1, 12.6 V ct @ 1 A. Secondary 2, 33 V tapped at 13.1 V @ 1 Amp. Secondary 3, 140 V. @ 100 ma.

STOCK NO. 6772K

2 lbs.

4 1/16" x 2 1/16" x 2 5/8"

\$2.95 ea.

2/5 00

Please include sufficient postage, unless otherwise noted. Excess will be refunded. Send for our NEW CATALOG 19, 120 pages of computer and electronic bargains.

MAIL ORDER

DELTA ELECTRONICS

P.O. Box 2, 7 Oakland St. Amesbury, Mass. 01913

Over the counter salesroom

ATLANTA GA
DELTA ELECTRONIC HOBBIES
5151 Buford Hwy.
Doraville, Atlanta, Ga.

DELTA ELECTRONIC
WAREHOUSE OUTLET
590 Commonweath Ave,
Boston, Mass, is no longer
affiliated with DELTA
ELECTRONICS
D13



S.D. COMPUTER PRODUCTS AN EMPIRE IND. CO.

EXPANDABLE EPROM BOARD

16K OR 32K EPROM \$49.95 W/OUT EPROM Allows You to Use Either 2708's For 16K of Eprom or 2716's For 32K of Eprom

KIT FFATURES

- 1. All Address Lines & Data Buffered
- Quality Plated through P.C. Board Including Solder Mask and Silk Screen
 Selectable Unit States
 On Board Regulation Provided
- 5. All Sockets Provided W/Board
- WE CAN SUPPLY 450As 2708's AT \$11.95 WHEN PURCHASED WITH BOARD.

4K LOW POWER RAM KIT The Whole Works - \$79.95

Full Buffered - on board regulated - reduced power consumption utilizing low power 21L02-1 500ns RAMS - Sockets provided for all IC's. 500ns RAMS - Sockets provided for all IC's. Quality plated through PC board.



*Add \$10.00 fo 250ns RAM opera

EXPANDORAM THE ULTIMATE RAM BOARD 32K FOR \$475.00





64K MODEL \$281.00 519.00 757.00 995.00

THE 32K VERSION USES THE MOS. BUY A SIDO COMPATIBLE RAM THE 64K VERSION USES THE MOS. TEK MKALLS RAM AND HAS 8K BOARD AND UPGRADE THE SAME TEK MKALLS RAM AND HAS 8K BOARD AND PORTICION & BOARD TO A MAXIMUM OF 65K BOUNDARIES AND PROTECTION & UTILIZES DIP SWITCHES P. C. MEMORY IN STEPS OF EITHER 8K UTILIZES DIP SWITCHES. P. C. MEMORY IN STEPS OF EITHER 8K UTILIZES DIP SWITCHES. P. C. BOARD COMES WITH SOCKETS FOR 12 FOR AT YOUR OPTION BY MEET BOARD COMES WITH SOCKETS FOR 32K OPERATION FROM SO COMPUTER PRODUCTS.

LOOK AT THE FEATURES WE HAVE BUILT INTO THE EXPANDORAM!

- MEMORY ACCESS TIME IS 375 ns MEMORY CYCLE TIME IS 500 ns POWER REQUIREMENTS ARE:
- 8 VDC 400 MA DC
 18 VDC 400 MA DC
 —18 VDC 30 MA DC
 ON BOARD INVISIBLE REFRESH

- NO WAIT STATES REQUIRED
 NO CYCLE STEALING NEEDED
 ON BOARD REGULATION
- . CONTROL. DATA & ADDRESS INPUTS UTILIZE LOW POWER SCHOTTKY
- DEVICES

 DESIGNED TO WORK WITH Z-80,

8080, 8085, CPU's
ADD \$50.00 TO ABOVE PRICES FOR FULLY ASSEMBLED AND TESTED BOARDS

Low Cost Cassette Interface Kit

\$19.95



Features: Play and record K.C. Standard 2400/1200 Hz tapes, 300 Baud, TTL 1/0 Compatible, Phase Lock Loop, Both 22 Pin Connector and 8 Pin Molex Connector. Comes partially assembled. Oscillator and phase lock top pre-tuned to K.C. Standard, Selector switch sends cassette data or auxiliary input data to microprocessor. LED indicates logic 1 level.

8K LOW POWER RAM \$159.95

FULLY ASSEMBLED AND TESTED. NOT A KIT.
Imsai — Altair — 5-100 Buss compatible, uses low power
static 21.02-500ns fully buffered on board regulated,
quality plated through PC board, including solder mask. 8
pos. dip switches for address select.

*Add \$30.00 for 250ns RAM operation



Z-80 CPU BOARD KIT Complete Kit \$139.

CHECK THE ADVANCED FEATURES OF OUR Z-80 CPU BOARD: Expanded set of 158 instructions, 8080A software capability,



operation from a single 5VDC power supply; always stops on an M1 state, true sync generated on card (a real plus feature!), dynamic refresh and NMI available, either 2MHZ or 4MHZ op-

eration, quality double sided plated through PC board; parts plus sockets provided for all IC's. *Add \$10. extra for Z-80A chip which allows 4MHZ operation.

NEW FROM S.D. "VERSAFLOPPY" KIT

THE VERSATILE FLOPPY DISK CONTROLLER ONLY \$149.00

FEATURES: IBM 3740 Soft Sectored Compatible. S-100 BUS Compatible for Z-80 or 8080. Controls up to 4 Drives (single or double sided), Directly controls the following drives:

1. Shugart SA400/450 Mini Floppy.

2. PERSCI 70 and 829 71.

4. MET 7000/750.

5. CDC 9404/9406.

34 Pin Connector for Mini Floppy, 50 Pin Connector for Standard Floppy. Operates with modified CP/M operating system and C-Basic Compiler. The new "Versafloppy" from S.D. Computer Products provides complete control for many of the available Floppy Disk Drives, Both Mini and Full Size. FDI7718-1 Single Density Controller Chip, Listings for Control Software are included in price.

FD 17718-1 CHIP ALONE \$39.95

Z80 STARTER KIT

LEARN COMPUTERS FROM THE START! SIMPLE, STEP BY STEP LEARNING, CONSTRUCTION, PROGRAMMING, OPERATION, MEMORIES, INTERFACING, COMPUTING, AND CONTROLLING WITH AUDIO CASSETTE INTERFACE CAPABILITIES.

Complete Kit includes: Key board and Display; Z80 Central Processing Unit; Instructions; Operation Man-ual; Learning Guides.

Jacksung Unit; Instructions; Operation Manual; Learning Guides.
Features: Powerful Z80 CPU with 158 instructions • 1024
Bytes (Expandable to 2048 Bytes ON BOARD) of RAM • 2 Bi-Directional Input/Output Ports with Handshaking
• Kansas City Standard Audio Cassette Interface for Program Storage • Hexadecimal Keyboard and Display
• Wirewrap area for custom circuitry • \$-100 Connector on board for Memory and I/O Expansion • 2716/2758
PROM Programmer • "Z-BUG" Monitor ROM (Including: Memory, Port and Register Examine and Change Commands; Breakpoints; Single Step Capability; Audio Tape Load and Dump; Execute user program Commands.)
Many more unique features, The best computer educational kit on the market . . . the complete computer and educational package for only \$199.00. (Available June 1978).

INTRODUCING THE SBC-100

(The Z-80 Based, S-100 Single Board Computer)

\$349.00

FEATURES:

- No Front Panel Needed
 Z-80 CPU (2 or 4 MHZ)
- IK RAM
- A ROM/PROM Sockets for 4K/8K of Memory SYNCHRONOUS/ASYNCHRONOUS Serial I/O with RS-232 and Current Loop Interface and Software
- Programmable Baud Rate
- Parallel Input Port
 Parallel Output Port
 4 Channel Timer/Counter
- Vectored Interrupts

\$349.00 \$149.00 \$475.00

\$899.00

This Powerful Threesome Operates Together to Form A Complete Computer for Your System

Z-80 Programming Manual IN DEPTH DETAIL OF THE Z-80 CPU MICRO-COMPUTER

S. D. SALES SPECIAL \$9.95

RAMS

| 21L02 - 500NS | 8/11.50 |
|---------------|----------|
| 21L02 - 250NS | 8/15.95 |
| 2114 - 4K | 14.95 |
| 1101A - 256 | 8/\$4.00 |
| 1103 - 1K | |
| MK 4115 - 8K | 19.45 |
| 74S 200 - 256 | 3 95 |

CPU's

| _ | | |
|---|-----------------------|-------|
| | Z-80 includes manual | 29 95 |
| | Z-80A includes manual | 34 95 |
| | 8080A CPU 8 BIT | 11 95 |
| | 8008 CPU 8 BIT | 6 95 |

PROMS

| 1702A - 1K - 1.5us | | |
|--------------------|-------|-------------|
| 2708 - 8K - 450ns | | . 14.95 |
| 5204 - 4K | | 7.95 |
| 82S129 — 1K | | 2.50 |
| 2708U 8K signetics | 650ns | 9.95 |

COUNTER CHIPS

| L | |
|---|--------------------------------------|
| | MK50397 6 Digit elapsed timer . 8.95 |
| ı | MK50250 Alarm clock4.99 |
| ı | MK50380 Alarm chip2.95 |
| ı | MK50395 6 digit up/dn. count. 12.95 |
| ı | MK5002 4 digit counter8.95 |

S.D. NOW HAS SOFTWARE FOR IT'S CUSTOMERS

CP/M" DISK OPERATING SYSTEM . . . \$99.95

CP M is a powerful disk operating system which has become an industry standard. It is compatible with several disk based FORTRAN and BASICS. This package includes a CP/M diskette (mini or full size) adapted for S.D.'s SBC-100/VERSAFLOPPY EXPANDORAM board set. Complete documentation is included. (ECP/M is a reg. istered trademark of Digital Research Corp., Pacific Grove, CA.

Z-80 DISK BASED ASSEMBLER \$69.95

Runs on ANY CP/M based disk system. Assembles the official Zilog-Mostek Mnemonics. Contains extensive set of pseudo-ops. Available on mini or full size diskette.

VERSAFLOPPY CONTROL FIRMWARE . . . \$24.95

Provides control for VERSAFLOPPY and boots up CP/M. This runs on Z-80, 8080 or 8085 based computers. Available in 2708 or 2758 prom.

SD MONITOR

Powerful monitor for SBC-100 single board computers. Includes all VERSAFLOPPY control firmware. Comes in 2716 prom. Available in 4-6 weeks.

VERSAFLOPPY DIAGNOSTIC PROGRAM . . . \$24.95

Provides routines which are helpful in checking out a disk based system Available in 2708 or 2758 prom.

MICROPROCESSOR CHIPS

| 8212 - 1/0 port3.50 |
|----------------------------------|
| 8214 — P.I.C12.95 |
| 8216 - Non Invert Bus 4.95 |
| 8224 — Clock Gen 4.95 |
| 8226 — Invert Bus3.95 |
| 0220 — Iliveit bus |
| PIO for Z—8014.95 |
| CTC for Z—8014.95 |
| 8228 Sys. Controller8.20 |
| 8251 Prog. comm. interfact 10.95 |
| 8255 prog. prep. interface13.50 |
| 8820 Dual Line Recr 1.75 |
| 8830 Dual Line Dr1.75 |
| |
| 2513 Char. Gen7.50 |
| 8838 Quad Bus. Recvr 2.00 |
| 74LS138N — 1/8 decoder99 |
| 8T97-Hex Tri-State Buffer1.25 |
| 1488/1489 RS2321.50 |
| TR 1602B Uart3.95 |
| TR 1863 Uart8.50 |
| FD 1771B-139.95 |
| |

CMOS

99

| ١ | 4002 | 19 | 4042 | 69 |
|---|------|----|-------|------|
| ı | 4011 | 19 | 4047 | 1.50 |
| ١ | 4013 | 32 | 4049 | 35 |
| ı | 4016 | 32 | 4069 | 23 |
| ı | 4017 | 95 | 4071 | 19 |
| ı | 4020 | 97 | 4076 | 97 |
| ı | 4022 | 97 | 14518 | 1.10 |
| ı | 4024 | 75 | 14528 | 85 |
| ı | 4027 | 39 | 14529 | 85 |

| MK50397 6 Digit | elapsed timer | 8.95 |
|------------------|---------------|-------|
| MK50250 Alarm | clock | .4.99 |
| MK50380 Alarm | | |
| MK50395 6 digit | | |
| MK5002 4 digit c | | |
| MK5021-Cal. chip | sq. root | .2.50 |

SUPER FLOPPY SPECIAL

S. D. SALES' VERSAFLOPPY S-100 CONTROLLER BOARD PLUS SHUGART SA 400 FLOPPY DISK DRIVE INCLUDING CABLE FOR ONLY

\$479.00

CALL IN YOUR BANKAMERICARD (VISA) OR MASTER CHARGE OR-DER IN ON OUR CONTINENTAL TOLL FREE WATTS LINE:

-800-527-3460

Texas Residents Call Collect: 214/271-0022 DEALER INQUIRIES INVITEDI







(All prices subject to change

without prior notice.)



NO COD'S. TEXAS RESIDENTS ADD 5% SALES TAX. ADD 5% OF ORDER FOR POSTAGE & HANDLING. OR DERS UNDER \$10. ADD 75c HAND-LING FOREIGN ORDERS — U. S. **FUNDS ONLY!**

FAIRCHILD FND 507 and HP 5082-7750

1/213 Common Anode READOUTS



STOCK NO. 5616F is a $3\frac{1}{2}$ digit assembly, (3 digits and \pm 1). The assembly has been removed from equipment. The 4 readouts are guaranteed. You may also find an SN7447 driver/decoder and segment dropping resistors. Transistors have been removed.

STOCK NO. 5616F

31/2 digit display, (4 readouts)

\$2.50

3/6.00

STOCK NO. 5620F is a 4½ digit HEWLETT-PACKARD 5082-7750 common anode display, ½" high. This assembly has been removed from equipment, and the 5 readouts are guaranteed. You might also find on the assembly segment dropping resistors and IC drivers. Transistors have been removed.

STOCK NO. 5620F

41/2 digit display, (5 readouts)

\$3.50

3/9.00



RCA NUMITRON 21/2 and 31/2 DIGIT ASSEMBLIES

These units consist of $2\frac{1}{2}$ and $3\frac{1}{2}$ digit assemblies of RCA NUMITRON 7 segment incandescent readouts, plus a \pm readout. These readouts lend themselves to use of many different color filters, so that almost any color is obtainable. These assemblies are out of equipment, and most contain several logic chips, and a trimpot for adjusting brightness. Many of the $2\frac{1}{2}$ digit chips contain 3 SN7475s and 2 SN74472. The $3\frac{1}{2}$ digit assemblies may contain 3 SN7447s, 2 SN74174s and a SN7475.

STOCK NO. 5622F STOCK NO. 5621F 21/2 digit RCA NUMATRON ASSEMBLY


\$3.00

2/5.00

31/2 digit RCA NUMITRON ASSEMBLY

\$4.50

2/8.00



TEXAS INSTRUMENT TIL 307 7 SEGMENT READOUT WITH LOGIC (COUNTER—LATCH—DECODER).

The TEXAS INSTRUMENT TIL-307 is a 7 segment readout, with all the logic necessary for counters built into the chip. This simplifies devices, and makes for small packages in instrumentation. The overall dimensions of the readout are 3/8" x 1" and the digit is .270". The device mounts in a 16 pin DIP socket, and all that is needed is the input signal. These devices cost \$11.71 each at the distributors. The ones we have are out of equipment, but are 100% guaranteed. We have 2 types, $3\frac{1}{2}$ digits, and $4\frac{1}{2}$ digits. The $3\frac{1}{2}$ digits contain 3 TIL 307s, and the $4\frac{1}{2}$ digits contain 4 TIL 307s. We provide data with these readouts. The $\frac{1}{2}$ digit in each case is a ± 1 .

STOCK NO. 5614F STOCK NO. 5619F 3½ digit TIL 307 with logic & data 4½ digit TIL 307 with logic & data

\$10.00 \$12.50 2/19.00 2/24.00

OVENAIRE ULTRA PRECISION CRYSTAL OSCILLATOR





Your computer is only as good as its clock, we have been fortunate in acquiring a lot of OVENAIRE precision crystal oscillators, Model OSC 67-11-A-3. The output frequency of these oscillators is 3.840 MHz. The frequency readily divides into many useable frequencies with the use of standard SN7400 series ICs. Among the many frequencies are 640 KHz, 60 KHz, 32 KHz, 20 KHz,

10 KHz, 6 KHz, 1 KHz, 600 Hz, 100 Hz, 60 Hz, 50 Hz and many more. We provide data showing the ICs needed to get these frequencies. The oscillator is precise to 2 parts per million, and is adjustable to even greater precision. Ideal for computers, frequency standards, clocks, etc. This oscillator is a current production item, and the one piece price at the factory is \$134.50. In lots of 100 the price is \$49.80, so our price of \$14.95 each is a fantastic bargain. 1 5/8" x 2" x 5/8". PC mount. Voltages required are 5 Vdc and 12 Vdc. Output is TTL compatible 5 Vdc. Sketch at left shows the complete unit, and an inside view.

STOCK NO. 5592K

Ovenaire Precision Crystal Oscillator

\$14.95 ea.

2/28.00

Enclose sufficient postage. Excess will be refunded. Send for NEW CATALOG 19, 120 pags of computer and electronic bargains.

MAIL ORDER

DELTA ELECTRONICS P.O. Box 2, 7 Oakland St. Amesbury, Mass. 01913 Over the counter salesroom

ATLANTA GA
DELTA ELECTRONIC HOBBIES
5151 Buford Hwy.
Doraville, Atlanta, Ga.

DELTA ELECTRONIC
WAREHOUSE OUTLET
590 Commonweath Ave,
Boston, Mass, is no longer
affiliated with DELTA
ELECTRONICS
D13

4804 STATIC, TTL IN/OUT 1024x4 N-MOS RAM

GENERAL DESCRIPTION

Part Number 4804 is a 4K semiconductor random access memory

organized as 1024 4-bit words. It is fully static and needs no clock or refresh pulses. It requires a single ±5 volt power supply and is fully TTL compatible on input and output lines. The 4804 is packaged in a convenient 18 pin dual-in-line package.

- Single +5V Power Supply
- 1Kx4 Organization
 Replaces 4 1024x1 Static RAMs
 Completely Static—No Clocks or Refresh
 18 Rip Replaces
- 18 Pin Package
 Access/Cycle 600 nsec max
- 250 mw Typical Operating Power
- Common I/O Bus
- TTL Compatible I/O
 Three State Outputs

TRUTH TABLE

| | CE | R/W | DI/DO | STATUS | MODE |
|---|----|---------------|-----------|----------|------------|
| | Н | Don't Care | High Z | Deselect | Standby |
| Ī | L | Н | Data | Selected | READ |
| | L | L | L | Selected | Write 0 |
| Ì | L | L | Н | Selected | Write 1 |

FEATURES

WRITE CYCLE-AC CHARACTERISTICS

| PARAMETER | SYMBOL | MIN 48 | 04 MAX |
|---|--------|--------|-----------|
| CONTRACTOR OF THE PROPERTY OF | | | MAN |
| Write Cycle Time | Twc | 600 | |
| Address To Write Time | Taw | 100 | |
| Write Pulse Width | Twp | 500 | |
| Write Recovery Time | Twn | 0 | |
| Data Set Up Time | Tow | 350 | |
| Data Hold Time | Тон | 0 | |
| Output Disable From Write or Chip Enable | Тотw | | 150 |

READ CYCLE—AC CHARACTERISTICS

| PARAMETER | SYMBOL | MIN 48 | MAX |
|---|--------|--------|-----|
| Read Cycle Time | TRC | 600 | |
| Access Time | TA | | 600 |
| Chip Enable to Output Enable | Tco | | 200 |
| Data Valid After Address | Тоні | 150 | |
| Previous Data Valid After Chip De-Select | Тонг | 25 | |

8/\$60.00 16/\$100.00

INTEGRATED TONE RECEIVER MK5102(N)-5

FEATURES

- Detects all 16 standard DTMF digits
- Requires minimum external parts count for minimum system cost
- Uses inexpensive 3.579545 MHz crystal for
- Digital counter detection with period averaging insures minimum false response
- 16-pin package for high system density
- Single supply 5 Volts ± 10%
- Output in either 4-bit binary code or dual 2-bit
- row/column code

 Latched outputs

The MK5102 is a monolithic integrated circuit Ine MKS102 is a monotime integrated circuit fabricated using the complementary-symmetry MOS (CMOS) process. Using an inexpensive 3.579545 MHz television colorburst crystal for reference, the MK5102 detects and decodes the 8 standard DTMF frequencies used in telephone dialing. The requirement of only a single supply and its construction in a 16-pin package make the MK5102 ideal for applications of the processor cations requiring minimum size and external parts

DETECTION FREQUENCY

| Low Group to | High Group to | | |
|----------------|--------------------|--|--|
| Row 1 = 697 Hz | Column 1 = 1209 Hz | | |
| Row 2 = 770 Hz | Column 2 = 1336 Hz | | |
| Row 3 = 852 Hz | Column 3 = 1477 Hz | | |
| Row 4 = 941 Hz | Column 4 = 1633 Hz | | |

MK5102N-5.....\$34.95 Colorburst crystal for above.....\$1.75



10 AMP REGULATORS 78P05

GENERAL DESCRIPTION- The uA78P05 is a 3-terminal positive 55 Nybrid regulator capable of delivering 10 Amps! This device is virtually blowout proof and contains all the protection features inherent in monolithic regulators such as internal short-ciruit current limiting and thermal-overload protection. The uA78P05 is packaged in a hermetically sealed TO-3 providing 50W at 25° The hybrid consists of a monolithic control chip driving a rugged Mesa transistor. The high output current is achieved through new design technique without sacrificing the regulation characteristics of the controlling elements. The same process is employed in the construction of the 10A regulator to provide the same high reliability obtained in the uA78H05 5A regulator.

10 A OUTPUT CURRENT INTERNAL THERMAL-OVERLOAD PROTECTION INTERNAL SHORT-CIRCUIT CURRENT LIMIT LOW DROP-OUT VOLTAGE 2.2 V AT 10 A SO W POWER DISSIPATION PIN-FOR-PIN COMPATIBLE WITH THE µA76H05, µA78H05A AND SH232 (0 0

CONNECTION DIAGRAMS
TO-3 PACKAGE
(TOP VIEW) 78P05SC......\$12.95 Specs.....

MULTI-CHANNEL 8 BIT A/D CONVERTER


Fairchilds' new 6 channel analog-to digital converter has a lot going for it. Full scale correction capabilities, ratiometric con version and wide input dynamic range.


Micro-processor compatible, it combines the multiplexer, decoder and sample-and -hold functions with converter to save board space and eliminate external parts. It provides 8 bit, +2 LSB conversion in 300 uSec featuring auto-zero and dynamic range all the way to ground.

UA9708 in 16 pin plastic DIP......\$7.951

THE THIRD HAND

- · This versatile tool has proven its worth through generations of use by professional craftsmen.
- . The Third Hand holds work in any position freeing both hands to perform other vital functions.





· FREES HANDS

Dixon Third Hand...\$7.95

4801 STATIC, TTL IN/OUT 4096×1 N-MOS RAM

DESCRIPTION

Part Number 4801 is a 4K semicon ductor random

FEATURES



access memory
organized as 4096 1-bit words. It is fully static and
needs no clock or refresh pulses. It requires a
single +5 volt power supply and is fully TTL compatible on input and output lines. The 4801 is packaged in a convenient 18 pin dual-in-line

- Single +5V Power Supply 4Kx1 Organization
- Replaces 4 1024x1 Static RAMs
- Completely Static—No Clocks or Refresh
 18 Pin Package
 Access/Cycle Times 600 nsec max
 250 mw Typical Operating Power

- Separate Data In and Data Out
 TTL Compatible I/O
 Three State Outputs
 Data Bus Compatible I/O Function

| CE | R/W | DI | DO | STATUS | MODE |
|----|---------------|---------------|-----------|----------|------------|
| Н | Don't Care | Don't Care | High Z | Deselect | Standby |
| L | Н | Don't Care | Data | Selected | READ |
| L | L | L | High Z | Selected | Write 0 |
| L | L | Н | High Z | Selected | Write 1 |

TRUTH TABLE

WRITE CYCLE-AC CHARACTERISTICS

| PARAMETER | SYMBOL | MIN 48 | MAX |
|---|--------|--------|-----|
| Write Cycle Time | Twc | 600 | MAX |
| Address To Write Time | Taw | 100 | |
| Write Pulse Switch | Twp | 500 | |
| Write Recovery Time | Twn | 0 | |
| Data Set Up Time | Tow | 350 | |
| Data Hold Time | Тон | 0 | |
| Output Disable From Write or Chip Enable | Тотw | | 150 |

READ CYCLE-AC CHARACTERISTICS

| PARAMETER | SYMBOL | 4801 MIN MAX | | |
|---|--------|-----------------|-----|--|
| Read Cycle Time | TRC | 600 | | |
| Access Time | TA | | 600 | |
| Chip Enable to Output Enable | Tco | | 200 | |
| Data Valid After Address | Тонт | 150 | | |
| Previous Data Valid After Chip De-Select | Тонг | 25 | | |

16/\$100.00 \$8.95 8/\$60.00

VOLTAGE REGULATORS

| ١ | 7805-06-08-12-15-24 TO 220 | 95¢ | 5/\$4.50 |
|---|--|------|--|
| | 78L05A-12-15 4% 100 mA TO-92 Plastic 78H05KC 5V 5A TO-3 78H12KC 12V 5ATO-3 78H15KC 15V 5ATO-3 78H15KC 15V 5ATO-3 Lm317K 1.5A Adjustable TO-220 Lm317M - 5A Adjustable TO-202 TL430C Adjustable IO-202 TL430C Adjustable Zener-Think About It TL49TC switching Reg. & Inductor | | 50¢ 8.45 9.15 9.15 4.99 3.99 13.95 9.50 |
| 1 | RCA CA 3085 100 mA <i>Adjustable</i> Signetics 2504TA 1024 bit S.R., memory (1) | 4044 | .60 |
| | MCM 6571P Character Generator MCM6571AP Character Generator | 4044 | 9.95 9.95 |
| ١ | MC14409P Telephone Rotary Pulser | | 10.98 |
| | MC14419P Touch Pad Converter for 14409 MC14411P Baud Rate Generator | | 4.25 11.98 |
| | MC14412VP CMOS Modem Chip | | 16.95 |
| | MM57109N Number Cruncher Micro 74C915 7 Segment to BCD Converter | | 18.95 2.99 |
| | 74C922 16 Key Keyboard Encoder | | 6.35 |
| | 74C923 20 key Keyboard Encoder | | 6.45 |
| | 74C925 4 Decade Counter w/latches 74C926 4 Decade Counter w/carry | | 12.00 12.00 |
| | 74C935-1 3½ Digit DVM CMOS Chip | | 16.98 |
| | Complete and the last than the second | | 100 |



Jumper Kits for .025 Square Posts... All material for making jumpers for quick circuit changes and prototyping. Use for breadboarding, trouble shooting, field modifications. Fits standard IC socket wire/wrap posts. Excellent wiping action on gold plated box contacts. Kit contain 10 box contacts, heat

shrinkable sleeving, and 5 feet of wire plus instruction

JCK-5101....(5 double jumpers)\$2.75, 4 kits/\$10.00

DEALER PRICING AVAILABLE UPON REQUEST

TRI-TEK

- C.O.D. NO parcel post C.O.D. UPS C.O.D. Add 85¢ to order
- Any correspondence not connected with your order, please use separate sheet and include SASE for reply.
- Orders less than \$10 (\$15 foreign) please add \$1 handling.
- Prices are subject to change without notice.

 Any refunds will be by check, not credit vouchers
- Terms, Check, money order, credit card. Net 30 days to rated firms, schools and government agencies.
- We pay surface shipping only in USA, Canada and Mexico.
- For premium shipping (first class, special handling, etc.) add extra. Excell will be refunded.
- Foreign orders (except Canada and Mexico) estimate and add shipping. Excess will be refunded.

Charge card telephone orders (\$20 min.) will be accepted 9-5:30 P.M. except weekends. Telephone 995-9352. No collect calls please.

QUESTION:

"Why are more and more dealers carrying Godbout/Compukit™ products?"

ANSWER:

"They like happy customers"

SEE

ECONORAM™ IN PERSON AT A STORE NEAR YOU

ALABAMA

COMPUTER CENTER 433 VALLEY AVE. BIRMINGHAM, ALA. 35209 (205) 942-8567

ICP, COMPUTERLAND 1507 CHAMBLISS LANE BIRMINGHAM, ALA. 35226 (205) 979-0707

ARIZONA

BITS & BYTES COMPUTER 6819-C NORTH 21ST AVE. PHOENIX, AZ 85015 (602) 242-2507

PERSONAL COMPUTER PLACE 1840 W. SOUTHERN MESA, AZ 85202 (602) 833-8949

CALIFORNIA

BYTE SHOP OF BERKELEY 1514 UNIVERSITY AVE BERKELEY, CA 94703 (415) 845-6366

BYTE SHOP OF CITRUS HEIGHTS 8041 GREENBACK LANE CITRUS HEIGHTS, CA 95610

BYTE SHOP OF FAIRFIELD 87 ALDER STREET SUISUN CITY, CA 94585 (707) 422-3515

BYTE SHOP OF LAWNDALE 16508 HAWTHORNE BLVD. LAWNDALE, CA 90260 (213) 371-2421

BYTE SHOP OF LONG BEACH 5453 E. STEARNS LONG BEACH, CA 90815 (213) 597-7771

BYTE SHOP OF PASADENA 496 SOUTH LAKE AVE. PASADENA, CA 91101 (213) 684-3311

BYTE SHOP OF SAN DIEGO 8250 H VICKERS ST. SAN DIEGO, CA 92111 (714) 565-6060

BYTE SHOP OF SAN JOSE 2626 UNION AVE. SAN JOSE, CA 95124 (408) 377-4685

BYTE SHOP OF SANTA BARBARA

4 WEST MISSION SANTA BARBARA, CA 93101 (805) 966-2638

BYTE SHOP OF SANTA CLARA 3400 EL CAMINO REAL SANTA CLARA, CA 95051 (408) 249-4221 BYTE SHOP OF TARZANA

18424 VENTURA BLVD. TARZANA, CA 91356 (213) 343-3919

BYTE SHOP OF THOUSAND OAKS 2707 THOUSAND OAKS BLVD. THOUSAND OAKS, CA 91360 (805) 497-9595

BYTE SHOP OF TUSTIN 674 EL CAMINO REAL TUSTIN, CA 92680 (714) 731-1686

BYTE SHOP OF WALNUT CREEK 2989 NORTH MAIN WALNUT CREEK, CA 94596 (415) 933-6252

BYTE SHOP OF WESTMINSTER 14300 BEACH BLVD. WESTMINSTER, CA 92683 (714) 894-9131

COMPUTERLAND OF DUBLIN 6743 DUBLIN BLVD. DUBLIN, CA 94566 (415) 828-8090

COMPUTERLAND OF INGLEWOOD 6840 LA CIENEGA BLVD. INGLEWOOD, CA 90302 (213) 776-8080

COMPUTERLAND OF SAN DIEGO 4233 CONVOY STREET SAN DIEGO, CA 92111 (714) 560-9912

COMPUTER COMPONENTS 5848 SEPULVEDA BLVD. VAN NUYS, CA 91411 (213) 786-7411

COMPUTER STOP CORP 16919 HAWTHORNE BLVD. LAWNDALE, CA 90260 (213) 371-4010

HALTEK ELECTRONICS 1062 LINDA VISTA MT. VIEW, CA 94040 (415) 969-0510

I.C. ELECTRONICS SUPPLY 619 W. KATILLA AVE ORANGE, CA 92667 (714) 633-2382

I.C. ELECTRONICS SUPPLY 4861 CONVOY STREET SAN DIEGO, CA 92111 (714) 292-5484

I.C. ELECTRONICS SUPPLY 16723.ROSCOE BLVD VAN NUYS, CA 91406 (213) 894-8171

ODD ASSORTMENT 4980 B PACHECO BLVD. PACHECO, CA 94553 (415) 228-4180

P.C.E. ELECTRONICS 4782 DEWEY DRIVE FAIR OAKS (SACTO), CA 95628 (916) 966-7033

CANADA

ORTHON HOLDINGS LTD. 12411 STONY PLAIN ROAD EDMONTON, ALBERTA CANADA T5N 3N3 (403) 488-2921

PACOM DISTRIBUTORS, INC. 4509 RUPERT STREET VANCOUVER, B.C. CANADA V5R 2J4 (604) 435-3282

TJB MICROSYSTEMS LTD. 10991 - 124TH ST. EDMONTON, ALBERTA CANADA T6E 5G7 (403) 455-5298

COLORADO

POOR RICHARD'S CALCULATOR CO. 204 WEST LAUREL FT. COLLINS, CO 80521 (303) 221-1776

SOUND-TRONIX 900 - 9TH AVE. GREELEY, CO 80631

ALTAIR COMPUTER CENTER 6220 SO. ORANGE BLOSSOM TRAIL ORLANDO, FL 32809 (305) 851-0913

COMPUTER STORE 1549 W. BRANDON BLVD. BRANDON FL 33511 (813) 685-7659

GEORGIA

DATAMART, INC. 3001 N. FULTON DR. ATLANTA, GA 30305 (404) 266-0336

HAWAII

COMPACT COMPUTERS 1009 UNIVERSITY AVE. HONOLULU, HI 96826 (808) 949-1557

SMALL COMPUTER SYSTEMS 3149 C WAIALAE AVE HONOLULU, HI 96816 (808) 732-5246

ILLINOIS

BYTE SHOP OF ILLINOIS S. NEIL STREE CHAMPAIGN, ILL 61820 (217) 352-2323

ILLINI MICRO COMPUTERS 612 E. OGDEN NAPERVILLE, ILL 60540 (312) 420-8813

IOWA

BRIDGE ELECTRONICS 216 - 8TH AVE. SO CLINTON, IOWA 52732 (319) 243-8282

COMPUTER STORE OF DAVENPORT 4128 BRADY STREET DAVENPORT, IOWA 52806 (319) 386-3330

CONTEMPORARY COMPONENT SALES, INC. BOWMAN FIELD ADMINISTRATION BLDG. LOUISVILLE, KY 40205 (502) 458-4848

LOUISIANA COMPUTER SHOPPE, INC. 3828 VETERANS BLVD. METAIRIE, LA 70002 (504) 454-6600

COLOMA COMPUTER CO. 5647 JILL ANN DRIVE COLOMA MI 49038 (616) 468-4145

MICRO COMPUTER WORLD 313 MICHIGAN NE GRAND RAPIDS, MI 49503 (616) 451-8972

COMPUTER MART 1800 W. 14 MILE ROYAL OAK, MI 48073 (313) 576-0900

DOUG BRINKS SOUND 675 WEST RIVER ROAD KAWKAWLIN, MI 48631 (517) 662-6767

LUZIER ELECTRONICS 22530 GORDON ST. CLAIR SHORES, MI 48081 (313) 773-9535

P.S. INC. — RES. LABS 1625 FIRST AVE. NO. MOORHEAD, MINN 56560 (218) 233-6682

NEBRASKA

NEVADA

CENTURY 23 4566 SPRING MOUNTAIN ROAD LAS VEGAS, NV 89102 (702) 876-7997

NEW JERSEY

COMPUTER EMPORIUM BLVD. 103 — AVE. OF COMMERCE 2428 ROUTE 38 CHERRY HILL, NJ 08002 (609) 667-7555

S-100 INC. 7 WHITE PLACE CLARK, NJ 07066 (201) 382-1318

NEW YORK

COMPUTER MICRO SYSTEMS 1311 NORTHERN BLVD. MANHASSETT,NY 11030 (516) 627-3640

COMPUTER STORE OF NEW YORK 55 WEST 39TH STREET NEW YORK, NY 10018 (212) 221-1404 COMPUTER TREE, INC.

COMPUWORLD INC. 2930 W. HENRIETTA ROAD ROCHESTER, NY 14623 (716) 424-1300

MEMORY MERCHANTS, INC. 1350 BUFFALO ROAD ROCHESTER, NY 14624 (716) 328-5585

NORTH CAROLINA

BYTE SHOP OF GREENSBORO 218 N. ELM STREET GREENSBORO, NC 27401 (919) 275-2983

BYTE SHOP OF RALEIGH 1213 HILLSBOROUGH ST. RALEIGH, NC 27605 (919) 833-0210

ROM'S N RAM'S CRABTREE VALLEY MALL RALEIGH, NC 27612 (919) 781-0003

OHIO

BYTE SHOP OF OHIO 19524 CENTERRIDGE ROAD ROCKY RIVER, OHIO 44116 (216) 333-3261

CYBERSHOP 1451 SOUTH HAMILTON COLUMBUS, OHIO 43227 (614) 239-8081

BILL GODBOUT ELECTRONICS BOX 2355, OAKLAND AIRPORT, CA 94614

BITS, BYTES & MICROS 2918 N. MACARTHUR BLVD. OKLAHOMA CITY, OK 73127 (405) 947-5646

OREGON

ALTAIR COMPUTER CENTER 8105 SW NIMBUS AVE. BEAVERTON, OR 97005 (503) 644-2314

PENNSYLVANIA

ERIE COMPUTER CO. 1253 WEST 8TH ERIE PA 16502 (814) 454-8691

MICRO-COMPUTER PRODUCTS, INC. 116 SOUTH PUGH ST. STATE COLLEGE, PA 16801 (814) 238-7711

PERSONAL COMPUTER CORP. FRAZER MALL FRAZER, PA 19355 (215) 647-8463

COMPUTERLAND OF AUSTIN 3300 ANDERSON LANE AUSTIN, TX 78757 (512) 452-5701

COMPUTER PORT 926 N. COLLINS ARLINGTON, TX 76011 (817) 469-1502

COMPUTER SHOP OF SAN ANTONIO 6812 SAN PEDRO SAN ANTONIO, TX 78216 (512) 828-0553

COMPUTERS 'N THINGS 2825 HANCOCK DRIVE AUSTIN, TX 78731 (512) 453-5970

MICRO COMPUTER SHOP 5301 EVERHART ROAD CORPUS CHRISTI, TX 78411 (512) 855-4516

NEIGHBORHOOD COMPUTER STORE 4902 — 34TH ST., SUITE 20 LUBBOCK, TX 79410 (806) 797-1468

UNITED KINGDOM

COMPUTER CENTRE
20 DURNSFORD AVE.
FLEET, HANTS
UNITED KINGDOM GU13 9TB
02514-29607 VIRGINIA

HOME COMPUTER CENTER, INC. 2927 VIRGINIA BEACH BLVD. VIRGINIA BEACH, VA 23452 (804) 340-1977 WASHINGTON

COMPUTER SHOP OF SPOKANE S. 107 WALL STREET SPOKANE, WA 99204 (509) 456-0311

PERSONAL COMPUTERS SO. 104 FREYA SPOKANE, WA 99202 (509) 534-3955

RETAIL COMPUTER STORE 410 NE 77TH STREET SEATTLE, WA 98115 (206) 524-4101 YE OLDE COMPUTER SHOPPE, INC. 1301 GEORGE WASHINGTON WAY RICHLAND, WA 99352 (509) 946-3330

WEST VIRGINIA

COMPUTER STORE OF CHARLESTON SUITE #5, MUNICIPAL PARKING BLDG. CHARLESTON, W. VA 25301 (304) 345-1360



If you are or are considering to be an owner of either a VIM-1 or KIM-1 microcomputer system, we are DEAR CUSTOMERS AND FUTURE CUSTOMERS: announcing a full set of expansion boards specifically designed for you. No longer will you have the announcing a run set of expansion boards specifically assigned for you. Two longer win you have the aggravation and cost of finding out which of the S-100 Bus Boards might work (a good number of them will not) and what modifications may be needed to make them a part of your system. The S-100 Bus Boards were designed to meet the 8080 microprocessor's timing requirements which are quite different from that of the designed to meet the 5000 interoprocessor's thining requirements which are quite different from that of the 6502 microprocessor. The boards described on the next page are our initial offering in expansion boards designed specifically for the VIM-1 and the KIM-1 systems. There are more items such as an intelligent floppy disk system, I/O board, wire-wrap board, etc. that are now in our design engineering group.

Have you ever had or been concerned about the misfortune of losing many hours of work because of a failure. And then, to make things worse, find yourself without your system for weeks while it is being repaired. Well, all products that we manufacture are designed to meet or exceed industrial standards. All components are first quality and meet full manufacturer's specifications. All this and an extended burn-in is done to reduce the normal percentage of field failures by up to 75%. To you, this means the chance of inconvenience and lost time due to a failure is very rare; but, if it should happen, we guarantee a turn-around time of less than forty-

Our money-back guarantee: If, for any reason you wish to return any board that you have purchased directly from us within ten (10) days after receipt, complete, in original condition, and in original shipping eight hours for repair. carton; we will give you a complete credit or refund less a \$10.00 restocking charge per board.

In order to serve you more efficiently, we are moving our corporate offices to Phoenix, Arizona. This move will combine our offices with our existing manufacturing facilities. This move will greatly increase our internal coordination and allow us to serve you even faster. EFFECTIVE 1 SEPTEMBER, 1978, our new address and phone number will be:

2967 W. Fairmount Ave., Phoenix, Arizona 85017 (602) 265-7564

If you are a dealer, we are looking for a few more qualified distributors for our quality products. Please send us a letter telling us about your operation, and, if you qualify, we will send you our dealer price list.

To facilitate your ordering, we have provided a handy order blank below:

Thank you.

Respectfully, Raymond n Bennett RNB ENTERPRISES, INC. Raymond N. Bennett President

THE EXCLUSIVE ALTERNATIVE FOR QUALITY



| Expiration date: _ | Signa | ture: | | | |
|--------------------|----------|-------|----------------|-----------------------|-------|
| ατν | ITEM | PRICE | QTY | ITEM | PRICE |
| | | | | | |
| | SUB TOTA | | | SUB | TOTAL |
| | 30B 101A | -1 11 | | | UNT\$ |
| | | | PA. AND AZ. RE | SIDENT MUST ADD SALES | TAX\$ |
| | | | | TOTAL AMOUNT OF OR | DER\$ |
| NAME: | | | | | |
| ADDRESS: | | | | | |
| CITY | | | _STATE: | _ZIP: | |

THE ALL NEW VIM-1 MICROCOMPUTER BY SYNERTEK SYSTEMS CORP.


IF YOU LIKE KIM* YOU WILL LOVE VIM

VIM-1 PROVIDES YOU WITH ON-BOARD EXPANSION. The printed circuit board includes sockets to add additional ROM, PROM, RAM, or Peripheral Ports when you require them.

SUPER SOFTWARE

Synertek has enhanced KIM-1* software as well as hardware. The software has simplified the user interface. The basic VIM-1 system is programmed in machine language. Monitor status is easily accessible, and the monitor gives the keypad user the same full functional capability of the TTY user.

This is the newest, most advanced 6502-based system available on the market today. The VIM-1 is hardware compatible to the KIM-1*. The manual even provides a cross-reference table to help convert KIM-1* software for use on the VIM-1. The VIM-1 has everything the KIM-1* has to offer, plus so much more that we cannot begin to tell you here. So, if you want to know more, the VIM-1 User Manual

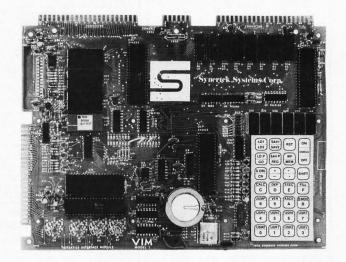

is available, separately, or, see page 124, June, 1978 issue of KILOBAUD magazine.

VIM-1 complete w/manuals \$269.00 VIM-1 User Manual Only \$7.00

EXPANSION BOARDS FOR VIM-1 & KIM-1*

These boards are set up for use with a regulated power supply such as the one below, but, provisions have been made so that you can add onboard regulators for use with an unregulated power supply. But, because of unreliability, we do not recommend the use of onboard regulators. All I.C.'s are socketed for ease of maintenance. All boards carry full 90-day warranty.

8-SLOT MOTHERBOARD

This motherboard uses the KIM-4* bus structure. It provides eight (8) expansion board sockets with rigid card supports, jacks for audio cassette, and fully buffered. VAK-1 motherboard \$129.00

2708 EPROM PROGRAMMER

This board requires a +5 VDC and +12 VDC, but has a DC to DC multiplyer so there is no need for an additional power supply. All software is resident in on-board Rom, and has a zero-insertion socket.

VAK-5 2708 Eprom Programmer

\$269.00

16K STATIC RAM BOARD

VAV-2 16V Dam Board with only

This board using 2114 Rams is configured in two (2) separately addressable 8K blocks with individual write-protect switches.

| VAK-2 TOK Halli Board With Only | \$239.00 |
|---------------------------------|----------|
| 8K of Ram (½ populated) | |
| VAK-3 Complete set of chips to | \$175.00 |
| expand above board to 16K | |
| VAK-4 Fully populated 16K Ram | \$379.00 |

EPROM BOARD

This board will hold 8K of 2708 or 2758, or 16K of 2716 or 2516 Eproms. *Eproms not included.*

VAK-6 Eprom Board

\$129.00

6220 00

POWER SUPPLIES

ALL POWER SUPPLIES are totally enclosed with grounded enclosures for safety, AC power cord, and carry a full 2-year warranty.



P.O. BOX 254 KING OF PRUSSIA, PA. 19406 R20 (215) 279-7968

FULL SYSTEM POWER SUPPLY

This power supply will handle a microcomputer and up to 65K of our VAK-4 RAM. ADDITIONAL FEATURES ARE: Over voltage Protection on 5 volts, fused, AC on/off switch. Equivalent to units selling for \$225.00 or more.

Provides +5 V. DC @ 10 Amps & ± 12 V. DC @ 1 Amp VAK-EPS Power Supply \$125.00


KIM-1* Custom P.S. provides 5 V. DC @ 1.2 Amps and+12 V. DC @ .1 Amps


KCP-1 Power Supply \$41.50

VIM-1 Custom P.S. provides 5 V. DC @ 1.4 Amps VCP-1 Power Supply

\$41.50

*KIM is a product of MOS Technology

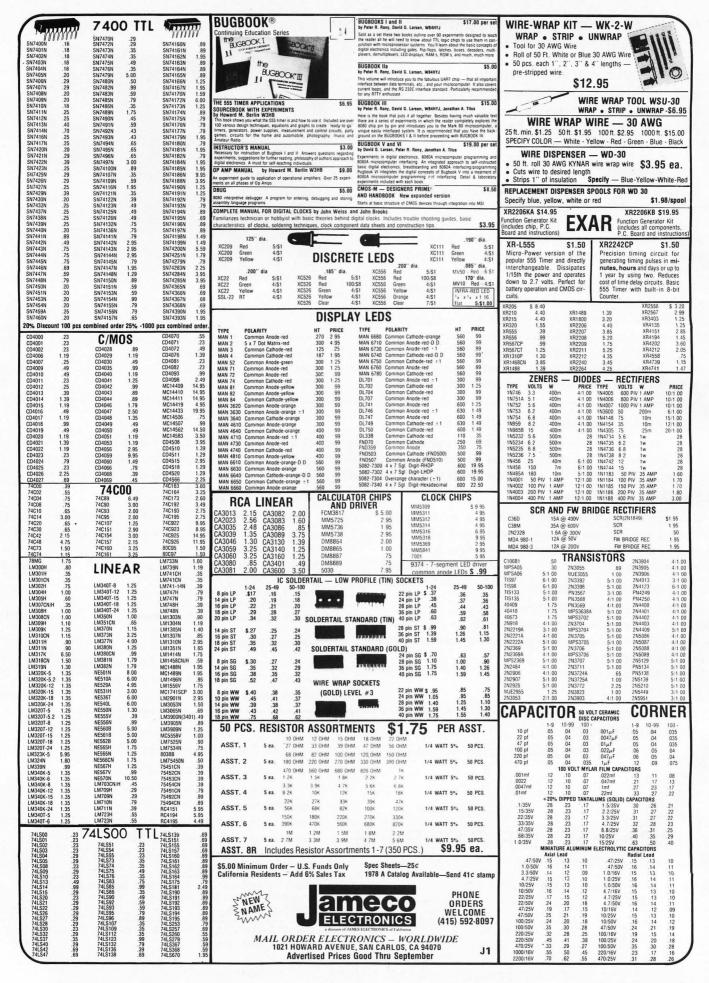

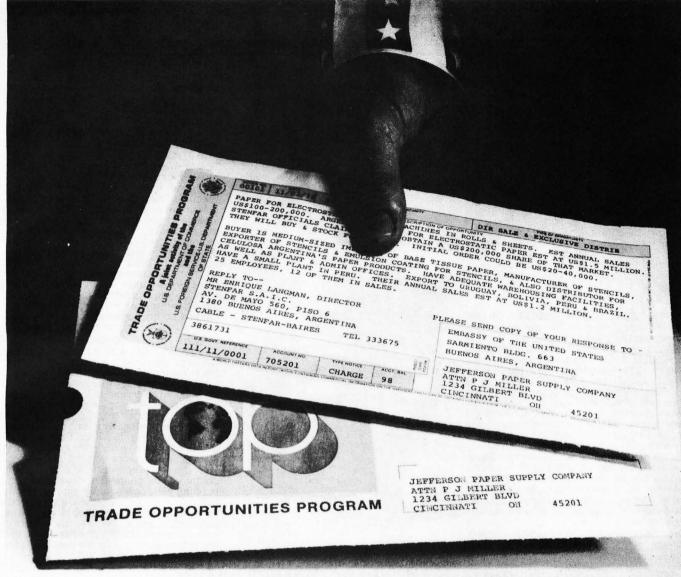

To get overseas trade leads like this, you could open offices in 127 countries.

Or use our computer.

The U.S. Commerce Department's computer-operated Trade Opportunities Program (TOP) can supply you with immediate, continuing, specific leads tailored to your sales objectives for any of 127 countries. So if you can't be all over the world at one time, we've got the answer. Send us the coupon now and see how you can find where the live leads are living.

Secretary of Commerce
U.S. Department of Commerce, BIC-9A
Washington, D.C. 20230
Please tell me more about the Trade Opportunities
Program (TOP).

Name
Title
Company
Address
City State Zip



NEW ADDITIONS TO THE KB BOOK NOOK

SPECIAL: PRE-PUBLICATION OFFER (orders will be filled on a first-in, first-out basis)

● HOW TO BUILD A MICROCOMPUTER—AND REALLY UNDERSTAND IT—BK7325—by Sam Creason. The electronics hobbyist who wants to build his own microcomputer system now has a practical "How-To" guidebook. Sam Creason's book is a combination technical manual and programming guide that takes the hobbyist step-by-step through the design, construction, testing and debugging of a complete microcomputer system. This book is must reading for anyone desiring a true understanding of small computer systems. \$9.95.*

● PROGRAMMING IN PASCAL—BK1140—by Peter Grogono. The computer programming language PASCAL was the first language to embody in a coherent way the concepts of structured programming which had been defined by Edsger Dijkstra and C. A. R. Hoare. As such it is a landmark in the development of programming languages. PASCAL was developed by Niklaus Wirth in Zurich; it is derived from the language ALGOL 60 but is more powerful and easier to use. PASCAL is now widely accepted as a useful language that can be efficiently implemented, and as an excellent teaching tool. This book is intended for people who want to write programs in PASCAL. It does not assume knowledge of any other programming language and it is therefore suitable for an introductory course. \$9.95.*

 MICROPROCESSOR LEXICON—ACRO-NYMS AND DEFINITIONS—BK1137— Compiled by the staff of SYBEX is a conve-





nient reference in pocket size format. Sections include acronyms and definitions, part numbers and their definitions, S-100 signals, RS232 signals, IEEE 499 signals, microcomputer and microprocessors, JETDS summary (military) and a code conversion table. \$2.95.*

• INSTANT BASIC—BK1131—by Jerald R. Brown. For the personal computer enthusiast or the user of DEC's BASIC PLUS language, here, finally, is a new book to teach you BASIC. It teaches BASIC to beginners using interesting programming ideas and applications that will be easily understood by the home computer programmer. BASIC PLUS users know that the two languages are very similar, so this book can be used by them as well. This is an "active participation" workbook, designed to be used with your home computer so you can learn by doing! Ideas are slowly introduced in a nonmathematical context so the beginner can quickly learn good programming techniques. \$6.00.*

• YOUR HOME COMPUTER—BK1172—by James White, is an introduction to the world of personal microcomputing. Written in clear and understandable language, this book tells you everything you want to know about home computing and gives the computer novice a painless introduction to microcomputer technology and terminology, beginning with what computers are and how they work. This basic book requires no prior knowledge or experience in electronics or computing.

It provides information about home computer kits, guidelines for selecting and building your own microcomputer, how to use your home computer and what you can do with it, lists of computer stores, clubs, periodicals, and answers to many more of your questions about microcomputers and the jargon surrounding the personal com-

puting scene today. \$6.00.*

- INSTANT SOFTWARE FROM KILOBAUD -

• INSTANT SOFTWARE FROM KB The following are the first of many prerecorded programs that will be available from Kilobaud. Each cassette is accompanied by a booklet that includes a hard-copy version of the program as well as a description of intended use. All cassettes are available at \$7.95* unless otherwise listed.

● BASIC LUNAR LANDER/INTERMEDIATE LUNAR LANDER—SP0101—by Ed Juge (for TRS-80TM) Your automatic landing system has malfunctioned and you are forced to make a manual landing. Taking control at 15,000 feet, the pilot's success requires precise manipulation of the lunar lander's retro-rockets. After mastering the basic game, the able commander will be taxed by the difficult intermediate program. \$7.95.*

● PERSONAL WEIGHT CONTROL/BIORHYTHMS—SP0105—by Microcosm (for the PETTM) Here's a program that will let you chart any individual's biorhythm cycle, showing physical, emotional, and intellectual highs and lows. If your neighbors find out you've got it, they will



never leave you in peace. **PERSONAL WEIGHT CONTROL** is a must for the dietconscious. Once your ideal weight has been determined, the program will calculate the correct daily caloric intake necessary to reach your goal over a certain time period. \$7.95.*

● SPACE TREK II—SP0102—by Ed Juge (for the TRS-80TM) This Space Trek game will challenge the most skillful and careful player. As commander of the Enterprise, you must defend the galaxy against enemy Klingon warships using your arsenal of phasers and photon torpedoes to best advantage. The Enterprise is also equipped with impulse power for moving within the quadrant, and warp power for jumping from quadrant to quadrant. \$7.95.*

● MORTGAGE WITH PREPAYMENT OPTION/FINANCIER—SP0106—by Microcosm (for the PETTM) Before you go to the bank, calculate your mortgage payment schedule and find out what you can afford. You will learn how much prepayments save, and can easily compare the true costs of variations in interest. FINANCIER is actually three programs in one and is guaranteed to make you a financial wizard. In part I, you'll learn to tell which investments will pay off. Part II calculates annual depreciation schedules, providing rates, amounts, and salvage values, which is great when tax time rolls around. The final section figures costs of borrowing, payment terms, and remaining balances on loans. \$7.95.*

● BEGINNER BACKGAMMON/KENO— SP0104 —by Fred Schilds and Ed Juge (for the TRS-80™) You will never be in need of a backgammon companion again! Schilds's program is designed for the newcomer to the game, but the computer's steady play will challenge the careless expert. KENO is a popular Las Vegas gambling game. As in many games of chance, the odds are against you, but when you win you can win big. \$7.95.*

* Use the order card in the back of this magazine or itemize your order on a separate piece of paper and mail to:
Kilobaud Book Department Peterborough NH 03458. Be sure to include check or detailed credit card information.
For orders under \$10.00, add \$1.00 shipping and handling.

KB BOOK NOOK

● HOBBY COMPUTERS ARE HERE!— BK7322—If you want to come up to speed on how computers work... hardware and software... this is an excellent book. It starts with the fundamentals and explains the circuits, the basics of programming, along with a couple of TVT construction projects, ASCII-Baudot, etc. This book has the highest recommendations as a teaching aid for newcomers. \$4.95.*

●THE NEW HOBBY COMPUTERS—BK7340—This book takes it from where "Hobby Computers Are Here!" leaves off, with chapters on Large Scale Integration, how to choose a microprocessor chip, an introduction to programming, low cost I/O for a computer, computer arithmetic, checking memory boards, a Baudot monitor/editor system, an audible logic probe for finding those tough problems, a ham's computer, a computer QSO machine . . . and much, much more! \$4.95*

•INTRODUCTION TO MICROPROCES-SORS—BK1032—by Charles Rockwell of MICROLOG is an ideal reference for the individual desiring to understand the hardware aspects of microprocessor systems. Describes the hardware details of computer devices in terms the beginner can understand, instead of treating the micro chip as a "black box." Specific systems are not described and programming is only briefly discussed. \$17.50 US and Canada, \$20 elsewhere.*

• BASIC NEW 2ND EDITION—BK1081 by Bob Albrecht. Self-teaching guide to the computer language you will need to know for use with your microcomputer. This is one of the easiest ways to learn computer programming. \$4.95.*


●SCIENTIFIC RESEARCH INSTRUMENTS' BASIC SOFTWARE LIBRARY is a complete do-it-yourself kit. Written in everybody's BASIC immediately executable in ANY computer with 4K, no other peripherals needed. Volume I contains business and recreational programs and is 300 pages. Volume II is 260 pages and contains math, engineering, statistics and plotting programs. Volume III contains money managing, advanced business programs such as billing, A/R, inventory, payroll, etc. Volume IV contains general purpose programs like loans, rates, retirement, plus games: Poker, Enterprise (take charge while Capt. Kirk is away), Football and more! Volume V is filled with experimenter's programs including games, pictures and misc. problems like "logic." Volume I—LB1002—& Volume II—LB1003—\$24.95* each, Volume III—LB1004—\$39.95*, Volume IV—LB1005—& Volume V—LB1006—\$9.95* each, Volume VI—LB1008—\$49.95*, Volume VII—LB1008—\$39.95.*

 MICROPROCESSOR INTERFACING TECHNIQUES—BK1037—by Austin Lesea & Rodnay Zaks will teach you how









to interconnect a complete system and interface it to all the usual peripherals. It covers hardware and software skills and techniques, including the use and design of model buses such as the IEEE 488 or S100. \$9.95*

• TTL COOKBOOK—BK1063—by Donald Lancaster. Explains what TTL is, how it works, and how to use it. Discusses practical applications, such as a digital counter and display system, events counter, electronic stopwatch, digital voltmeter, and a digital tachometer. \$8.95.

• CMOS COOKBOOK—BK1011—by Don Lancaster. Details the application of CMOS, the low power logic family suitable for most applications presently dominated by TTL. Required reading for every serious digital experimenter! \$9.95.*

● TVT COOKBOOK—BK1064—by Don Lancaster, describes the use of a standard television receiver as a microprocessor CRT terminal. Explains and describes character generation, cursor control and interface information in typical, easy-to-understand Lancaster style. \$9.95.

● THE "COMPULATOR" BOOK—BUILD-ING SUPER CALCULATORS & MINICOM-PUTER HARDWARE WITH CALCULATOR CHIPS—BK1012—by R. P. Haviland, provides ideas, design info and printed circuit boards for calculator chip projects, measure time, tie in with a Teletype to create a virtually infinite memory system, and countless other functions. \$7.95.*

• BASIC COMPUTER GAMES—BK1074—Okay, so once you get your computer and are running in BASIC, then what? Then you need some programs in BASIC, that's what. This book has 101 games for you, from very simple to real buggers. You get the games, a description of the games, the listing to put in your computer and a sample run to show you how they work. Fun. Any one game will be worth more than the price of the book for the fun you and your family will have with it. \$7.50.*

● WHAT TO DO AFTER YOU HIT RETURN
—BK1071—PCC's first book of computer
games . . . 48 different computer games
you can play in BASIC . . . programs, descriptions, many illustrations. Lunar Landing, Hammurabi, King, Civel 2, Qubic 5,
Taxman, Star Trek, Crash, Market, etc.
\$8.00.*

● KILOBAUD CODING SHEETS Kilobaud's dozen or so programmers wouldn't try to work without these handy scratch pads which help prevent the little errors that can cost hours and hours of programming time. Available for programming is Assembly/Machine Language (PD1001) which has columns for address, instruction (3 bytes), source code (label, op code, operand), and comments; and for BASIC (PD1002) which is 72 columns wide. 50 sheets to a pad. \$2.39.*

* Use the order card in the back of this magazine or itemize your order on a separate piece of paper and mail to:

Kilobaud Book Department • Peterborough NH 03458. Be sure to include check or detailed credit card information.

For orders under \$10.00, add \$1.00 shipping and handling.

Here's how the Computer Workshop works for you.

Our clients get the whole thing—total systems engineering. We can help you with evaluation and development of requirements for data processing and associated hardware, or give you management assistance in developing systems. We'll develop and design computer systems, and we'll design, organize and manage special training programs for your staff.

So even if your needs are minimal right now, we can be a big help. Then as your needs grow, you'll know where to come.

The Computer Workshop

Here are some of the firms we represent:

Alpha Microsystems
Cromemco
Digital Systems
Gimix, Inc.

North Star Computers
Polymorphic Systems
Seals Electronics
Smoke Signal Broadca

Gimix, Inc. Smoke Signal Broadcasting
Icom Southwest Technical Products Corp.
Industrial Micro Systems Technical Design Labs

Industrial Micro Systems
International Data Systems, Inc.
Lear Seigler

Technical Design Labs
Vector Graphics

Microcomputer Business Systems Micro Term, Inc.

THE COMPUTER WORKSHOP

Here's where to find us: Offices: Baltimore 4005 Seven Mile Lane, Baltimore, Md. 21208 (301) 486-5350/PITTSBURGH Robar Building, 4170 Wm. Penn Highway, Murraysville, Pa. 15660 (412) 327-0455/WASHINGTON, D.C. AREA 1776 Plaza, 1776 E. Jefferson Street, Rockville, Md. 20852 (301) 468-0455/NORTHERN VIRGINIA 5240 Port Royal Road, Suite 203, Springfield, Va. 22151 (703) 321-9047/KANSAS CITY 6 East Street, Parkville, Mo. 64152 (816) 741-5055

C31

73 Magazine's TEST EQUIPMENT LIBRARY

- VOLUME I: COMPONENT TESTERS How to build transistor testers, diode testers, IC testers, voltmeters and VTVM's. Crystal checking, temperature, aural meters for the blind, and loads of other miscellaneous data on meters . . . using them, making them more versatile. This is an invaluable book at \$4.95.*
- VOL. II: AUDIO FREQUENCY TESTERS This volume is jam packed with all kinds af audio frequency test equipment. If you're into SSB, RTTY, SSTV, etc., this book is a must for you... a great book for hi-fi addicts and experimenters, too! \$4.95 *





- VOL. III: RADIO FREQUENCY TESTERS Radio frequency waves, the common denominator of Amateur Radio. Such items as SWR, antenna impedance, line impedance, rf output and field strength; detailed instructions on testing these items includes sections on signal generators, crystal calibrators, grid dip oscillators, noise generators, dummy loads and much more. \$4.95.*
- VOLUME IV: IC TEST EQUIPMENT Become a troubleshooting wizard! ICs have greatly simplified even the most sophisticated pieces of test equipment, making them fun to build. You can save thousands of dollars by building your own equipment and have a test lab which would make a university jealous.

A brand new book, IC TEST EQUIPMENT, has construction projects for making 37 pieces of test equipment. Square wave generator, pulse generator, timer, audio synthesizer, AFSK generator, sync generator, counter, capacity meter, etc. Order this book today and get started building your own lab. \$4.95.*




WHO'S BEHIND THE —

(kilobaud)?

WHO'S THAT CLOWN BEHIND THE KILOBAUD?

One hint . . . no, it's not the editor of one of the other hobby computer magazines . . . this chap is the designer of one of (if not the) best selling RAM boards in history.

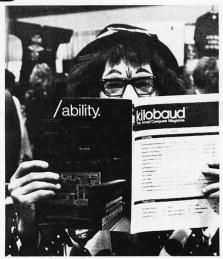



MYSTERY READER

Yes, Virginia, there really is a Bill Godbout, and he reads KILOBAUD... and loves it. Look at that smile. Bill has been reading his ad and is thinking of the truckloads of mail orders it will be bringing him. If you missed guessing Bill last month, then you will win the Dr. Watson award... half his name was showing over his right ear.

Subscribe Today!
For Instant Subscriptions Call Our Toll Free Number
1 (800) 258-5473

Have your credit card handy! -Kilobaud ● Peterborough NH 03458-

MOVING?

Let us know 8 weeks in advance so that you won't miss a single issue of *Kilobaud*.

Attach old label where indicated and print new address in space provided. Also include your mailing label whenever you write concerning your subscription. It helps us serve you promptly.

- ☐ Address change only
- ☐ Extend subscription
- ☐ Enter new subscription
- ☐ 1 year \$18.00
- ☐ Payment enclosed (1 extra BONUS issue)
- \square Bill me later

If you have no label handy, print OLD address here.

8 Name_____Call _____

Address _____


City_____State____Zip____

print NEW address here:

Name ______ Call _____

Address ______ State ____ Zip ____

● KILOBAUD ● PETERBOROUGH NH 03458 ●

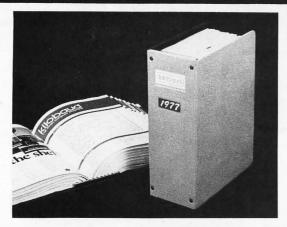

1977 kilobaud Binders

Keep your Kilobauds from being lost or damaged in these handsomely appointed binders with rich blue covers and gold lettering. Each binder holds 12 issues, making an EXCELLENT REFERENCE HANDBOOK. Several binders form a quality library you can be proud of.

Order yours today . . . only \$6.50 each . . . 2 for \$12.00.

Use the order card in the back of this magazine or itemize your order on a separate piece of paper and mail to:

KILOBAUD BINDERS ● PETERBOROUGH NH 03458
Be sure to include check or detailed credit card information

IS HARD COPY STORAGE A PROBLEM?



Kilobaud, as thick as it is, is more like a floppy when it comes to standing on the bookshelf. Try the Kilobaud Library Shelf Boxes, ... sturdy corrugated white dirt resistant cardboard boxes which will keep them from flopping around. We have self-sticking labels for the boxes, too, not only for Kilobaud, but also for 73 Magazine . . . and for Personal Computing, Radio Electronics, Interface Age, and Byte. Ask for whatever stickers you want with your box order. Hams may want our labels for CQ, QST or Ham Radio. They hold a full year of Kilobaud . . . or 73. Your magazine library is your prime reference, keep it handy and keep it neat with these strong library shelf boxes . . . One box is \$2.00, 2 boxes are \$3.00 and eight boxes are \$10.00. Be sure to specify which labels we should send. Have your credit card handy and call our toll-free order number 800-258-5473, or use the order card in the back of the magazine and mail to:

KILOBAUD LIBRARY SHELF BOXES Peterborough, NH 03458

SEND FOR THESE GREAT BOOKS



TODAY:



• HOBBY COMPUTERS ARE HERE! If you (or a friend) want to come up to speed on how computers work . . . hardware and software . . . this is an excellent book. It starts with the fundamentals and explains the circuits, the basics of programming, along with a couple of TVT construction projects, ASCII-Baudot, etc. This book has the highest recommendations as a teaching aid for newcomers. \$4.95

• THE NEW HOBBY COMPUTERS This book takes it from where "HOBBY COMPUTERS ARE HERE!" leaves off, with chapters on Large Scale Integration, how to choose a microprocessor chip, an introduction to programming, low cost I/O for a computer, computer arithmetic, checking memory boards, a Baudot monitor/editor system, an audible logic probe for finding those tough problems, a ham's computer, a computer QSO machine . . . and much, much more! Everything of interest is there in one volume. Don't miss this tremendous value! Only \$4.95

Have your credit card handy and call toll-free 800-258-5473, or use the card in the back of this magazine and send your check to:

KILOBAUD Book Dept. Peterborough, NH 03458

SPECIAL:

(orders will be filled on a first-in, first-out basis)






SPECIAL

● HOW TO BUILD A MICROCOMPUTER—AND REALLY UNDERSTAND IT—BK7325—by Sam Creason. The electronics hobbyist who wants to build his own microcomputer system now has a practical "How-To" guidebook. Sam Creason's book is a combination technical manual and programming guide that takes the hobbyist step-by-step through the design, construction, testing, and debugging of a complete microcomputer system. This book is must reading for anyone desiring a true understanding of small computer systems. \$9.95.*

Have your credit card handy and call toll-free 800-258-5473, or use the card in the back of this magazine and send your check to:

KILOBAUD Book Dept. • Peterborough NH 03458

1977 KB BACK ISSUES

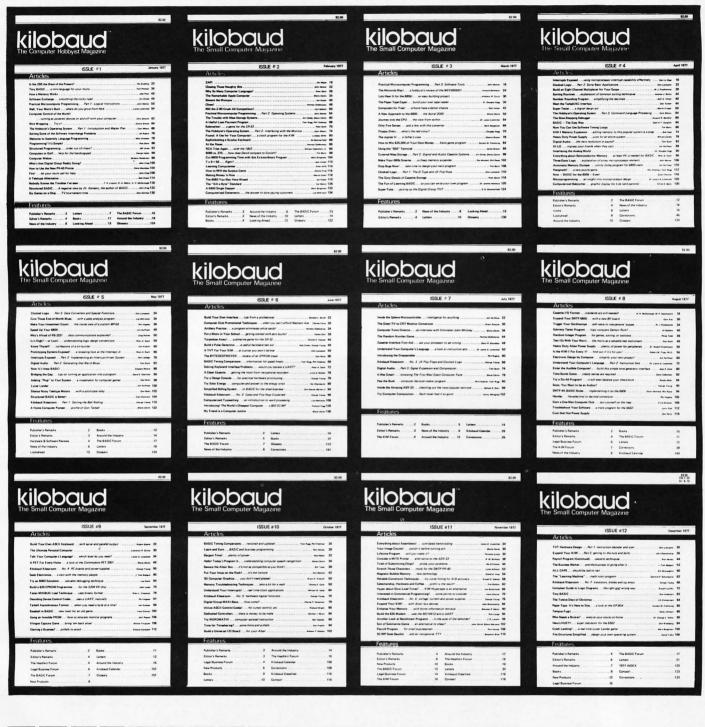

| All issues subject to availability! Issue #1—\$5.00; #2 thru #12—\$3 ea.; #13 & #14—\$10 ea. Please send Kilobaud back issues: issues JAN 77-\$5 issues MAY 77—\$3 | issues SEPT 77—\$3 issues OCT 77—\$3 issues NOV 77—\$3 | Add \$1.00 shipping & handling for all orders under \$10.00. □ BankAmericard/Visa □ Master Charge □ American Express |
|--|---|---|
| issues FEB 77—\$3issues JUNE 77—\$3issues MAR 77—\$3issues JUL 77—\$3issues APR 77—\$3issues AUG 77—\$3 | issues DEC 77—\$3 issues JAN 78—\$10 issues FEB 78—\$10 | Card #Expiration date |
| TOTAL: | | Name |
| Have credit card # handy a TOLL FREE (800) 258-54 | | Address |
| KB/9/78 Kilobaud ● Peterborough N | | City State Zip |

FULL SIZE FLOPPY DISK \$995 COMPLETE!

DISCUS I'" full-size floppy disk system is an overnight success ... because it's delivered so complete you can have it running in a single evening.

For just \$995, it's a complete memory system. Complete with all hardware and software. Completely assembled. Completely interfaced. And tested as a complete system.

And you can not only solve your memory shortage faster, you can solve it longer . . . because DISCUS I'm is a full-size floppy system with 3 times the storage and 5 times the speed of mini-floppies.

Your \$995 DISCUS I™ system includes a Shugart 800R full-size drive with power supply in a handsome freestanding cabinet, our 8-drive capacity S-100 controller with on-board buffer and serial interface, all cables and connectors, and all the software you need. Your


software library includes DOS, text editor, 8080 assembler (all integrated in DISK/ATE**), our BASIC-V** advanced virtual disk BASIC able to handle a wide variety of data formats and address up to 2 megabytes and patches for CP/M*. And it's all interfaced to your controller's serial I/O port to avoid I/O guesswork.

And it's all yours for \$995. We even offer CP/M for just \$70, Micro-Soft Extended Disk Basic for just \$199 and Micro-Soft Fortran for just \$349 as nice options to add to your library.

No wonder it's an overnight success!

See DISCUS I™ today at your local computer shop. Or if unavailable locally, send your check or money order direct to Thinker Toys™ (add \$7 for handling; California residents add tax). Or call (415)-524-5317, 10-5 Pacific Time.

*CP/M is a trademark of Digital Research.

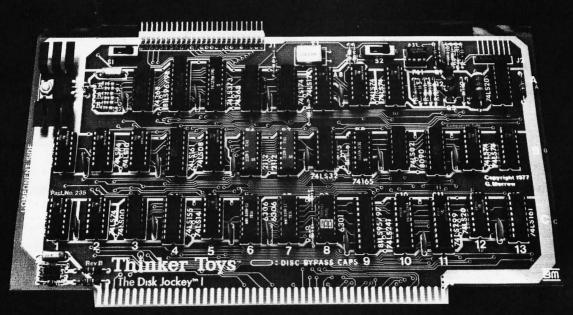

A product of Morrow's Micro-Stuff for

Thinker Toys"

1201 10th Street Berkeley, CA 94710

kilobaud

index of advertisers

Advanced Computer Products 139, 141
Alpha Data Systems 55
8 & Ginterlaces 132
Biofeedback Instrument Co. 133
The Bottom Shaft, Inc. 104
Byte Shop East, Inc. 124
Cload House 130, 133
Component Sales, Inc. 122
The Computer Corner 104
Computer Gorner on N.55
The Gomputer Corner 104
Computer Gorner on N.55
The Gomputer Data Directory 131
Computer Enterprises 122
Computer Interlace Technology 31
The Computer Pantry 130
Computer Pantry 130
Computer Pantry 130
Computer Systems Design 114, 129
The Computer Systems Store 132
Computer Systems Design 114, 129
The Computer Systems Store 132
Computer Systems Design 114, 129
The Computer Systems Store 132
Computer One 55
Computer Workshop 158
Computers 132
Contemporary Marketing 75
Data Vector Corporation 104
Datatronics, Inc. 119
Data Electronics 147, 149
Data Electronics Interprises 127
Detroniks 132
Digital Research Corporation 140
Diversitied Micro Products Corp. 129
Ecosoft 130
Electronics Emporium 137
Electronics Systems 134, 135
Esmark, Inc. 125
Esstor-Destoo Products 31
Floto, Charles 130
Forethought Products 114
Godbour Electronics 144, 151
GRE 104
D. C. Hayes Associates, Inc. 105
Innovative Technology 132
Integrand Research Corp. 129
Integrand Research Corp. 130
International Micro Computer Exposition 121
Intertec Data Systems CIV
Jameco Electronics 144, 126
Jameco Electronics 130
For Computer Computer Systems CIV
Jameco Electronics 146
International Micro Computer Systems CIV
Jameco Electronics 123
Infebrat Associates Inc. 126
Research Corp. 129
Integrated Circuits Computer Systems CIV
Jameco Electronics 127
Research Computer Systems CIV
Jameco Electronics 128
Pala Associates Inc. 126
Pala Rese M49 M17 M51 M50 M54 M44 M31 M50 M32 O5 O10 O2 O5 O09 P36 P9 P37 P37 P39 P37 P34 P35 P21 Q3 R17 R12 R8 R23

A

Name _ Address City ____

Send for your free product catalogs

Return this card to receive full information on the many fine products advertised in this issue. Simply circle the Reader Service # below for each advertised product. The codes appear in the index of advertisers on this page, and near the company's logo on the ad pages. Please provide a full address and zip code. (Limit: 25 requests)

| page, addre | and i | near i | he co | ompa e. (Lir | ny's l nit: 2 | ogo o 5 req | on the | e ad p | ages | . Ple | ase p | rovide | a full |
|-------------------------|--|---|--|---|---|--|---|--|--|---|--|---|----------------|
| | | | S | ubsc | riber | | | | ewss | stand | | | |
| | C28 C31 | C34 C46 C64 C65 C70 C73 C77 C79 C80 | D13 D20 D26 | D28 D30 D32 E29 E30 E34 E35 F4 | G4 G15 H20 I9 I13 I21 I24 J1 J4 | M17 M30 M31 M32 M44 M49 | N12 N13 O1 | O6 08 09 O10 P7 P9 P21 P24 P35 | P36 P37 P38 P39 Q3 R8 R12 R17 | S2 S6 S46 S51 S52 S54 S55 S56 S59 | S60 S61 T1 T11 T13 T26 T28 T36 T37 | T38 W13 W16 W20 | |
| This | mont | h's / | ARTIC | CLE V | VINN | IER (| title | page | num | ber): | 0 | | |
| Name | | | | | | | | | | | | - | |
| Addre | ess _ | | | | | | | | | | | | |
| City_ | | | | | | | | State | | Zi | p | | 9/78 |
| | - | - | | - | | | | | | | | - | |
| | | | | | | | | | | | | FIRST CI Permit No porough I | |
| | BU | SIN | IES | S | RF | PLY | ' N | IAII | | | = | | |
| | No pos | tage sta | amp ne | cessary | | | | | | | | | |
| | Postag | e will b | e paid | by | | | | | | | | | |
| | | | | 44 | Mai | o C | tre | et | | | | | |
| | | | ete | rpoi | rou | gh F | | UJZ | 158 | | | | |
| ttn: M | lail O | rder | | | | THE PERSONAL PROPERTY. | | | | ********* | | | |
| adver adver page, | tised tised | s car in thi prod | d to is iss uct. The co | recei ue. Si The c ompa e. (Lir | ve fu imply odes ny's mit: 2 | circl appe logo | orma e the ear in | tion of Read the i e ad p s) | on the der So ndex page: | e ma ervice of a s. Ple | ny fi e # be dverti ase p | ne pro low for isers o provide | each n this |
| | A38 | C34 | C81 | ubsc D28 | G4 | J12 | M51 | O6 | P36 | stand S2 | S60 | Tag | |
| | A48 B14 B28 B33 B34 C28 C31 C33 | C46 C64 C65 C70 G73 C77 G79 C80 | C82 C85 C86 C87 D13 D20 D26 D27 | D30 D32 E29 E30 E34 E35 F4 | G15 H20 I9 I13 I21 I24 J1 J4 | K14 M17 M30 M31 M32 M44 M49 M50 | M54 N9 N12 N13 O1 O2 O3 O5 | 08 09 010 P7 P9 P21 P24 P35 | P37 P38 P39 Q3 R8 R12 R17 R23 | \$6 \$46 \$51 \$52 \$54 \$55 \$56 \$59 | S61 T1 T11 T13 T26 T28 T36 T37 | T38 W13 W16 W20 | |
| This | mont | h's A | ARTIC | CLE V | VINI | IER (| title | page | nun | iber) | 8 | | |

State

FIRST CLASS Permit No. 17 Peterborough NH 03458

*U.S. & Canada only.

BUSINESS REPLY MAIL

No postage stamp necessary if mailed in the United States

Postage will be paid by



Attn: Reader Service

☐ 1 year @ \$18*

☐ 3 years @ \$36*

SUBSCRIBE!

| aty. | Catalog # | Description | Unit Price | Total |
|--------|--|---------------------------------------|-------------------------------------|---------|
| | Odtalog # | Description | Ontrice | TOTAL |
| | | | | |
| _ | | | | |
| | | | | |
| | | | | |
| | Add | \$1.00 shipping & handling for orders | under \$10.00 | |
| Coup | on expires in 60 da | ys. | Total: | |
| Enclo | sed \$ | ☐ Check ☐ Money order | _ | |
| Bill m | y: American Ex | press BankAmericard/Visa | ☐ Master Cha | arge |
| Credi | t card # | | | |
| Expir | ation date | Signature | | |
| Nam | e | | | |
| Addr | ess | | | |
| | | State | _ Zip | |
| City. | | | | |
| City. | | | the same of the same of the same of | |
| City. | THE RESIDENCE OF THE PARTY OF T | | | - |
| City. | туран Артанута, тураунун жаначанда теген | | FIRS | T CLASS |
| City. | | | | T CLASS |
| City. | | | Perm | |

(kilobaud)

Peterborough NH 03458

Renewal-Expira. date_

☐ New subscription

kilobaud

books, etc.

BK1074 BASIC Computer

Games-\$7.50 BK1081 BASIC New 2nd Edition-BK1011 CMOS Cookbook-\$9.95 BK7322 Hobby Computers Are

Here! -\$4.95 BK7325 How To Build A Micro-

computer-And Really Understand It-\$9.95

BK1131 Instant BASIC-\$6.00 Instant Software From Kilobaud SP0101 BASIC Lunar Lander/Ir termediate Lunar Lander-\$7.95

SP0104 Beginner Backgammo Keno-\$7.95

SP0106 Mortgage With Prepay ment Option/Financier-\$7.9 SP0105 Personal Weight Con-

trol/Biorhythms-\$7.95 SP0102 Space Trek-\$7.95

BK1032 Introduction To Micropro cessors-\$17.50 USA; \$20 Els where

Kilobaud Coding Sheets PD1001 Assembly/Machine La guage-\$2.39 PD1002 BASIC-\$2.39

BK1037 Microprocessor Interfacing Techniques-\$9.95

BK1137 Microprocessor Lexicon-Acronyms And Definitions-

BK1140 Programming In Pascal-

Scientific Research Instruments **BASIC Software Library** LB1002 Vol. I-\$24.95, LB1003 Vol. II-\$24.95, LB1004 Vol. III-\$39.95, LB1005 Vol. IV-\$9.95, LB1006 Vol. V-\$9.95, LB1007 Vol. VI-\$49.95, LB1008 Vol. V

BK1012 The "Compulator" Book-Building Super Calculators & Minicomputer Hardware With Calculator Chips—\$7.95

-\$39.95

BK7340 The New Hobby Computers-\$4.95


BK1063 TTL Cookbook-\$8.95 BK1064 TVT Cookbook-\$9.95

BK1071 What To Do After You H Return-\$8.00

BK1172 Your Home Computer-\$6.00

Attn: Mail Order

Postage will be paid by

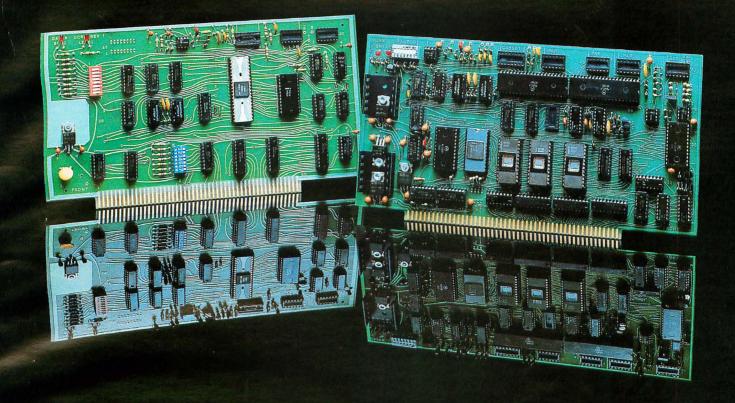

Two To The Byte Power

THE I/O POWER YOU NEED:

Our Universal Cassette Recorder Interface speaks to cassettes in three languages — biphase (Tarbell), CUTS, and Kansas City — at speeds from 600 to 40,000 baud. In addition, on-board relays control two recorders. A keyboard or other external device can speak to your CPU via the UCRI's parallel input port. S-100 compatible.


Teletek's System Central Interface (SCI), the most powerful interface on the market, gives you all of the features of the UCRI plus a 2708 programmer, serial port, three parallel ports, on board EPROM's, reset-jump, RAM, monitor program, and more.

For unexcelled Byte Power, call or write Ann Roberts, Department 36, at (916) 351-0535.

TELETEK: QUALITY PRODUCTS, A DECADE OF SERVICE

SEE YOUR DEALER OEM CONTRACTS AVAILABLE



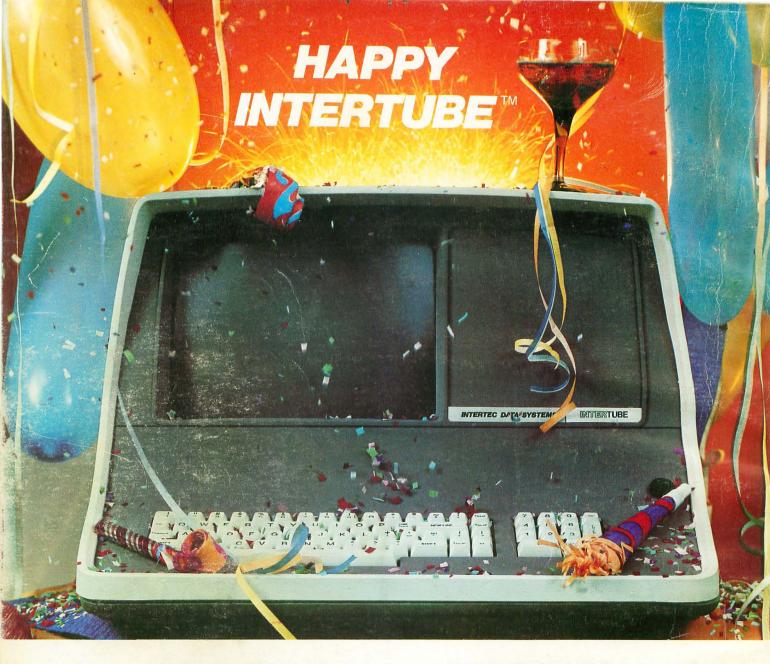

784 Reasons to Celebrate

The party's over for all dumb terminals and a lot of smart ones too. But, at \$784 (quantity one), the party's just beginning for Intertec's INTERTUBE.

Standard features to celebrate include a full 24 line by 80 character display, 128 upper and lower case ASCII characters, reverse video, complete cursor addressing and control, an 18 key numeric key pad, special function keys, blinking, a self-test mode, protected fields, line and/or character editing capabilities, eleven special graphic symbols and an RS-232 printer port.

You'll discover even more reasons to celebrate when you sit down in front of an INTERTUBE. Our special AccuDot focusing technique produces crisp, sharp characters on a non-glare screen. INTERTUBE's Z-80 processor assures extreme flexibility with operator oriented features to boost the efficiency of both software and programmers. And, if service is ever required, INTERTUBE's well-designed modular component layout insures quick service by a nation-wide factory-trained network providing more than 250 local dealer and service center outlets.

iNTERTUBE's combination of price and performance can satisfy your requirements whether it be a sophisticated data entry application or a simple inquiry/response environment. So, there's really no reason to think "dumb" when you can afford to be so smart!

There's an INTERTUBE celebration going on near you. Contact us at one of the numbers below for the name and location of the nearest party. We'll be surprised if you don't come (BYOB). Happy INTERTUBE!

INTERTEC DATA SYSTEMS

Corporate Headquarters

1851 Interstate 85 South Charlotte, North Carolina 28208 704/377-0300 Eastern Regional Marketing

19530 Club House Road Gaithersburg, Maryland 20760 301/948-2400 Western Regional Marketing

17952 Sky Park Blyd. Irvine. California 92714 714/957-0300